


XTREME 256-C

256 Port Fan-In L-Band RF Matrix Switch

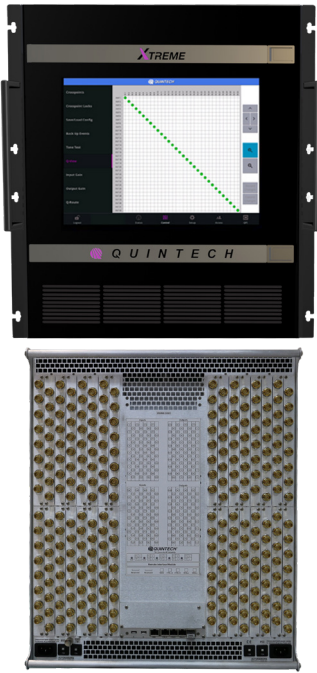

XTREME 256-C

General Description:

The **XTREME 256-C** next generation L-band matrix switch features 256 ports in a compact 12 RU chassis. The **XTREME 256-C** is a full fan-in (combining), non-blocking switch where one or multiple inputs can be routed to an output. The **XTREME 256-C** features an industry exclusive flexible matrix architecture (patented) that supports both symmetric and asymmetric configurations of 256 combined inputs and outputs in a single chassis. Asymmetric configurations such as 192x64, 160x96, and more can be implemented as well as the standard 128x128 configuration. It is designed for maximum reliability with redundant power, fans trays, and control cards plus RF redundancy. It is also designed for ease of maintenance with built-in self-test (BIST) capability and the ability to hot-swap all active components from the front of the unit. The **XTREME 256-C** is highly scalable and can easily be expanded up to 2048x2048 using multiple **XTREME 256-C** modules. Optional integrated expansion ports allow for large systems without using external expansion modules, significantly reducing system size and number of cables.

Features & Benefits:

- Compact modular design, 256 ports in 12 RU, easily expandable to 2048x2048
- Asymmetrical configurations up to 248 inputs in a single chassis
- Adjustable gain on inputs allow RF performance optimization
- Option for fiber optic inputs
- Touchscreen local control and embedded web GUI interface
- Easy hot-swap of all active cards, power supplies, and fan trays from the front
- Redundant hot-swap control cards plus independent GUI control system
- Remotely controlled via web browser GUI interface, SNMP, TELNET or TCP/IP via customer supplied PC

Specifications:*1	XTREME 256-C
Configuration:	128 Inputs/128 Outputs
RF Connectors:	F-Type, BNC 75 Ω or 50 Ω, SMA, Mixed or Optical Input Receivers SC/APC or LC/APC
Impedance:	75 Ω or 50 Ω
Operating Frequency:	850-2450 MHz
Frequency Response:	± 3 dB ± .75 dB Over Any 36 MHz Channel
Input P1dB:	+6 dBm
Noise Figure:	<23 dB @ 0 dB Gain
OIP3:	+15 dBm
Input Return Loss:	14 dB Typ. 12 dB Min.
Output Return Loss:	15 dB Typ. 12 dB Min.
Isolation (input-to-input):	75 dB Typ. 65 dB Min.
Isolation (output-to-output):	75 dB Typ. 65 dB Min.
Isolation (input-to-output):	60 dB Typ. 55 dB Min.
Input Gain Range:	-17.5 dB to +14 dB in 0.5 dB Steps
RF Sensing:	+10 dBm to -50 dBm
Output P1dB:	+14 dBm
Local Control:	15" Front Panel Touchscreen
Remote Control:	SNMP, TELNET, TCP/IP; Web Browser Interface Via Ethernet, Remote Panel
Inter-Module Control Data:	XR Bus
Power Requirements:	100-250 VAC Autoranging, 50/60 Hz
Power Consumption:	525 W @ 120 VAC 650 W @ 240 VAC
Size:	12 RU Total Rack Space Required, 21" H x 19" W x 20.5" D to Rear Panel 22" (Including Rear Handles)
Weight:	150 lbs