


SMB3315 Board Satellite Modem



The SMB3315 Satellite Modem Board is supported on multiple platforms to cover the widest range of markets and applications. The modem shares a wide range of key features and can be easily mixed in a single satellite network on either Evolution, Velocity, Dialog, or Intuition. The modem is extremely flexible as it can leverage several different return waveform technologies across multiple platforms*: ATDMA, MF-TDMA, high-rate SCPC and Mx-DMA MRC which seamlessly combines MF-TDMA flexibility with on-demand variable bandwidth allocation of SCPC while guaranteeing the highest efficiency and availability. The SMB3315 also supports wideband operations up to 500 Msps in the forward channel, enabling service providers to set-up any type and size of network on HTS/VTS.

The SMB3315 Board is suitable for integration into highly compact COTM terminals for the government and defense, broadcast and mobility markets. It offers unprecedented performance in a modem board, supports a broad array of mobility capabilities and is fully equipped to operate on HTS spot beams satellites.

The SMB3315 is also available in a desktop form factor, the MDM3315.



Markets

- Mobility
- Enterprise
- Cellular backhaul
- Maritime
- Government

Main Features:


- DVB-S2 (up to 45Msps) / DVB-S2X* (up to 500 Msps) outbound
- Supports DVB-S2X MODCODS up to 64APSK
- Return max rates up to 29 Msps (ATDMA), 64 Msps (SCPC), 25 Msps (Mx-DMA MRC)
- Ideal for both fixed and mobility applications with throughput rates up to 250/75 Mbps
- OpenAMIP and GXT file support for mobility
- Security features with Optional *AES 256 encryption
- ATMEL chip for authentication
- Embedded TCP acceleration, GTP acceleration and header compression



Network Configuration

| Network Topology | Rx | Tx | | | |
|---------------------|------------------------------------|-------------------------|------------------------------------|------------------------------------|------------------------------------|
| Dialog | DVB-S2/DVB-S2X* | MF-TDMA | Mx-DMA HRC | Mx-DMA MRC | SCPC |
| Modulation | QPSK, 8PSK, 16APSK, 32APSK, 64APSK | 4CPM | QPSK, 8PSK, 16APSK, 32APSK | QPSK, 8PSK, 16APSK, 32APSK, 64APSK | QPSK, 8PSK, 16APSK, 32APSK, 64APSK |
| Symbol Rates | 1 Msps to 500 Msps | Up to 7.6 Msps | Up to 20 Msps | Up to 40 Msps | 1 Msps to 64 Msps |
| Intuition | DVB-S2*/DVB-S2X | | Mx-DMA MRC | | |
| Modulation | QPSK, 8PSK, 16APSK, 32APSK, 64APSK | | QPSK, 8PSK, 16APSK, 32APSK, 64APSK | | |
| Symbol Rates | 1 Msps to 500 Msps | | Up to 40 Msps* | | |
| Velocity | DVB-S2 | Adaptive TDMA | | | |
| Modulation | QPSK, 8PSK, 16APSK, 32APSK | BSPK, QSPK, 8PSK | | | |
| Symbol Rate | 1 Msps to 45Msps | Up to 7.5 Msps | | | |
| Evolution | DVB-S2/DVB-S2X | Adaptive TDMA | | | |
| Modulation | QPSK, 8PSK, 16APSK, 32APSK, 64APSK | BSPK, QSPK, 8PSK, 16QAM | | | |
| Symbol Rate | 1 Msps to 128 Msps | 128 ksps to 29 Msps | | | |

*Platform or release dependent

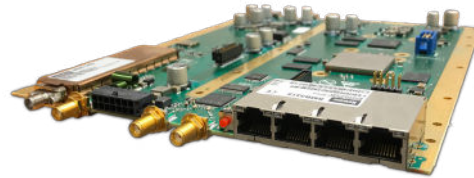

Modem Interfaces

Tx Interface

| | |
|---------------------|---|
| Connector | SMA 50 Ohm |
| Frequency range | 950-2400 MHz |
| TX level | -55 dBm to +5 dBm (Dialog) -45 dBm to + 5 dBm (Velocity) |
| BUC power supply | 24V / 4 Amps |
| BUC reference | 10/50 MHz |
| BUC reference level | +3 dBm |

Rx Interface

| | |
|----------------------------|------------------------------------|
| Connector | SMA 50 Ohm |
| Frequency | 950-2150 MHz |
| LNB power supply | 13/18VDC 500mA |
| LNB band selection | 13/18V or 22kHz tone, programmable |
| LNB polarization selection | 13/18 or 22 kHz tone, programmable |

Data Interface

LAN: Four 10/100/1000 Mbps Ethernet, auto MDI/MDIX

Management Interface

I/O header, 20 pin connector (includes reset function)
Power & Status signaling connector (14 pin)

**Platform or release dependent*

Management

Protocols Supported

UDP, IPv4 & IPv6, ICMP, TCP, IGMPv1, IGMPv2, ARP, DHCP, DNS, NTP, BGP, NAT, Diffserv Marking

Multilingual Web GUI

*Manage web GUI via configurable management IP address

Mechanical and Environmental

| | |
|---------------------|---|
| Dimensions | W 18.2 cm x D 23.5cm x H 2.0 cm (W 7.2 in x D 9.2 in x H 0.79 in) |
| Weight | 0.4 kg (0.88 lbs) |
| Temp: | Operating -25° to +55°C (-13° to +131°F) (subject to adequate heatsinking) |
| | Storage -40° to +60°C (-40° to +140°F) |
| Operating humidity: | 5 - 95% non-condensing |

Power Supply

| | |
|-------------------|--------|
| Input Voltage | 24 VDC |
| Power Consumption | <30W |

Development Kit

CAD drawings & Thermal & Mechanical design guidelines
Electrical interface specification & API description



ESATCOM INC.

3628 Francis Lewis Blvd.

Flushing, NY 11358

www.esatcom.com

Tel: 718.799.0084

Email: sales@esatcom.com