



RSLNBC11FRP

LNB Redundant Switch System 1:1


Band: C-Band

Connector Type: F-Connector Output

Options: 10 MHz Reference + Power Supply Connector

*Mating power connector is available as a standard optional.

Supported LNBs: N-conn LNBs up to Quad-band and non simultaneous-band. **Sold separately.**

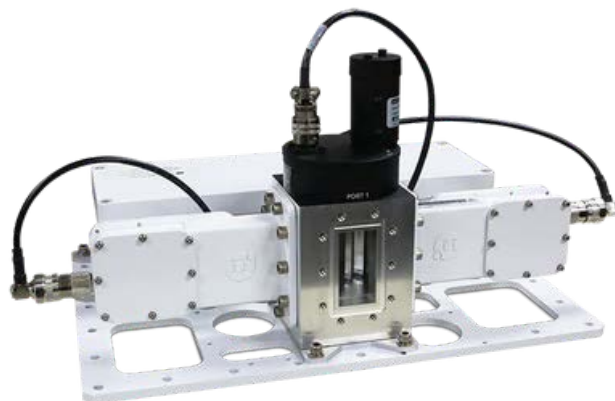

[Explore Video Course](#)



KEY SPECIFICATIONS

Band	C-Band
Input Frequency Band 1	950 - 2150 MHz
Redundancy	1:1
Switchover Time	550 ms max.

RF SPECIFICATIONS

Insertion Loss	Waveguide to LNB: 0.5 dB max.; LNB to Cable: 2.8 dB max.
----------------	--

ELECTRICAL SPECIFICATIONS

Power	100-240 VAC (50-60 Hz)
-------	------------------------

INTERFACE SPECIFICATIONS

Input Connector	WR-229
RF Output Connector	F-Connector

ENVIRONMENTAL SPECIFICATIONS

IP Rating	IP 66
-----------	-------



Innovative Communication Solutions

Relative Humidity	Operational: 8% - 100%; Storage: 10% - 100%
Temperature Operational	-40°C to +60°C
Temperature Storage	-50 to +80°C

PHYSICAL SPECIFICATIONS

Product Height	224.54 mm
Product Length	412.75 mm
Product Weight	6.8 kg
Product Width	304.80 mm

LOGISTICS SPECIFICATIONS

HS Code	Country of Origin	Ex Works	ECCN Number	Unit Package
8517690000	Made in Canada	Richmond, BC, Canada	EAR99	501.65 x 393.70 x 311.15 mm 8.16 kg

HOW TO ORDER

RSLNBKU11NRMP

KU - Ku-band
KA - Ka-band
C - C-Band
X - X-Band

Redundancy

BLANK - No Option
P - Redundant Power Supply Connector
(Power supply cable not included)

BLANK - No Option
M - Boom Mount (1:1 Redundancy Only)

BLANK - No Option
R - 10 MHz Reference
I - 10 MHz Injection via SMA (External Reference LNB)

F - F Connector Output
N - N Connector Output

11 - 1:1
12 - 1:2



MECHANICAL DIAGRAMS



Norsat
International Inc.

Innovative Communication Solutions

1:1 Switch

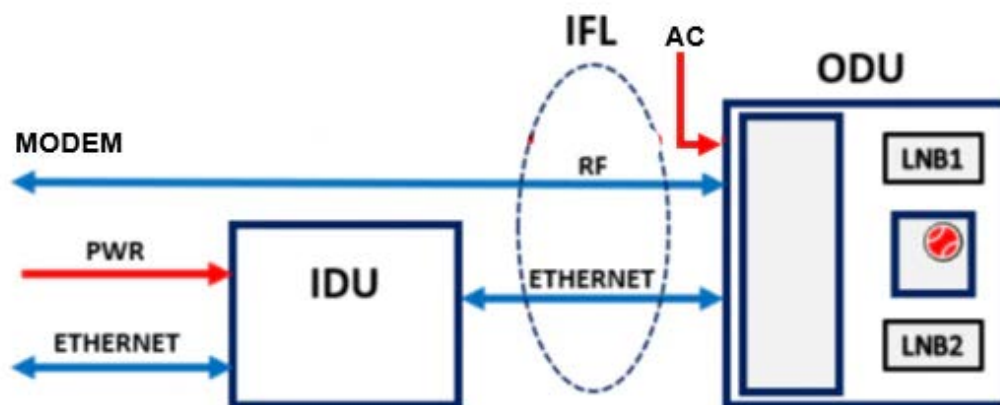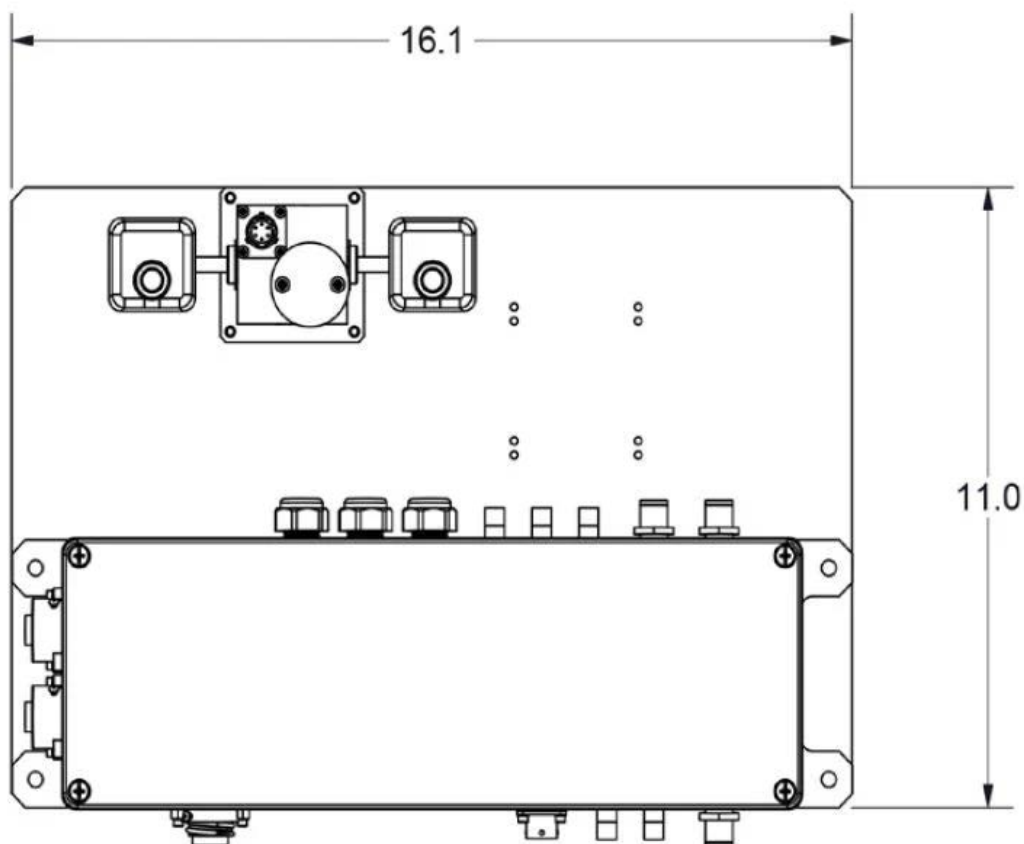

Norsat
International Inc.

ESATCOM
INC

Norsat authorized distributor

Esatcom Inc.

3628 Francis Lewis Blvd.

Flushing, NY 11358

www.esatcom.com

Tel: 718.799.0084

Email: sales@esatcom.com