

Ka-band 5W BUC

Model No. NJT5835L / NJT5835H

RF Frequency	:	27,652 to 28,388 MHz / 28,072 to 29,071 MHz
LO Frequency	:	26,600 MHz / 27,200 MHz
IF Frequency	:	1,052 to 1,788 MHz / 972 to 1,871 MHz
IF / Ref. (10MHz) Input	:	
	:	N-type Female Connector
DC Power Input	:	MS Connector / IF Connector (*)
M&C Option	:	Ethernet Interface M&C

There are two frequency ranges, a high band unit and a low band unit, which operate in different parts of the O3b spectrum. The low band units operate in O3b channels 1, 2, and 3. The high band units operate in O3b channels 3, 4, and 5.

Specifications Rev.00-02 August 7, 2014

*) The BUC is available to apply DC voltage via MS Connector or IF Connector.

Copyright 2014

New Japan Radio Co., Ltd.
Microwave Components Division

-Notice of Proprietary Information-

This documents and its contents are proprietary to New Japan Radio Co., Ltd. This publication and its contents may not be reproduced or distributed for any other purpose without the written permission of New Japan Radio Co., Ltd.





Caution

1. NJRC strives to produce reliable and high quality microwave components. NJRC's microwave components are intended for specific applications and require proper maintenance and handling. To enhance the performance and service of NJRC's microwave components, the devices, machinery or equipment into which they are integrated should undergo preventative maintenance and inspection at regularly scheduled intervals. Failure to properly maintain equipment and machinery incorporating these products can result in catastrophic system failures.
2. To ensure the highest levels of reliability, NJRC products must always be properly handled. The introduction of external contaminants (e.g. dust, oil or cosmetics) can result in failures of microwave components.
3. NJRC offers a variety of microwave components intended for particular applications. It is important that you select the proper component for your intended application. You may contact NJRC's sales office or sales representatives, if you are uncertain about the products listed in the catalog and the specification sheets.
4. Special care is required in designing devices, machinery or equipment, which demand high levels of reliability. This is particularly important when designing critical components or systems whose foreseeable failure can result in situations that could adversely affect health or safety. In designing such critical devices, equipment or machinery, careful consideration should be given to, amongst other things, their safety design, fail-safe design, back-up and redundancy systems, and diffusion design.
5. The products listed in the catalog and specification sheets may not be appropriate for use in certain equipment where reliability is critical or where the products may be subjected to extreme conditions. You should consult our sales office or sales representatives before using the products in any of the following types of equipment.
 - * Aerospace Equipment
 - * Equipment Used in the Deep Sea
 - * Power Generator Control Equipment (nuclear, steam, hydraulic)
 - * Life Maintenance Medical Equipment
 - * Fire Alarm/Intruder Detector
 - * Vehicle Control Equipment (automobile, airplane, railroad, ship, etc.)
 - * Various Safety Equipment
6. NJRC's products have been designed and tested to function within controlled environmental conditions. Do not use products under conditions that deviate from methods or applications specified in the catalog and specification sheets. Failure to employ NJRC's products in the proper applications can lead to deterioration, destruction or failure of the products. NJRC shall not be responsible for any bodily injury, fires or accidents, property damage or any consequential damages resulting from the misuse or misapplication of its products. PRODUCTS ARE SOLD WITHOUT WARRANTY OF ANY OF KIND, EITHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.
7. The product specifications and descriptions listed in the catalog and specification sheets are subject to change at any time, without notice.

2-22.	M&C monitor functions	Temperature Output Power LO Status
2-23.	M&C control functions [Gain control step] [Gain control range] [Power monitor dynamic range] [Power Monitor Accuracy]	1dB 0 to 15 dB 12 dB @ Pout = +24 to +36 dBm +/- 1.0 dB typ.
2-24.	Output mute command [Mute On/Off Isolation] External Mute Control	40 dB min. The BUC shall have an external mute control independent of the M&C function through access to connector pins. When an external open collector input is open, the BUC shall be muted. When this input is closed, the BUC shall be un-muted. <i>* Details of connector pins are mentioned on Input Interface Specifications.</i>
2-25.	DC power input	DC power shall be multiplexed onto the IF cable. Power may also be applied through a separate MS connector if provided.
2-27.	DC input voltage range	+22 to +56 VDC
2-28.	Power consumption	88W max.
2-30.	Power consumption of the BUC when in the mute condition	25W max.
2-31.	Weight	3.0 kg max.
2-33.	Dimension	168(L) × 149.6(W) × 90(H) mm without interface connectors and screws
2-35.	MTBF Based on Ta = +40°C	90,000 hours min.

3. Input Interface Specifications
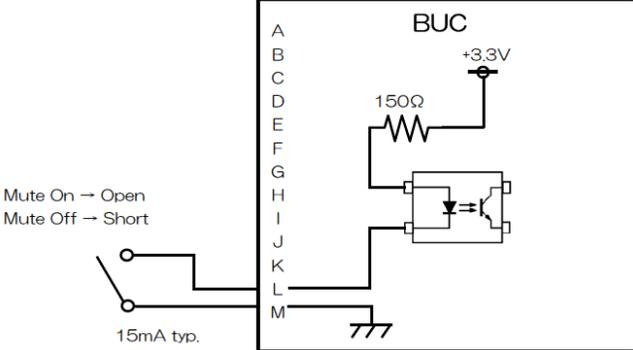
<p>3-1. Input Interface</p>	<p>[IF Connector]</p> <p>[DC Input*2]</p> <p>[External Mute]</p> <p>The BUC shall have an external mute control independent of the M&C function through access to connector pins. When an external open collector input is open, the BUC shall be muted. When this input is closed, the BUC shall be un-muted.</p>	<p>N-type, female IF / Ref. (/ DC) Input IF Connector or MS Connector</p> <p>- MS Connector - Part No.: PT02E-14-12P (025) Mating connector: PT06E-14-12S (470) Assignment:</p> <table border="1" data-bbox="857 478 1198 800"> <thead> <tr> <th>PIN #</th> <th>Function</th> </tr> </thead> <tbody> <tr><td>A</td><td>Tx - (Ethernet)</td></tr> <tr><td>B</td><td>Tx + (Ethernet)</td></tr> <tr><td>C</td><td>Rx + (Ethernet)</td></tr> <tr><td>D</td><td>Rx - (Ethernet)</td></tr> <tr><td>E</td><td>Option RTS (RS232)</td></tr> <tr><td>F</td><td>Option CTS (RS232)</td></tr> <tr><td>G</td><td>Option TxD (RS232)</td></tr> <tr><td>H</td><td>Option RxD (RS232)</td></tr> <tr><td>J</td><td>DC Power +</td></tr> <tr><td>K</td><td>DC Power - (Return GND)</td></tr> <tr><td>L</td><td>Mute +</td></tr> <tr><td>M</td><td>Mute - (Return)</td></tr> </tbody> </table>  <p>DC Power is applied through MS Connector using J and K Pins.</p>  <p>The terminal 'L' is pulled up to 3.3V by 150 ohm resistor and photocoupler in the BUC.</p>	PIN #	Function	A	Tx - (Ethernet)	B	Tx + (Ethernet)	C	Rx + (Ethernet)	D	Rx - (Ethernet)	E	Option RTS (RS232)	F	Option CTS (RS232)	G	Option TxD (RS232)	H	Option RxD (RS232)	J	DC Power +	K	DC Power - (Return GND)	L	Mute +	M	Mute - (Return)
PIN #	Function																											
A	Tx - (Ethernet)																											
B	Tx + (Ethernet)																											
C	Rx + (Ethernet)																											
D	Rx - (Ethernet)																											
E	Option RTS (RS232)																											
F	Option CTS (RS232)																											
G	Option TxD (RS232)																											
H	Option RxD (RS232)																											
J	DC Power +																											
K	DC Power - (Return GND)																											
L	Mute +																											
M	Mute - (Return)																											

*2: The BUC is available to apply DC voltage via MS Connector or IF Connector.


Caution: DO NOT apply DC voltage via both MS Connector and IF Connector.

If DC voltage is applied on both connectors, it may damage the unit or the unit may not operate properly.

4. Environmental Specifications

4-1.	Temperature Range (ambient) [Operating] [Storage]	-20 to +55 °C -20 to +55 °C
4-2.	Humidity	0 to 100 %
4-3.	Altitude	10,000 feet (3,048 m)
4-4.	Lightning protection	+/-5 kV max.
4-5.	Electrostatic discharge	+/-15 kV max.
4-6.	All exposed fasteners should be stainless or galvanized.	
4-7.	The BUC must be able to operate in dry and dusty environments typical of arid locations.	
4-8.	<p>The BUCs must be able to withstand salty environments typical of coastal locations. Cosmetic staining, oxidation, and/or tarnishing of the hardware may occur but shall not impact system operation or performance.</p> <p>MIL-STD-810G METHOD 509.3 Salt Fog</p> <p>Condition</p> <p>5 ± 1 percent salt solution</p> <p>35 ±2°C</p> <p>48 hours of exposure</p> <p>Criteria</p> <p>No corrosion</p>	
4-9.	The packaged BUCs shall survive with no damage under normal shock and vibration encountered in land, air, and sea transport.	

5. O3b Frequency Plan

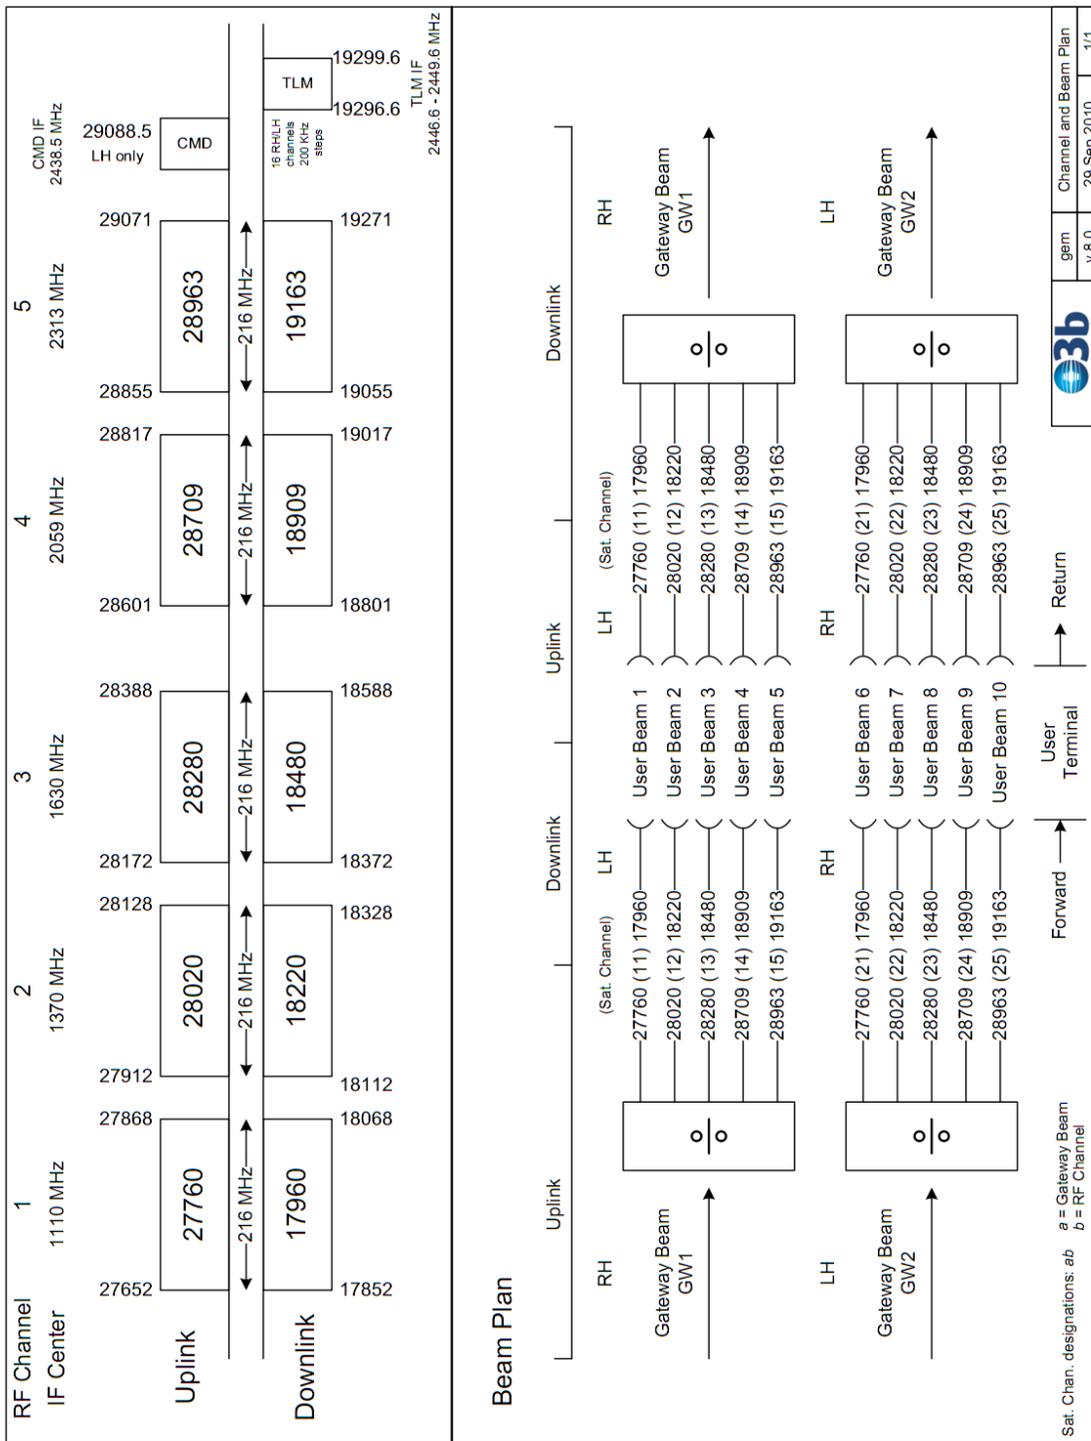


6. Outline Drawing

- IF / Ref. Input: N-type Female Connector
- MS Connector equipped


5W BUC Outline

New Japan Radio Co., Ltd. 2014.7.16
Rev. 1

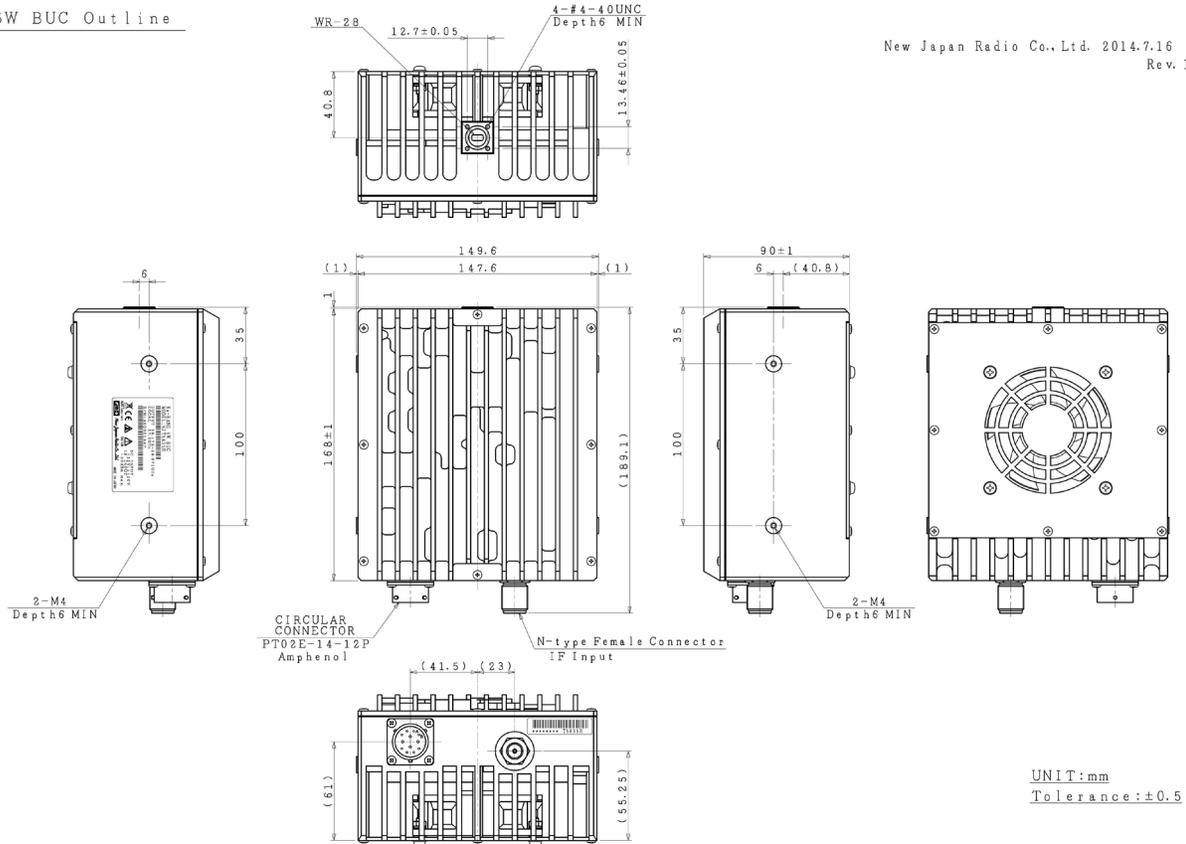


7. Label

Product Label
Model: NJT5835L

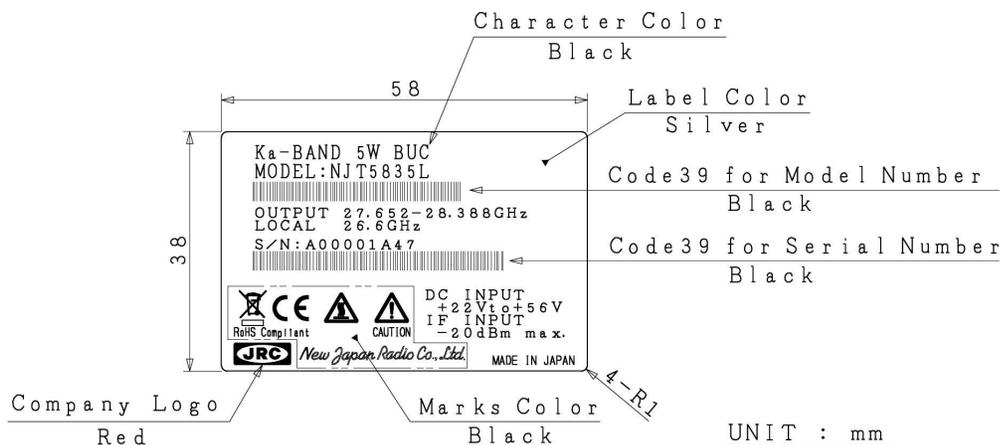

Serial Number (OSSSSSRYM) - ALPHANUMERIC (9 characters)

A00001A47



O: Overflow Number - ALPHABET (1 character)
"A" to "Z", e.g.: A99999 → B00001


SSSSS: Running Number - NUMBER (5 digits)
"00001" to "99999"

R: Revision Number - ALPHABET (1 character)
"A" to "Z"


Y: Production Year - NUMBER (1 digit)
Calendar Number, e.g.: 2009:9, 2010:0, 2011:1, 2012:2...

M: Production Month - ALPHANUMERIC (1 character)
"1" to "9", "X" as October, "Y" as November, "Z" as December

Product Label
 Model : NJT5835H

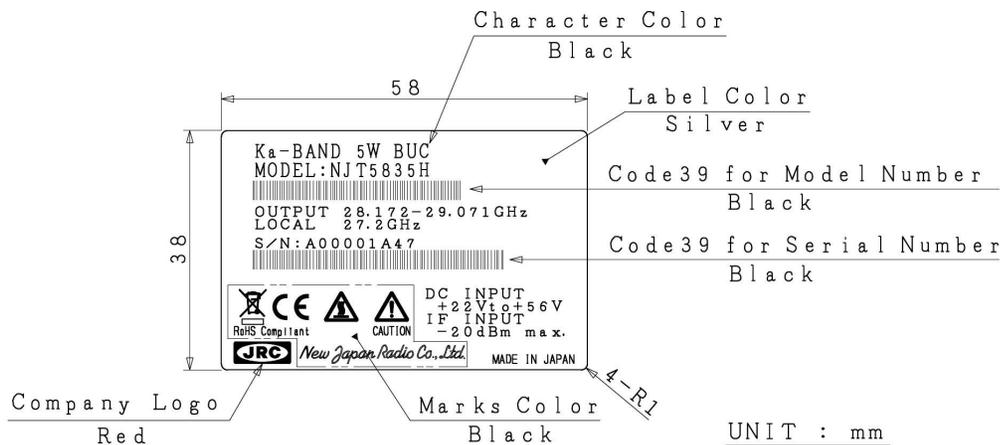

Serial Number (OSSSSRYM) - ALPHANUMERIC (9 characters)

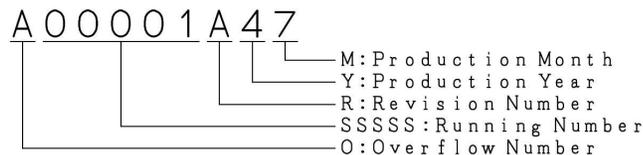

- O: Overflow Number - ALPHABET (1 character)
"A" to "Z", e.g.: A99999 ⇒ B00001
- SSSSS: Running Number - NUMBER (5 digits)
"00001" to "99999"
- R: Revision Number - ALPHABET (1 character)
"A" to "Z"
- Y: Production Year - NUMBER (1 digit)
Calendar Number, e.g.: 2009:9, 2010:0, 2011:1, 2012:2...
- M: Production Month - ALPHANUMERIC (1 character)
"1" to "9", "X" as October, "Y" as November, "Z" as December