



ETL Systems

New technologies
in RF distribution

Model Number:

SRY-G2S-TS6-311

SRY-G2S-RS6-312

StingRay RF Over Fibre Genus Module S-band modules with 22KHz and 13V/18V switchable LNB power

Typical applications:

- Teleports & Earth Stations
- Satellite Operations
- Government & Defence applications
- Telemetry, Tracking & Command
- High Resilience applications

StingRay S-band Transmit and Receive RF Over Fibre modules to fit Genus 2U chassis. The transmit module can provide LNB power 13/18VDC, 22kHz tone up to 500 mA. When fitted with a 10 MHz distributing module the TX module can inject an external or internal 10 MHz tone onto the S-band feed.

Resilience from dual redundant hot-swap power supplies & field replaceable CPU & HMI

Local control & monitoring via HMI high resolution touchscreen

Compact housed in a 2U high chassis with capacity for up to 17 modules

Variable voltage 13/18VDC, 22 kHz tone up to 500mA to LNBs

Hot Swap & replaceable modules

Field replaceable Internal 10MHz reference source and external reference inject port with auto detection (optional)

Remote control & monitoring via RJ45 Ethernet port with SNMP & web browser interface

For illustration only.

Chassis - Specification

Dimensions / Weight / Colour	2U high x 510mm deep x 19" wide / <10 kg / RAL9003—White (Semi-matte)
Capacity	Total of 17 module slots. Note that 1 slot may be used for fan (if required) and 1 slot may be used for 10 MHz EXT inject module (if required). Note actual modules may require >1 slot. Refer to required module spec table.
Temperature	Operating: 0°C to +45°C / Storage: -20°C to +75°C
Location / Humidity / Altitude	Indoor use only / 20 to 90% non-condensing / 10,000 feet AMSL (Operational) 30,000 feet AMSL (Storage) Above Mean Sea Level
Control & Monitoring	Local: HMI touch screen Remote: Ethernet via RJ45, 10BaseT/100 BaseTx. TCP/IP, SNMP V3 & HTTPS & Web browser interface HMI and CPU field replaceable. Each module independently monitored and reported.
MTTR	20 minutes (15 minutes to retrieve spare part and 5 mins to replace) Applies to LRUs only and assumed in house stock
AC Input / Consumption	85-264Vac 50/60Hz / 150W
PSU Redundancy	Dual redundant and alarmed Diode OR. Hot swappable
Input & Output ports	Dependant upon module fitted

ETL SYSTEMS LIMITED
Coldwell Radio Station
Madley
Hereford
England HR2 9NE


TELEPHONE
+44 (0)1981 259020

EMAIL
info@etlsystems.com

FACSIMILE
+44 (0)1981 259021

WEB
www.etlsystems.com



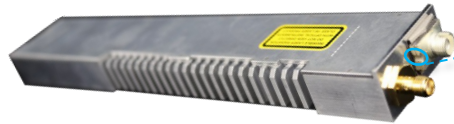

StingRay Module

Compact form factor allowing multiple modules to be housed in 2U chassis. Each module uses 1 slot in the chassis.

StingRay TX & RX Module - RF Parameters		
Model Numbers	SRY-G2S-TS6-311	SRY-G2S-RS6-312
Frequency Range	500-3150 MHz	
Flatness (dB)	850 to 2150 MHz	±1.5 dB, Fixed gain mode, input -10 dBm, output -10 dBm.
	500 to 3150 MHz	±2.0 dB, Fixed gain mode, input -10 dBm, output -10 dBm.
	any 36MHz	±0.25 dB, Fixed gain mode, input -10 dBm, output -10 dBm.
	Output AGC Flatness	-
Return Loss (dB)	50 ohm SMA	18 dB typ., 14 dB min
	50 ohm BNC	18 dB typ., 14 dB min
	75ohm BNC	14 dB typ., 10 dB min
	75 ohm F-type	14 dB typ., 10 dB min
Gain Setting Modes	Manual Gain Control (MGC), Automatic Gain Control (AGC), Fixed Gain (FG)	
Manual Gain Range	60dB in 0.5dB steps (The MGC gain mode allows link optimisation for better Noise or Distortion performance)	
Monitor Port	-20dBc +/-3dB	
OIP3	Full Band	Typical 20 dBm, Worst Case 17 dBm Test condition: 1m fibre, 10dB gain, -20 dBm I/P Power, -10dBm O/P Power. -22dBm Tones
	850-2150MHz	Typical 23 dBm, Worst Case 20 dBm Test condition: 1m fibre, 10dB gain, -20 dBm I/P Power, -10dBm O/P Power. -22dBm Tones
CNR (in any 36 MHz)	Typical -50 dB, Worst Case -45 dB Test condition: 1m fibre, -10 dBm RF i/p power, -10 dBm RF o/p total power.	
Noise Figure	Typical 9 dB, Worst Case 12 dB Test condition: 1m fibre, -50 dBm RF i/p power, -10 dBm o/p power	
Group Delay Variation	<2ns over full band. <0.5ns over any 36MHz.	
SFDR	Full Band	103 dB/Hz ^{2/3} typ., 98 dB/Hz ^{2/3} min Test condition: 1m fibre, 10dB gain, -22 dBm tones
	850-2150MHz	107 dB/Hz ^{2/3} typ., 102 dB/Hz ^{2/3} min Test condition: 1m fibre, 10dB gain, -22 dBm tones
RF Signal Range	Input: -70 to -10dBm (total power) Operational i/p range (Note that all Specifications are only 'typical' between -60 & -70dBm unless otherwise detailed).	Output: -70dBm to -10dBm (total power) o/p range available under all i/p conditions. (Note that all Specifications are only 'typical' between -60 & -70dBm unless otherwise detailed).
Max RF input	16dBm total power. Damage level, NOT operational.	-
10 MHz level at output	-10 to +10dBm. User settable level via the chassis. Accuracy ±1dB	-10 to +10dBm. User settable level via the chassis. Accuracy ±1dB
10MHz isolation	-40 dB. Between adjacent modules in same chassis	-40 dB. Between adjacent modules in same chassis
Laser Type	DFB. Optical isolator for improved performance	
Optical Wavelength	1310 ± 10 nm	1100 to 1650nm. Optimised for 1310nm and 1550 nm
Optical Power	Output: 4.5 ±2.5 dBm. 3.8 dBm typical	Input: 0 to 4.5dBm. Max 10 dBm
LNB Power	18/13V ± 5%, 500mA max	-
Optical Connectors	FC/APC, SC/APC, E2000/APC, Single mode fibre. Use angle polish connectors only	
Power Consumption	15W Typical. With 18V 500 mA LNB Power.	4 W Typical
Module Swap	Hot swap	
MTBF	>200,000 hours.	
Spec Version	1.0	1.0

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.

Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.