

#### **Innovative Communication Solutions**

## 9700 Dual-Band Ka-Band PLL LNB

Frequency: BC: 19.2 - 20.2 & 20.2 - 21.2 GHz W/G Isolator:<sup>Yes</sup> Connector: F: 75 Ohm



#### **KEY SPECIFICATIONS**

Band	Ka-Band
Dailu	κα-μαιια
Input Frequency Band 1	19.20 - 20.20 GHz
Input Frequency Band 2	20.20 - 21.20 GHz
LO Frequency 1	18.25 GHz
LO Frequency 2	19.25 GHz
LO Stability	±70 kHz
LO Туре	PLL
Noise Figure Max	1.3 dB
Noise Figure Typ	1.6 dB
Of Onboard Los	Dual-band
Output Frequency Band 1	950 - 1950 MHz
Output Frequency Band 2	950 - 1950 MHz

#### **RF SPECIFICATIONS**

Control Signal 1	13V / No Tone
Control Signal 2	18V / No Tone
Conversion Gain Max	65 dB
Conversion Gain Min	55 dB
Conversion Gain Typ	60 dB
Gain Flatness (over Full Band)	≤ 5 dB p-p
Input VSWR	2.5 : 1 max.
Output P1db	+ 5 dBm min.




CE



# Norsat

			Innovative Com	nmunication Solution		
Output VSWR		2	2.5 : 1 max.			
Phase Noise 100khz C	Offset Max	-9	-95 dBc/Hz			
Phase Noise 10khz Offset Max			-78 dBc/Hz			
Phase Noise 1khz Offs	set Max	-7	-70 dBc/Hz			
ELECTRICAL SPECIFICATIONS						
Power Requirements		+	+12 to +24V DC			
INTERFACE S	<b>SPECIFICATION</b>	S				
RF Input Connector		V	WR-42 waveguide grooved			
ENVIRONMENTAL SPECIFICATIONS						
Temperature Operation	nal	-4	-40 to +60°C			
Temperature Storage	ure Storage -40 to +80°C					
PHYSICAL SF	PECIFICATIONS					
Product Dimensions (LxWxH)			120 x 60 x 45 mm			
Product Weight		4	420 g (14.82 oz)			
LOGISTICS S	PECIFICATIONS	6				
HS Code	Country of Origin	Ex Works	ECCN Number	Unit Package		
8517690000	Made in Korea	Korea	EAR99	N/A   N/A		
HOW TO ORDER						

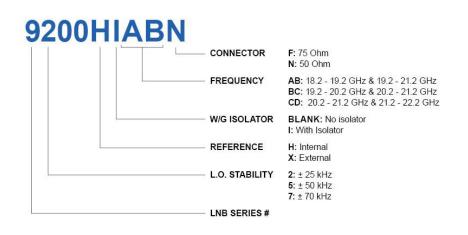


### **MECHANICAL DIAGRAMS**



CE



#### **Innovative Communication Solutions**

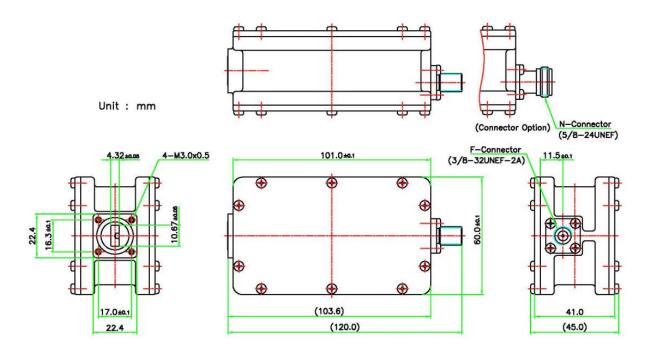



Esatcom Inc Norsat authorized distributor www.esatcom.com Tel 718.799.0084 Email sales@esatcom.com