



# ELMTBKU040HT-AN-

## M

### ELEMENT 40W Ku-Band MINIBUC (High Temperature Range)

**Input Frequency:** 12.75 - 13.25 GHz

**Input Connector:** N-Connector

**M&C Function:** RS-232 & RS-485



### KEY SPECIFICATIONS

Band	Ku-Band
External Ref Freq	10 MHz, -5 to +5 dBm
Input Frequency Band 1	950 - 1450 MHz
LO Frequency 1	11.80 GHz
Output Frequency Band 1	12.75 - 13.25 GHz
Output Power Rated	40W
Reference Type	Internal Reference

### RF SPECIFICATIONS

Gain Flatness (over 54mhz)	1.5 dB
Gain Flatness (over Full Band)	4 dB
Gain Flatness (over Temperature)	4 dB
Input VSWR	2 : 1 max.
Linear Gain	72 dB typ.
Output P1db	+46 dBm min. over temperature
Output Spurious In Band	-60 dBc
Output Spurious Out Of Band	-50 dBc
Output VSWR	2 : 1 max.
Phase Noise 100khz Offset Max	-95 dBc/Hz
Phase Noise 10khz Offset Max	-85 dBc/Hz
Phase Noise 1khz Offset Max	-75 dBc/Hz

### ELECTRICAL SPECIFICATIONS

Current Consumption	390W max.
---------------------	-----------





Power Requirements

+36 to +60V DC

## INTERFACE SPECIFICATIONS

Frequency Sense

Non-inverted

IF Connector

N-Connector

## ENVIRONMENTAL SPECIFICATIONS

Humidity

Up to 100%

IP Rating

IP 55

Temperature Operational

-40 to +60°C

## PHYSICAL SPECIFICATIONS

Internal Function

Lock detector shuts off Tx in case of LO unlocked

Product Dimensions (LxWxH)

245 x 125 x 125 mm

Product Weight

4 kg

## LOGISTICS SPECIFICATIONS

HS Code

Country of Origin

Ex Works

ECCN Number

Unit Package

8543700000

Made in Korea


Korea

EAR99

290 x 270 x 250 mm |  
4.5 kg

## HOW TO ORDER

# ELMTBKU040HT-EF-E

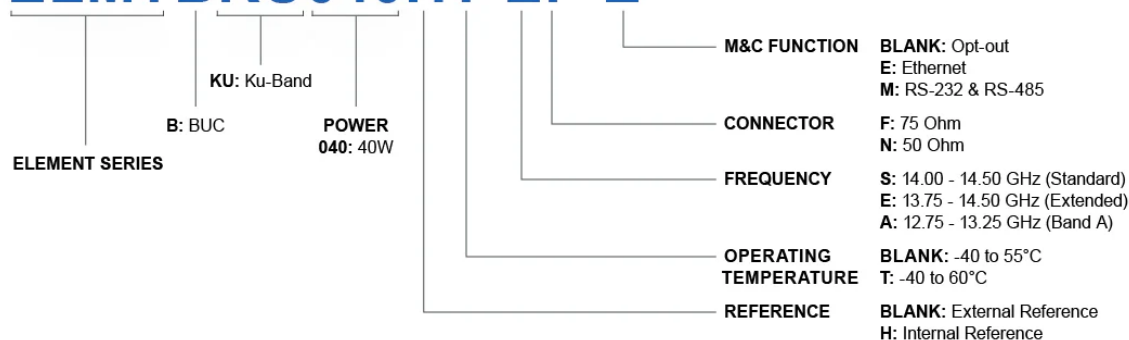


## MECHANICAL DIAGRAMS





Norsat  
International Inc.

## Innovative Communication Solutions

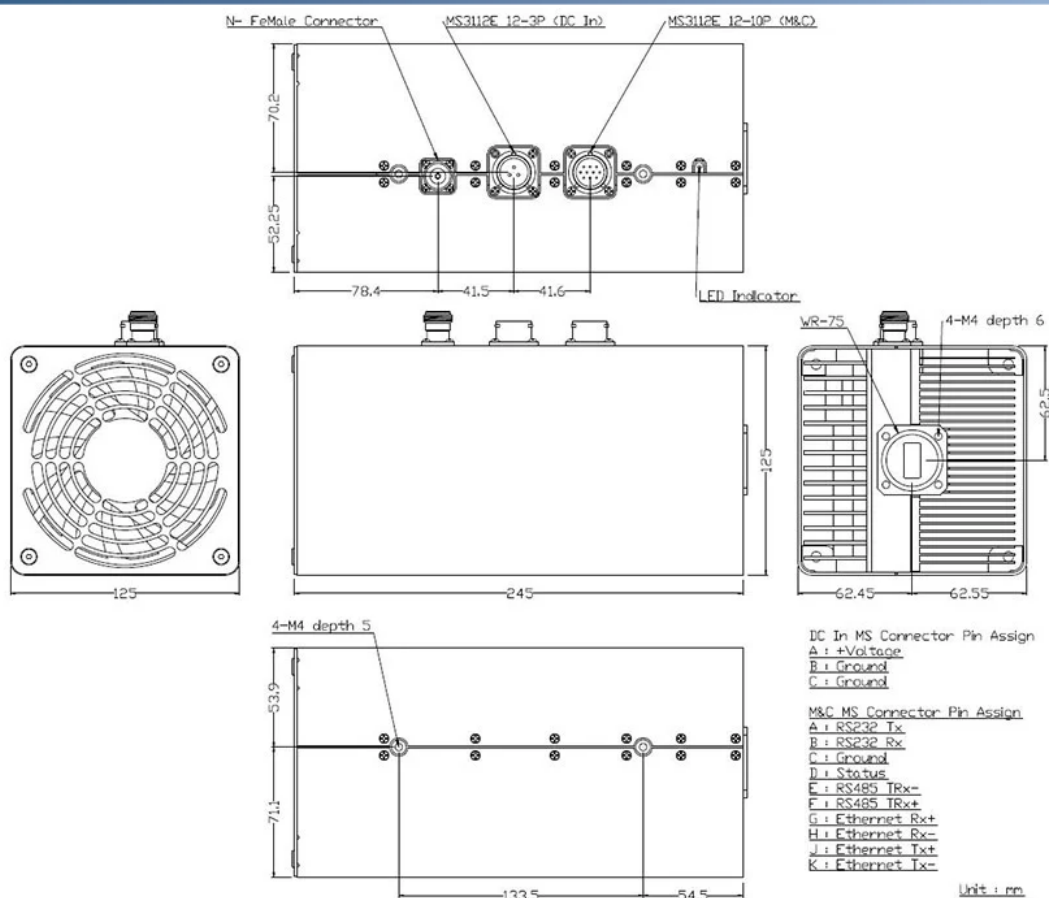

Esatcom Inc  
Norsat authorized distributor  
[www.esatcom.com](http://www.esatcom.com)

Tel  
718.276.0800

Email  
[sales@esatcom.com](mailto:sales@esatcom.com)

