



ELMTBKU040H-AN-

E

ELEMENT 40W Ku-Band MINIBUC

Input Frequency: 12.75 - 13.25 GHz

Input Connector: N-Connector

M&C Function: Ethernet



KEY SPECIFICATIONS

| | |
|-------------------------|----------------------|
| Band | Ku-Band |
| External Ref Freq | 10 MHz, -5 to +5 dBm |
| Input Frequency Band 1 | 950 - 1450 MHz |
| LO Frequency 1 | 11.80 GHz |
| Output Frequency Band 1 | 12.75 - 13.25 GHz |
| Output Power Rated | 40W |
| Reference Type | Internal Reference |

RF SPECIFICATIONS

| | |
|----------------------------------|-------------------------------|
| Gain Flatness (over 54mhz) | 1.5 dB |
| Gain Flatness (over Full Band) | 4 dB |
| Gain Flatness (over Temperature) | 4 dB |
| Input VSWR | 2 : 1 max. |
| Linear Gain | 72 dB typ. |
| Output P1db | +46 dBm min. over temperature |
| Output Spurious In Band | -60 dBc |
| Output Spurious Out Of Band | -50 dBc |
| Output VSWR | 2 : 1 max. |
| Phase Noise 100khz Offset Max | -95 dBc/Hz |
| Phase Noise 10khz Offset Max | -85 dBc/Hz |
| Phase Noise 1khz Offset Max | -75 dBc/Hz |

ELECTRICAL SPECIFICATIONS

| | |
|---------------------|-----------|
| Current Consumption | 390W max. |
|---------------------|-----------|





Power Requirements

+36 to +60V DC

INTERFACE SPECIFICATIONS

Frequency Sense

Non-inverted

IF Connector

N-Connector

ENVIRONMENTAL SPECIFICATIONS

Humidity

Up to 100%

IP Rating

IP 55

Temperature Operational

-40 to +55°C

PHYSICAL SPECIFICATIONS

Internal Function

Lock detector shuts off Tx in case of LO unlocked

Product Dimensions (LxWxH)

245 x 125 x 125 mm

Product Weight

4 kg

LOGISTICS SPECIFICATIONS

HS Code

Country of Origin

Ex Works

ECCN Number

Unit Package

8543700000

Made in Korea


Korea

EAR99

290 x 270 x 250 mm |
4.5 kg

HOW TO ORDER

ELMTBKU040HT-EF-E

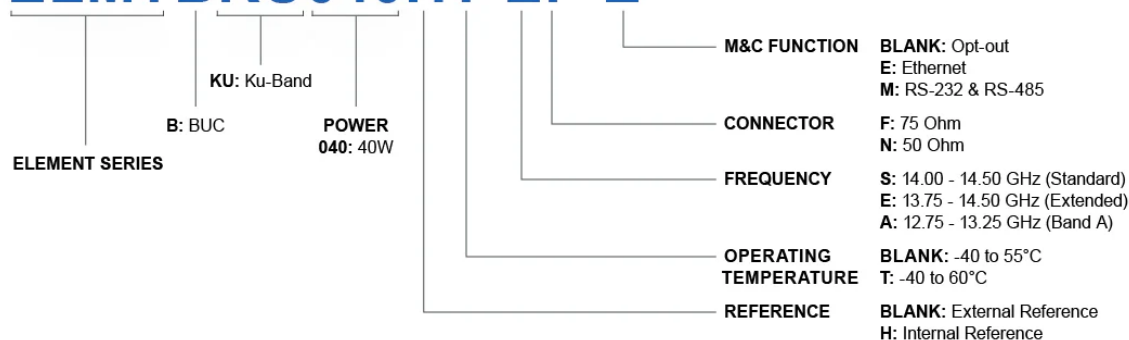


MECHANICAL DIAGRAMS





Norsat
International Inc.

Innovative Communication Solutions

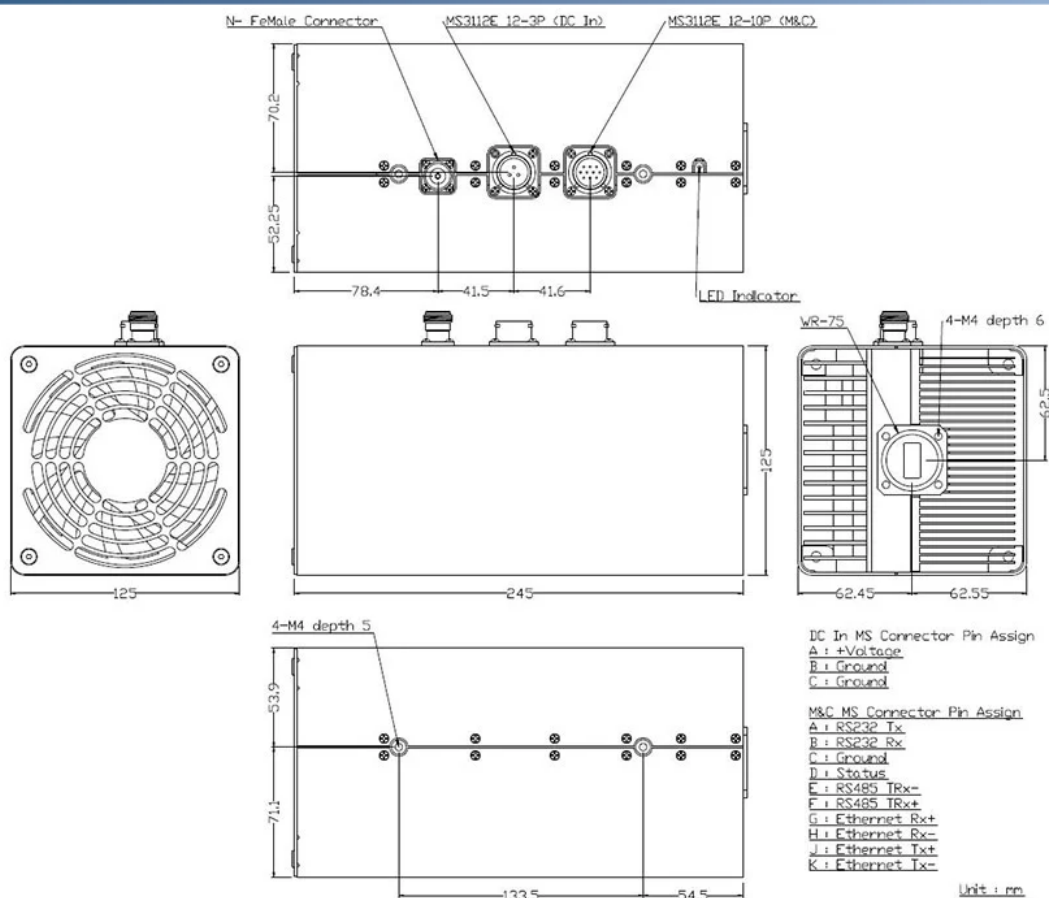

Esatcom Inc
Norsat authorized distributor
www.esatcom.com

Tel
718.276.0800

Email
sales@esatcom.com

