




ELMTBC100T-PF-A
ELEMENT 100W C-Band EXT REF
BUC (High Temperature Range)

Input Frequency: 6.425 - 6.725 GHz
Input Connector: F-Connector
Input Voltage + M&C: 85-265 VAC + No M&C
Function: Function

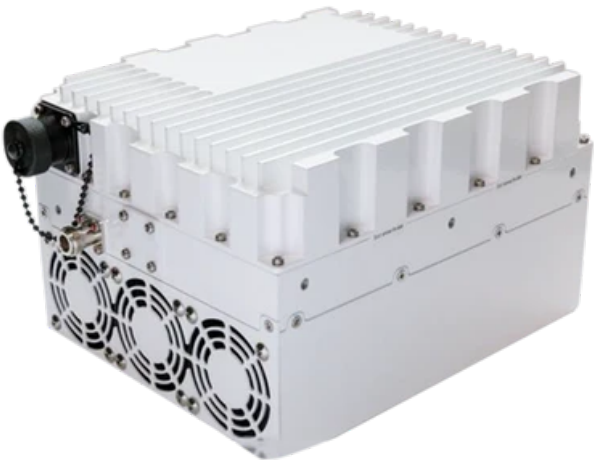

KEY SPECIFICATIONS

Band	C-Band
External Ref Freq	10 MHz, -5 to +5 dBm
Input Frequency Band 1	1150 - 1450 MHz
LO Frequency 1	5.275 GHz
Output Frequency Band 1	6.425 - 6.725 GHz
Output Power Rated	100W
Reference Type	External Reference

RF SPECIFICATIONS

Gain Flatness (over 54mhz)	1.5 dB
Gain Flatness (over Full Band)	4 dB
Gain Flatness (over Temperature)	4 dB
Input VSWR	2 : 1 max.
Linear Gain	80 dB typ.
Output P1db	+50 dBm min. over temperature
Output Spurious In Band	-60 dBc
Output Spurious Out Of Band	-50 dBc
Output VSWR	2 : 1 max.
Phase Noise 100khz Offset Max	-95 dBc/Hz
Phase Noise 10khz Offset Max	-140 dBc/Hz max.
Phase Noise 1khz Offset Max	-135 dBc/Hz max.





ELECTRICAL SPECIFICATIONS

Current Consumption	650W max.
Power Requirements	+85 to +265V AC

INTERFACE SPECIFICATIONS

Frequency Sense	Non-inverted
IF Connector	F-Connector

ENVIRONMENTAL SPECIFICATIONS

Humidity	Up to 100%
IP Rating	IP 54
Temperature Operational	-40 to +60°C
Temperature Storage	-40 to +75°C

PHYSICAL SPECIFICATIONS

Internal Function	Lock detector shuts off Tx in case of LO unlocked
Product Dimensions (LxWxH)	235 x 190 x 145 mm
Product Weight	7.5 kg (+1.0 kg mounting jig)

LOGISTICS SPECIFICATIONS

HS Code	Country of Origin	Ex Works	ECCN Number	Unit Package
8543700000	Made in Korea	Korea	EAR99	290 x 270 x 250 mm 8.5 kg

HOW TO ORDER

ELMTBC100HT-SF-AE

ELEMENT SERIES	C: C-Band	B: BUC	POWER 100: 100W	M&C FUNCTION	BLANK: Opt-out E: Ethernet M: RS-232 & RS-485
				INPUT VOLTAGE	A: AC Power Option D: DC Power Option
				CONNECTOR	F: 75 Ohm N: 50 Ohm
				FREQUENCY	S: 5.850 - 6.425 GHz (Standard) P: 6.425 - 6.725 GHz (Palapa) I: 6.725 - 7.025 GHz (Insat) W: 5.850 - 6.725 GHz (Wide)
				OPERATING TEMPERATURE	BLANK: -40 to 55°C T: -40 to 60°C
				REFERENCE	BLANK: External Reference H: Internal Reference


MECHANICAL DIAGRAMS





Norsat
International Inc.

Innovative Communication Solutions

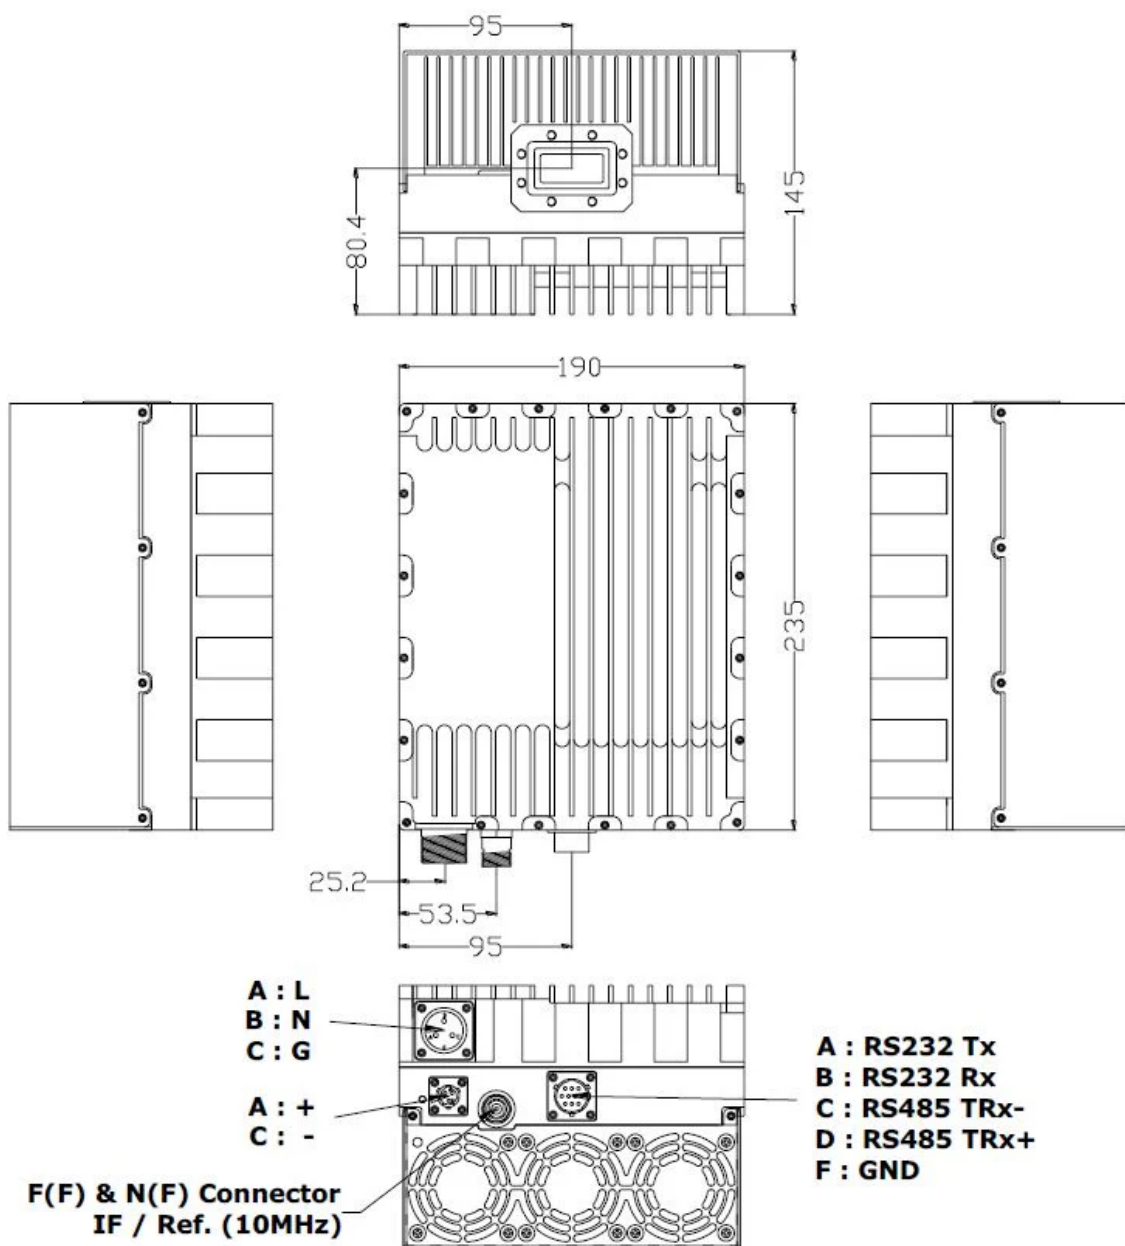

Esatcom Inc
Norsat authorized distributor
www.esatcom.com

Tel
718.276.0800

Email
sales@esatcom.com

