

# ELMTBC080T-IN-A

## ELEMENT 80W C-Band EXT REF BUC (High Temperature Range)

**Input Frequency:** 6.725 - 7.025 GHz

**Input Connector:** N-Connector

**Input Voltage + M&C:** 85-265 VAC + No M&C

**Function:** Function



### KEY SPECIFICATIONS

|                         |                      |
|-------------------------|----------------------|
| Band                    | C-Band               |
| External Ref Freq       | 10 MHz, -5 to +5 dBm |
| Input Frequency Band 1  | 975 - 1275 MHz       |
| LO Frequency 1          | 5.75 GHz             |
| Output Frequency Band 1 | 6.725 - 7.025 GHz    |
| Output Power Rated      | 80W                  |
| Reference Type          | External Reference   |

### RF SPECIFICATIONS

|                                  |                               |
|----------------------------------|-------------------------------|
| Gain Flatness (over 54mhz)       | 1.5 dB                        |
| Gain Flatness (over Full Band)   | 4 dB                          |
| Gain Flatness (over Temperature) | 4 dB                          |
| Input VSWR                       | 2 : 1 max.                    |
| Linear Gain                      | 80 dB typ.                    |
| Output P1db                      | +49 dBm min. over temperature |
| Output Spurious In Band          | -60 dBc                       |
| Output Spurious Out Of Band      | -50 dBc                       |
| Output VSWR                      | 2 : 1 max.                    |
| Phase Noise 100khz Offset Max    | -95 dBc/Hz                    |
| Phase Noise 10khz Offset Max     | -140 dBc/Hz max.              |
| Phase Noise 1khz Offset Max      | -135 dBc/Hz max.              |



### ELECTRICAL SPECIFICATIONS

|                     |                 |
|---------------------|-----------------|
| Current Consumption | 650W max.       |
| Power Requirements  | +85 to +265V AC |

### INTERFACE SPECIFICATIONS

|                 |              |
|-----------------|--------------|
| Frequency Sense | Non-inverted |
| IF Connector    | N-Connector  |

### ENVIRONMENTAL SPECIFICATIONS

|                         |              |
|-------------------------|--------------|
| Humidity                | Up to 100%   |
| IP Rating               | IP 54        |
| Temperature Operational | -40 to +60°C |
| Temperature Storage     | -40 to +75°C |

### PHYSICAL SPECIFICATIONS

|                            |                                                   |
|----------------------------|---------------------------------------------------|
| Internal Function          | Lock detector shuts off Tx in case of LO unlocked |
| Product Dimensions (LxWxH) | 235 x 190 x 145 mm                                |
| Product Weight             | 8.5 kg                                            |

### LOGISTICS SPECIFICATIONS

| HS Code    | Country of Origin | Ex Works | ECCN Number | Unit Package                   |
|------------|-------------------|----------|-------------|--------------------------------|
| 8543700000 | Made in Korea     | Korea    | EAR99       | 290 x 270 x 250 mm  <br>8.5 kg |

### HOW TO ORDER

## ELMTBC080HT-SF-AE

|                       |                  |               |                       |                              |                                                                                                                                                             |
|-----------------------|------------------|---------------|-----------------------|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>ELEMENT SERIES</b> | <b>C: C-Band</b> | <b>B: BUC</b> | <b>POWER 080: 80W</b> | <b>M&amp;C FUNCTION</b>      | <b>BLANK:</b> Opt-out<br><b>E:</b> Ethernet<br><b>M:</b> RS-232 & RS-485                                                                                    |
|                       |                  |               |                       | <b>INPUT VOLTAGE</b>         | <b>A:</b> AC Power Option<br><b>D:</b> DC Power Option                                                                                                      |
|                       |                  |               |                       | <b>CONNECTOR</b>             | <b>F:</b> 75 Ohm<br><b>N:</b> 50 Ohm                                                                                                                        |
|                       |                  |               |                       | <b>FREQUENCY</b>             | <b>S:</b> 5.850 - 6.425 GHz (Standard)<br><b>P:</b> 6.425 - 6.725 GHz (Palapa)<br><b>I:</b> 6.725 - 7.025 GHz (Insat)<br><b>W:</b> 5.850 - 6.725 GHz (Wide) |
|                       |                  |               |                       | <b>OPERATING TEMPERATURE</b> | <b>BLANK:</b> -40 to 55°C<br><b>T:</b> -40 to 60°C                                                                                                          |
|                       |                  |               |                       | <b>REFERENCE</b>             | <b>BLANK:</b> External Reference<br><b>H:</b> Internal Reference                                                                                            |


### MECHANICAL DIAGRAMS





**Norsat**  
International Inc.

Innovative Communication Solutions

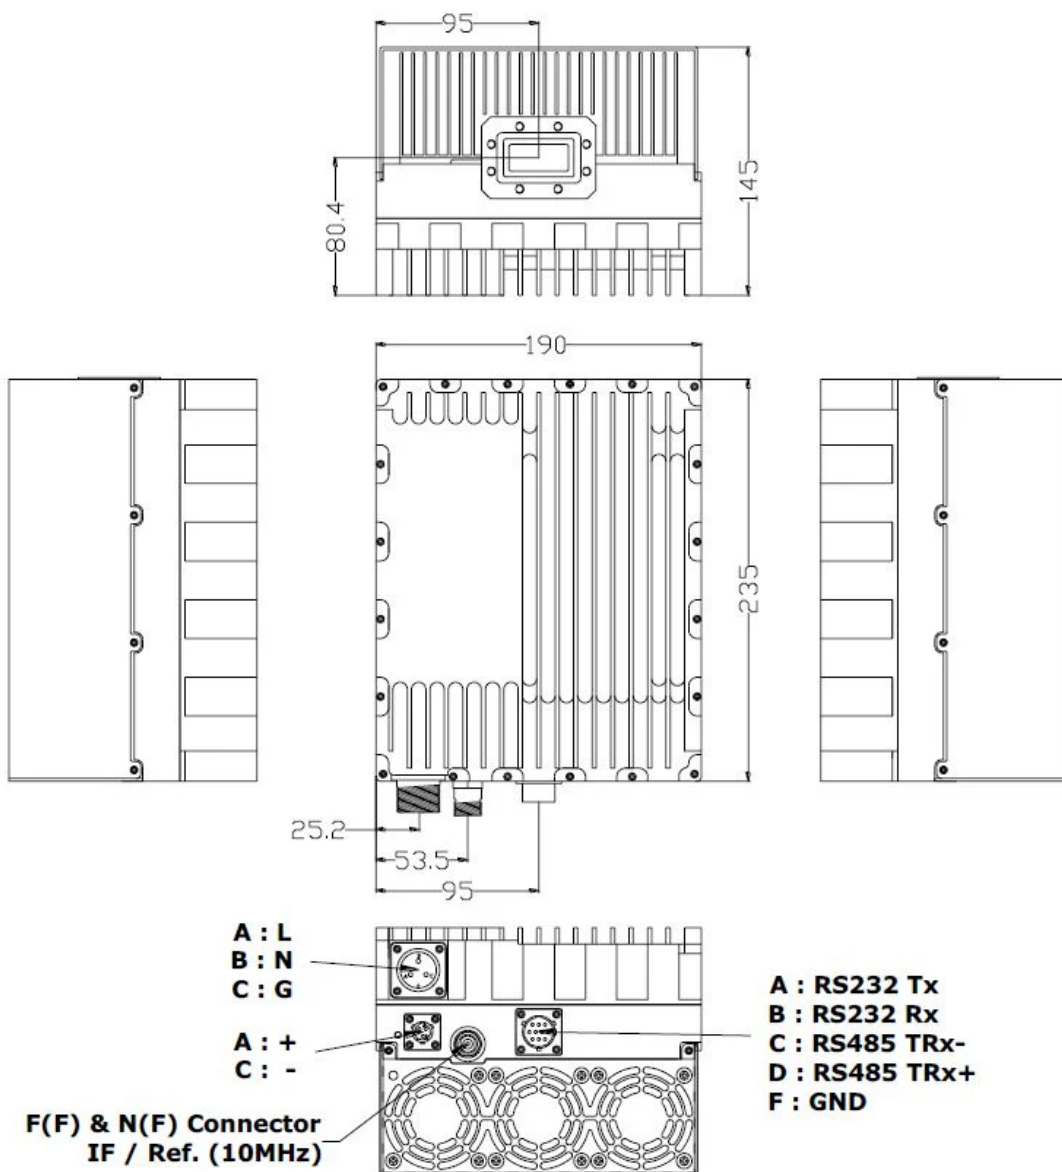

Esatcom Inc  
Norsat authorized distributor  
[www.esatcom.com](http://www.esatcom.com)

Tel  
718.276.0800

Email  
[sales@esatcom.com](mailto:sales@esatcom.com)

