

Innovative Communication Solutions

ELMTBC050T-SF-AE

ELEMENT 50W C-Band EXT BUC (High

Temperature Range)

Input Frequency: S: 5.850 - 6.425 GHz Input Connector: F-Connector Input Voltage + M&C Function: 85-265 VAC + Ethernet



KEY SPECIFICATIONS

Band	C-Band		
External Ref Freq	10 MHz, -5 to +5 dBm		
Input Frequency Band 1	950 - 1525 MHz		
LO Frequency 1	4.9 GHz		
Output Frequency Band 1	5.850 - 6.425 GHz		
Output Power Rated	50W		
Reference Type	External Reference		

RF SPECIFICATIONS

Gain Flatness (over 54mhz)	1.5 dB		
Gain Flatness (over Full Band)	4 dB		
Gain Flatness (over Temperature)	4 dB		
Input VSWR	2 : 1 max.		
Linear Gain	73 dB typ.		
Output P1db	+47 dBm min. over temperature		
Output Spurious In Band	-60 dBc		
Output Spurious Out Of Band	-50 dBc		
Output VSWR	2 : 1 max.		
Phase Noise 100khz Offset Max	-95 dBc/Hz		
Phase Noise 10khz Offset Max	-140 dBc/Hz max.		
Phase Noise 1khz Offset Max	-135 dBc/Hz max.		



CE



ELECTRICAL SPECIFICATIONS

Innovative Communication Solutions


Current Consumption	310WAC max.
Power Requirements	+85 to +265V AC
INTERFACE SPECIFICATIONS	
Frequency Sense	Non-inverted
IF Connector	F-Connector
ENVIRONMENTAL SPECIFICATIONS	
Humidity	Up to 100%
IP Rating	IP 54
Temperature Operational	-40 to +60°C
Temperature Storage	-40 to +75°C
PHYSICAL SPECIFICATIONS	

Internal Function	Lock detector shuts off Tx in case of LO unlocked	
Product Dimensions (LxWxH)	220 x 195 x 183 mm	
Product Weight	7.0 kg	

LOGISTICS SPECIFICATIONS


HS Code	Country of Origin	Ex Works	ECCN Number	Unit Package
8543700000	Made in Korea	Korea	EAR99	290 x 270 x 250 mm 8.5 kg

HOW TO ORDER

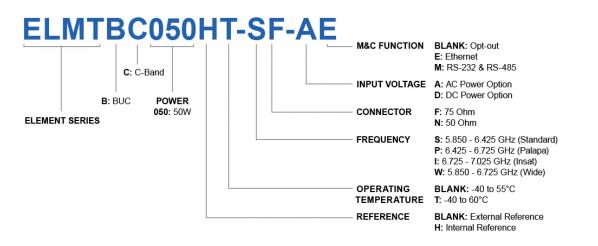

MECHANICAL DIAGRAMS



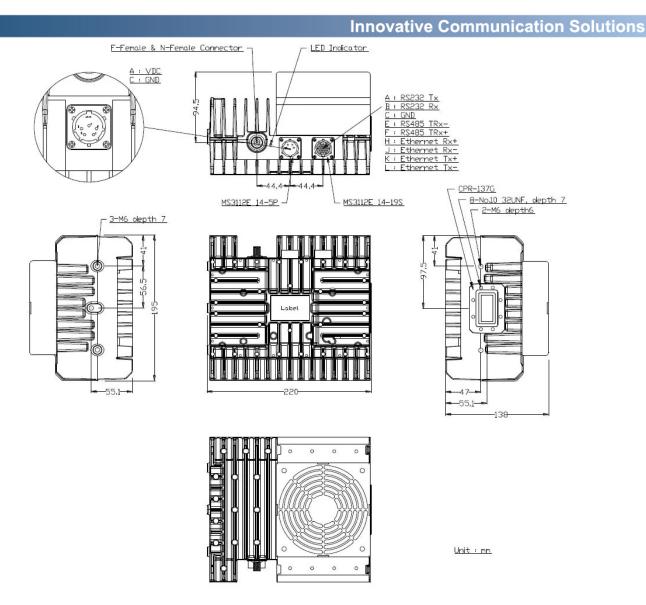



Revision A




Innovative Communication Solutions







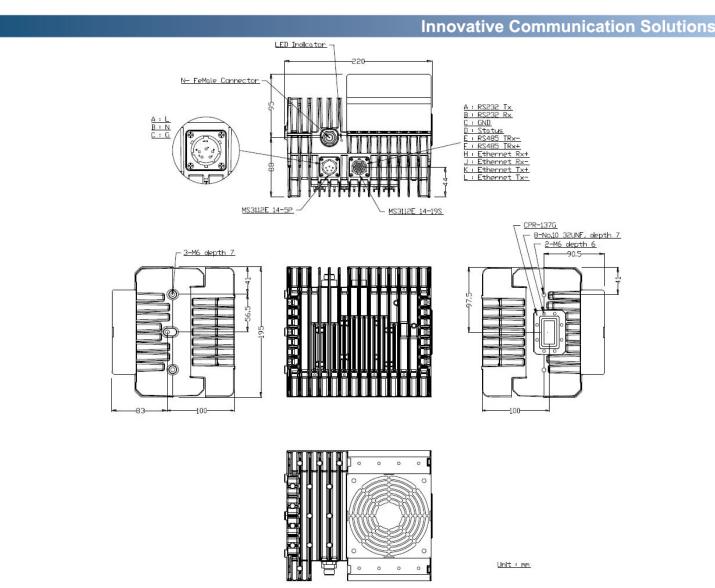



Esatcom Inc Norsat authorized distributor www.esatcom.com Tel 718.276.0800 Email sales@esatcom.com