


Ka System 18.20-20.20 GHz Dual

Key features



HF cables and DC cable included

- Auto LO ref Ext. 10 MHz, fallback to Internal ref
- High P1dB and IP3
- Excellent Phase noise meets all profiles of DVB-S2X.
- Customized LO as option
- Alarm and Monitoring & Control as option




Description

The Ka-Band Dual Systems provides coverage of the Ka receive band. The system consists of Ka LNA Wideband with waveguide isolator, Ka BDC's with waveguide isolators and matched HF cables. Excellent Phase Noise to support all profiles of DVB-S2X services.


Options include customized LO, customized frequency ranges, customized gain, separate DC power input and separate input for the external 10 MHz reference. As an option the SMW M&C interface provides possibility to daisychain several units in one Modbus RTU RS485 network for the optional Alarm and Monitoring & Control functionality.

BDC connector (standard)



Connector A (standard)
Type: N-f, (option F-f or SMA-f)
Functions: L-Band out, DC in, External 10 MHz in

BDC connectors (optional)




Connector B (optional)
Type: M8 female, 4 pin, A-coded
Functions: Alarm and M&C

Connector B (optional)



- 1 = Alarm open collector (max. 200 mA) or optionally DC input.
- 2 = A pos+ RS485
- 3 = B neg- RS485
- 4 = Common (GND)
- 5 = Shield

Connector C (optional)
Type: SMA-f only
Functions: Ext. 10 MHz in and/or DC input

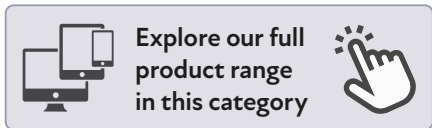

Ka System 18.20-20.20 GHz Dual

Technical specifications

	MODEL	18.20 - 20.20 GHz
INPUT	Input frequency	BDC 1: 18.20-19.20 GHz BDC 2: 19.20-20.20 GHz
	LO frequency	BDC 1: 17.25 GHz BDC 2: 18.25 GHz
	Input LNA	Waveguide WR 42 / R 220. Flange PBR 220.
	Input BDC	SMA female 50Ω
	DC Input BDC	+12 to +24 V through output connector or separate SMA connector (optional), power consumption 5W typ.
	DC input LNA	+12 to +24 V / 110 mA typ. Supplied through separate SMA connector via included DC cable, mated from BDC # 1
	Input VSWR LNA	1.35:1 max. with Isolator (included)
	INTERNAL	LO ref.
External LO ref.		Sine wave, Level -10 to +10 dBm. Supplied through output connector.
LO Leakage		-60 dBm max. @ RF input
Gain		60 dB typ. (55dB min.)
Flatness		±0.4 dB within 30 MHz, ±2 dB max. over each band
Noise figure		1.8 dB / 149 K typ.
Group Delay		±1 ns max.
Phase Noise		-35 dBc @ 10 Hz -65 dBc @ 100 Hz -80 dBc @ 1 kHz -85 dBc @ 10 kHz -95 dBc @ 100 kHz -112 dBc @ >1 MHz typ.
Image Rejection		30 dB min.
OUTPUT	IF output	950-1950 MHz, (950-2250 MHz optional)
	Output P1dB	+ 15 dBm
	Output IP3	+ 25 dBm
	Output VSWR BDC	1.7:1 typ.
	Output connector LNA	SMA-type 50Ω
	Output Connector BDC	N-type 50Ω , SMA-type 50Ω or F-type 75Ω
GENERAL	Alarm (option)	Sum alarm, set via M&C to alarm in any combination of: LNA failure, Total current, LO lock (Ext/Int/n/a), signal power high/low, Supply voltage low. Open collector 3.3 to 28 V, max. 200 mA (pull-up 10 k Ohm at host side), pin 1 in M8 connector.
	M & C (option)	Via MODBUS RTU RS485 electrical interface, see document Monitoring and Control technical interface for details. NOTE! Mates with M8 male connector/Cable, use only shielded CAT 5 cables
	System power consumption	13 W max.
	MTBF	MTBF as per MIL-HDBK-217F Notice 2: Environmental Condition GF (Ground Fixed): >690000 hours, Environmental Condition AIC (Airborne, Inhabited, Cargo): >360000 hour, Quality level: Commercial, Temperature used for MTBF calculation: +35°C Ambient
	Dimensions LNA	103 x 63 x 34 mm, including isolator
	Dimensions BDC	178 x 80 x 46 mm (F- & SMA-connector) 184 x 80 x 46 mm (N-connector) (for drawing, see www.smw.se)
	Weight LNA	160 including isolator
	Weight BDC	399 g (F- & SMA-connector) 418 g (N-connector)
OPTIONS	Temperature range	Storage and operating: -40 to +80°C, -40 to +176°F
	Options	- Separate SMA connector on BDC for DC input or Ext. 10 MHz reference - Alarm and Monitoring & Control - Customized gain - Customized LO - Extended IF


Ka System 18.20-20.20 GHz Dual

Example and wiring diagram

Example Ka-Band Dual System configurations					
P/N (x = connector type F, N or SMA)	Frequency range (GHz)	BDC	LO	Ka-band (GHz)	L-band (MHz)
55720x-V02 Auto LO ref. Ext. 10 MHz/Int.±2.5 ppm	18.20 - 20.20	1	17.20	18.20-19.20	1000-2000
		2	18.20	19.20-20.20	1000-2000
55721x-V02 Auto LO ref. Ext. 10 MHz/Int.±2.5 ppm	18.20 - 20.20	1	17.25	18.20-19.20	950-1950
		2	18.25	19.20-20.20	950-1950


NOTE P/N: x = "0" for F connector, "5" for N connector and "8" for SMA connector

Ka Dual Band System

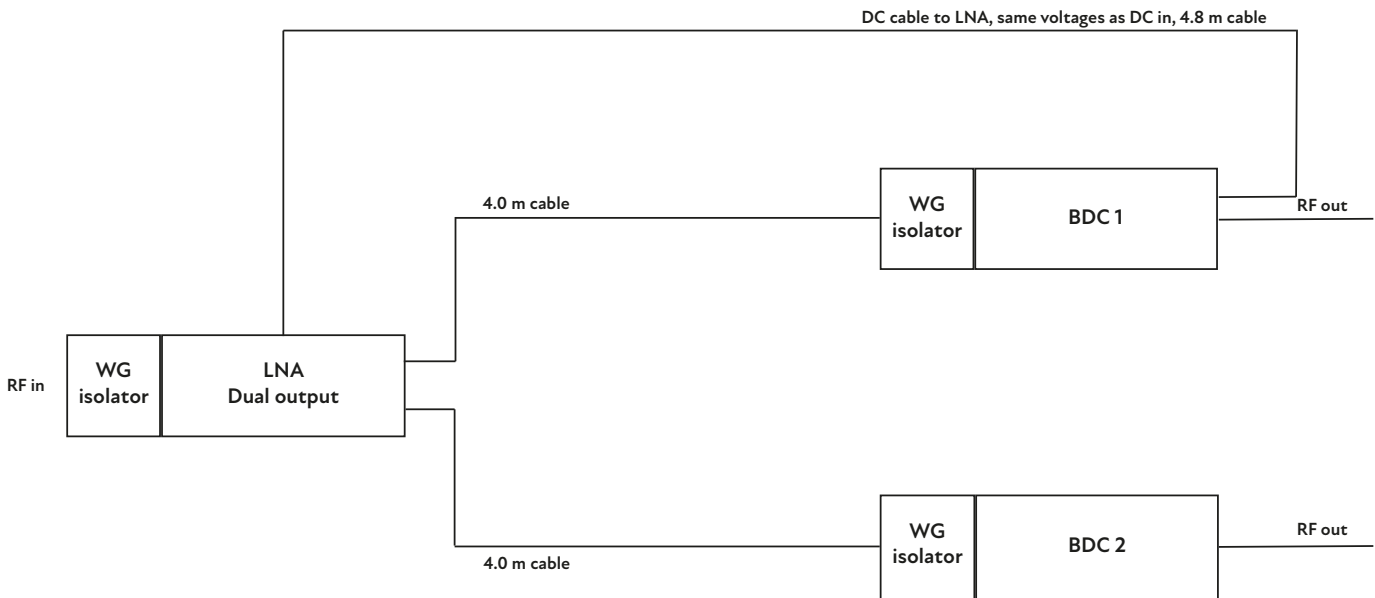

Ka System 18.20-20.20 GHz Dual

Technical Drawing

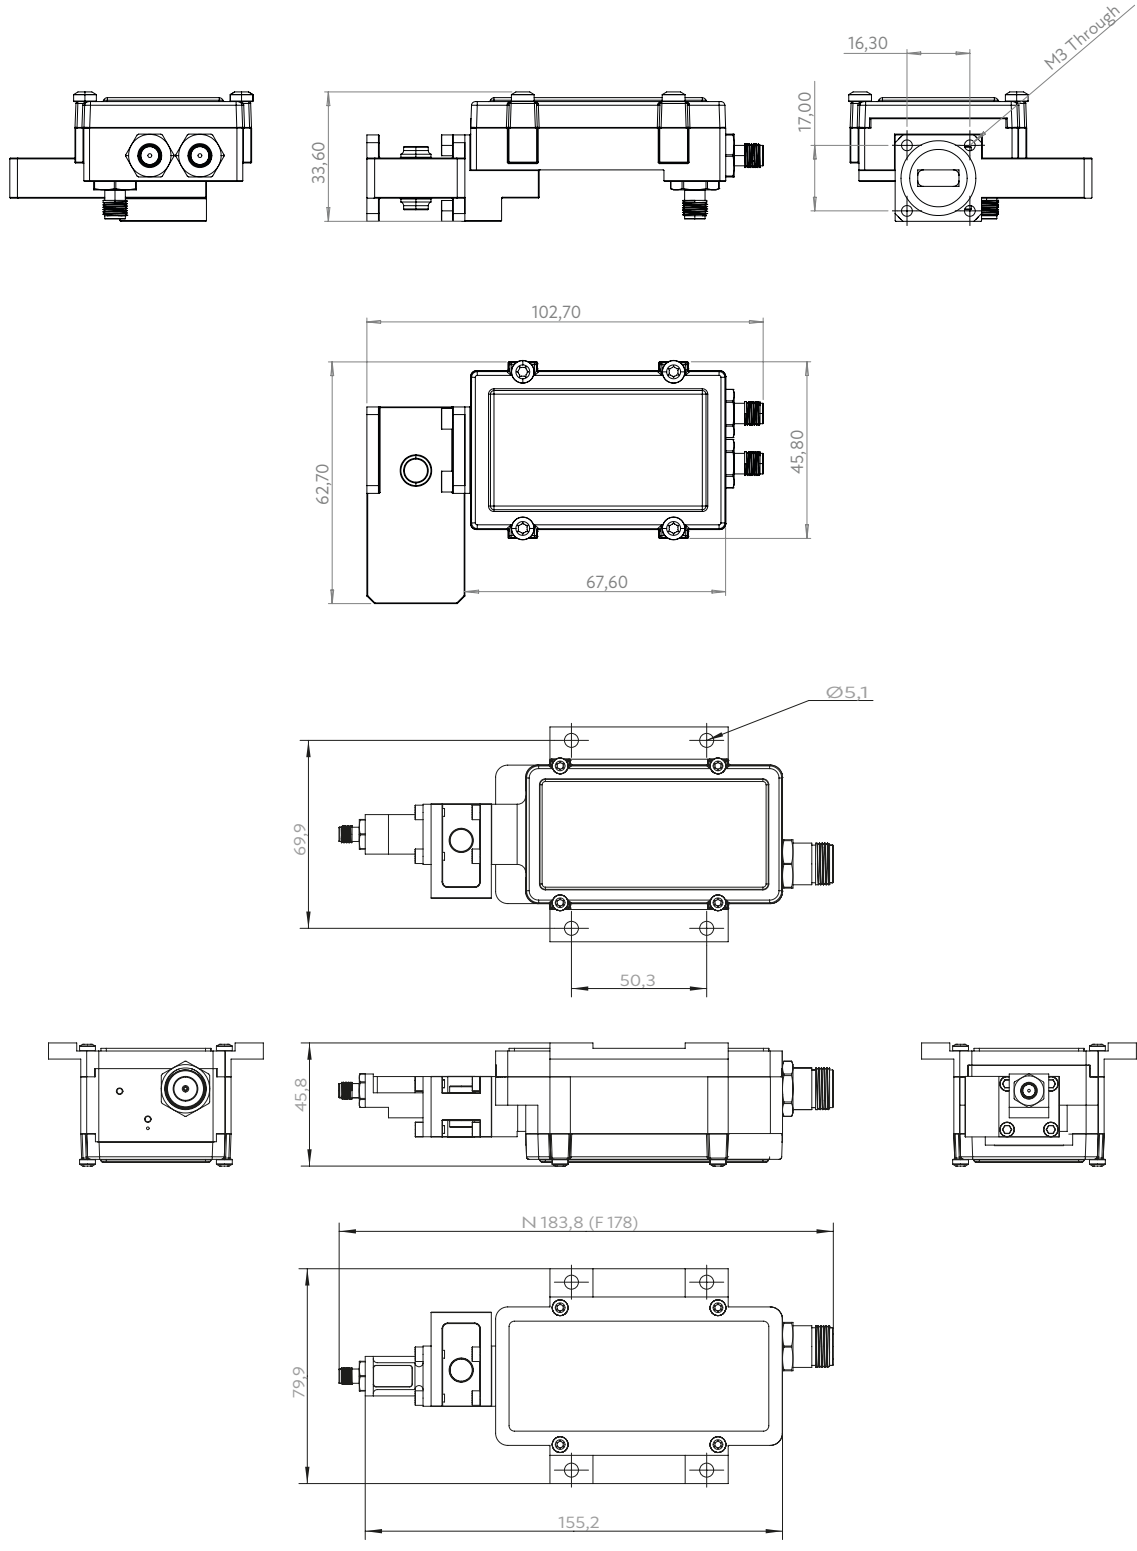

Professional Satcom Frequency Converters & Components. All products are fully CE and RoHS compliant and every unit includes full documentation of performance tests and quality control. Please contact sales@smw.se to configure or customize the unit to your needs. Visit smw.se or scan QR code to see our full product range and request a quote.

