

400W KL-Band Hubmount BUC/ SSPB/ SSPA

Second Generation GaN Technology

SSPA	AWMAg-KL	4200-G series
SSPB (BUC)	SSPBMg-KL	4200-G series

SapphireBlu™ UltraLinear™

400W Low Ku-Band (12.75 – 13.25 GHz)



Features

- Output power of 400W in a single package
- Very High linearity
- Redundant ready with no external controller
- Full M&C capability via RS232, RS485 or Ethernet port
- Built-in Forward precision powering metering
- Output RF calibrated Sample Port
- Redundant Systems shipped fully tested
- Infinite VSWR protection with automatic high reflected power shutdown
- Weatherproof construction
- CE marking

Overview

Based on GaN technology the new G-Series Low Ku-Band BUCs provide high power density in a compact size. Combined with the traditional Advantech Wireless features, these new series of BUCs provide the ultimate in performance and convenience.


1+1/1:1 Phase Combined /Redundant System

Options

- 1:1 or 1:2 Redundant configuration
- 1:1 Redundant 400W or 1+1 Phase Combined 800W
- L-Band input (SSPB/BUC operation)
- Internal/External reference with auto-sensing
- Ethernet port

Accessories

- Mounting kits
- Remote M&C panel with optional SNMP
- Handheld terminal
- Flexible and rigid waveguides
- Mounting frames

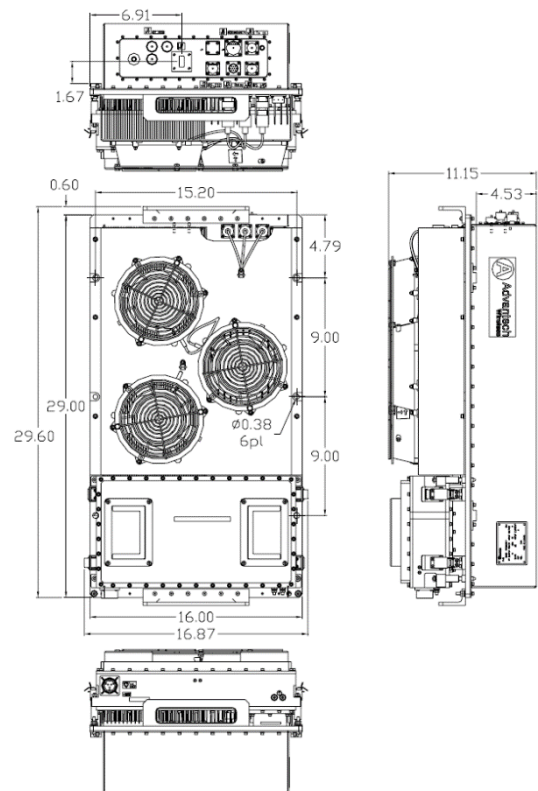



400W KL-Band Hubmount BUC/ SSPB/ SSPA Second Generation GaN Technology

General Specifications

Operating Frequency	Low Ku-Band: 12.75 – 13.25 GHz		
L-Band input (BUC)	Ku-band IF: 950 – 1450 MHz		
Output power	400W		
P_{SAT} (typ.)	+56.0 dBm		
P_{1dB}	+55.0 dBm		
P_{LINEAR}	+53.0 dBm		
	P_{LINEAR} is the power at which the IMD=-25 dBc for two CW signals 5 MHz apart versus total power, and the spectral regrowth is <-30 dBc @ 1.0 x symbol rate for a single QPSK/OQPSK/8PSK signal.		
Optional Phase Combined System	P_{SAT} (typ.) = +58.5 dBm	P_{1dB} = +57.5 dBm	P_{LINEAR} = +55.5 dBm
Gain	SSPA SSPB (BUC) Phase Combined System	66 ± 3 dB 76 ± 3 dB 70 ± 3 dB	
Gain adjustment range	20 dB in 0.1 dB steps		
Gain flatness over full band	SSPA 2dB p-p max	SSPB (BUC) 4 dB p-p max	
Gain slope over 40 MHz	± 0.3 dB max	SSPB (BUC) ± 0.5 dB max	
Gain variation over temperature	± 1.5 dB max		
Input Impedance and VSWR	50 Ω	SSPA 1.3:1	SSPB (BUC) 1.4:1 System 1.5:1
Output VSWR	1.25:1		
Noise power density	-75 dBm/Hz in Transmit Band, -145 dBm/Hz in Receive Band (10.95-11.7 GHz)		
Spurious at P_{LINEAR}	-65 dBc max		
Harmonics	-60 dBc @ P_{LINEAR}		
AM/PM conversion	<1.0°/dB P_{LINEAR}		
Third order intermod (two tones)	-25 dBc two signal 5 MHz apart at P_{LINEAR}		
Group delay	Ripple	1 nsec p-p max over any 40 MHz band	
Residual AM Noise	0 – 10 kHz	-45 dBc	
	10 kHz – 500 kHz	-20 (1.25 + log F) dBc F = Frequency in kHz	
	500 kHz – 1 MHz	-80 dBc	
Local Oscillator freq.	11.8 GHz		
Internal Reference frequency (optional)	10 MHz	Aging/day	±2 × 10 ⁻¹⁰
		Aging/year	±5 × 10 ⁻⁸
		Stability	±2 × 10 ⁻⁸ over temp range
Phase Noise	-65 dBc/Hz at 100Hz	-85 dBc/Hz at 10 kHz	
	-75 dBc/Hz at 1kHz	-100 dBc/Hz at 100 kHz	
External Reference	10 MHz		
Frequency phase noise (max)	-120 dBc/Hz at 10Hz	-155 dBc/Hz at 10 kHz	
	-135 dBc/Hz at 100Hz	-160 dBc/Hz at 100 kHz	
	-150 dBc/Hz at 1000Hz		

Weight & Dimensions

Unit Dimensions (L x W x H)	29.6" x 16.87" x 11.5" (752 x 428.5 x 292 mm)			
1+1/1:1 Red/ Phase Combined (L x W x H)	52" x 42" x 30" (1321 x 1067 x 762 mm)			
Weight	Single Unit = 119 lbs (54 Kg) 1+1/1:1 Phase Combined Redundant System = 606 lbs (275 Kg) with shipping crate			
AC input voltage	180 – 264 VAC (47-63 Hz)			
Power consumption (nominal)	Single unit = 2400W at P_{LINEAR} ; 3200W at P_{SAT}			
Interfaces	Input (RF or L-Band)	N type female	AC line	MS3102 type
	Output Sample Port	N type female	RF output	WR75 Cover
	RS485	MS3112 type	Ethernet	RJ45 Weatherized
Environmental	Temperature	Operating -30°C to +55°C Storage -50°C to +85°C		
	Humidity	100% condensing		
	Altitude	10,000' AMSL, derated by 2 °C/1000' from AMSL		

Ref.: PB-SSPBMg-2G-KL-400W-18145

NORTH AMERICA

USA
info.usa@advantechwireless.com

CANADA
Info.canada@advantechwireless.com

EUROPE

UNITED KINGDOM
info.uk@advantechwireless.com

RUSSIA & CIS
info.russia@advantechwireless.com

SOUTH AMERICA

info.latam@advantechwireless.com

BRAZIL
info.brazil@advantechwireless.com

ASIA

info.asia@advantechwireless.com

INDIA
info.india@advantechwireless.com