



THIS DRAWING IS A SOURCE CONTROL DRAWING AND IS PROPRIETARY TO MICROWAVE FILTER CO., INC. AND  
MAY NOT BE DUPLICATED OR DISTRIBUTED WITHOUT WRITTEN PERMISSION OF MICROWAVE FILTER CO., INC.  
THIS DRAWING ALSO DESCRIBES TRADE SECRETS AND IS THE EXCLUSIVE PROPERTY OF MICROWAVE FILTER CO., INC

REVISION			
LTR	ECN	DATE	APPR'D
A	4772	8/15	PMB

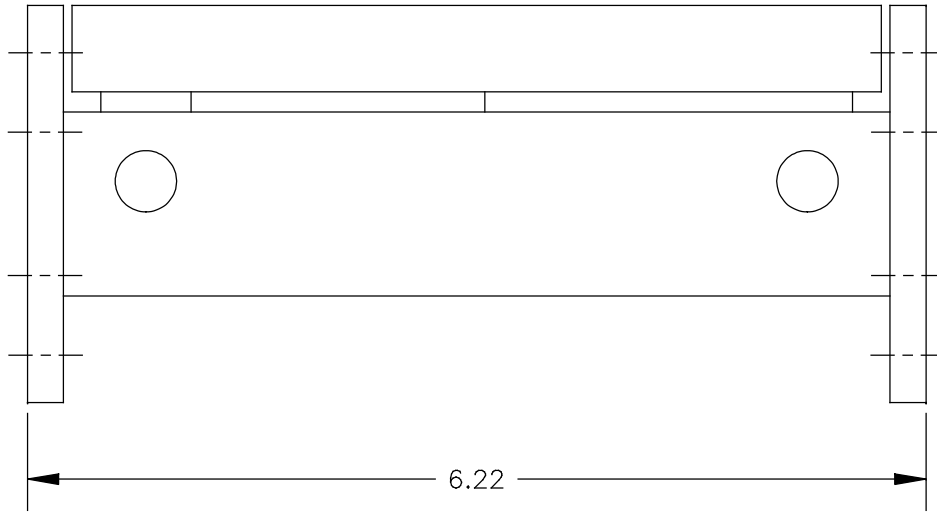

← INPUT

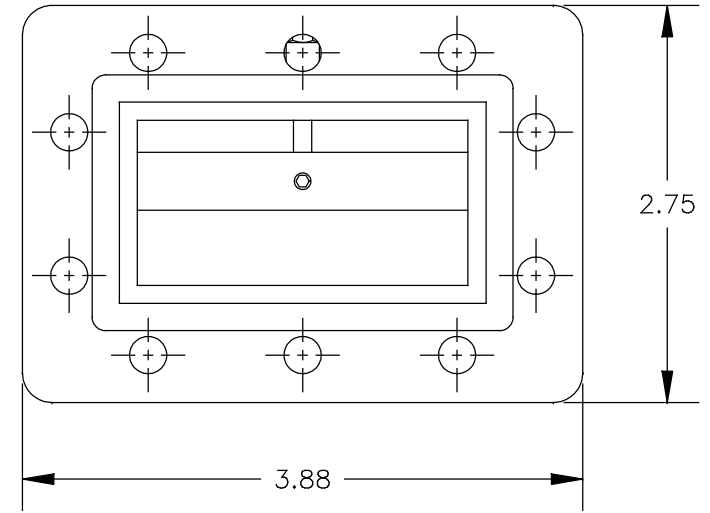

SPECIFICATIONS

PASSBAND: 3900 – 4200 MHz  
PASSBAND INSERTION LOSS: 0.75 dB TYP @ CENTER FREQUENCY (F<sub>0</sub>)  
1.25 dB TYP @ BAND EDGES  
PASSBAND VSWR: 1.5:1 TYP  
REJECTION: 35 dB TYP, 30 dB MIN. @ 3845 & 4255 MHz  
FLANGES: CPR-229 W/SUPPLIED HALF GASKET/  
GROOVED FLANGE (INPUT SIDE)  
FLAT FLANGE (OUTPUT SIDE)

UNLESS SPECIFIED  
ALL TOLERANCES ±.030

ENVELOPE DRAWING

<b>MFC</b> MICROWAVE FILTER CO. INC. 6749 KINNE ST. E. SYRACUSE, N.Y. 13057		FSCM27834	
DATE	4/08	TITLE	
DWN BY	PMB	BANDPASS FILTER	
ENGINEER	E.L.	DRAWING NO.	REV
		7893D-3900/4200	A