
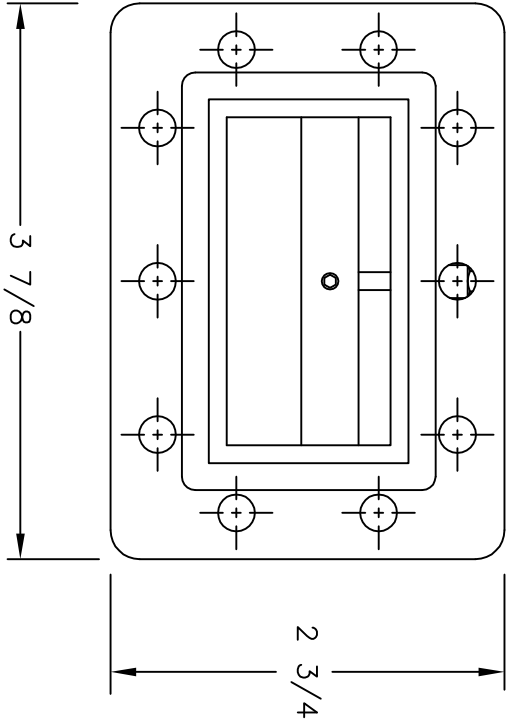


THIS DRAWING IS A SOURCE CONTROL DRAWING AND IS PROPRIETARY TO MICROWAVE FILTER CO., INC. AND
MAY NOT BE DUPLICATED OR DISTRIBUTED WITHOUT WRITTEN PERMISSION OF MICROWAVE FILTER CO., INC.
THIS DRAWING ALSO DESCRIBES TRADE SECRETS AND IS THE EXCLUSIVE PROPERTY OF MICROWAVE FILTER CO., INC

REVISION			
LTR	ECN	DATE	APP'D

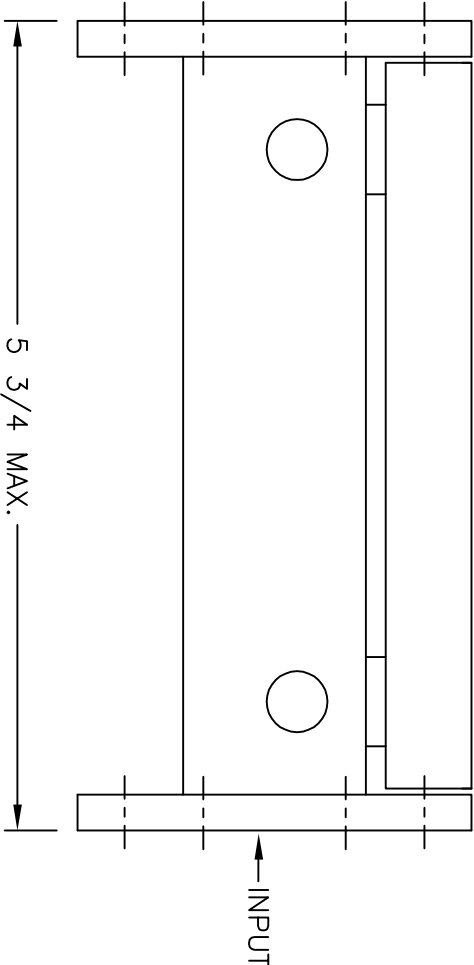

SPECIFICATIONS

PASSBAND:	3.665 – 4.165 GHz.
INSERTION LOSS:	0.4 dB TYP. @ F _o
	0.5 dB ROLL OFF @ BAND EDGE
VSWR:	1.5:1 TYP.
RETURN LOSS:	>14 dB TYP.
GROUP DELAY:	LESS THAN 8 ns TYP
REJECTION:	FREQUENCY:
25 dB MIN.	3.615, 4.215 GHz
60 dB MIN.	3.515, 4.315 GHz
70 dB MIN.	3.465, 4.365 GHz
WEIGHT:	2.5 lbs
FLANGES:	CPR229G (INPUT) CPR229F (OUTPUT)

* HALF GASKET SUPPLIED W/ EACH MODEL

ENVELOPE DRAWING

MFC MICROWAVE FILTER CO. INC. 6749 KINNE ST. E. SYRACUSE, N.Y. 13657		FSCM27834	
DATE 7/23/08		TITLE	
DWN BY MW		BANDPASS FILTER	
ENGINEER		DRAWING NO.	
		7893D-3665/4165	
		REV	
		-	