




THIS DRAWING IS A SOURCE CONTROL DRAWING AND IS PROPRIETARY TO MICROWAVE FILTER CO., INC. AND
MAY NOT BE DUPLICATED OR DISTRIBUTED WITHOUT WRITTEN PERMISSION OF MICROWAVE FILTER CO., INC.
THIS DRAWING ALSO DESCRIBES TRADE SECRETS AND IS THE EXCLUSIVE PROPERTY OF MICROWAVE FILTER CO., INC

REVISION

LTR	ECN	DATE	APPR'D

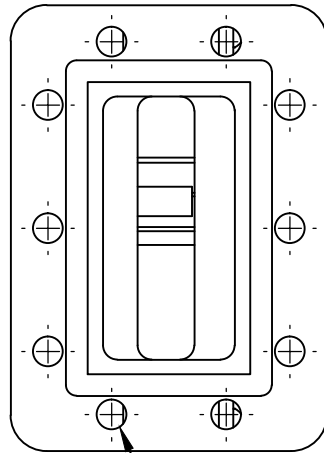

.257 DIA THRU
(10) BOTH FLANGES

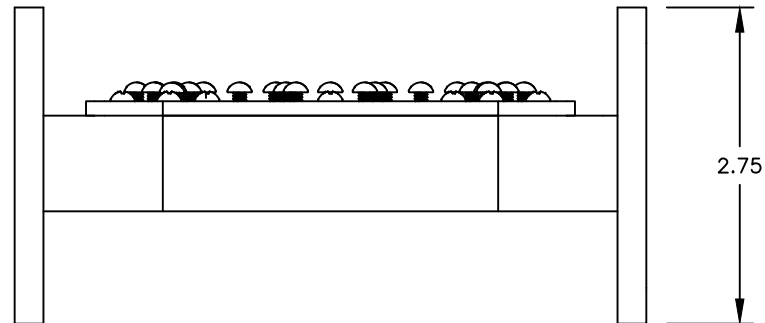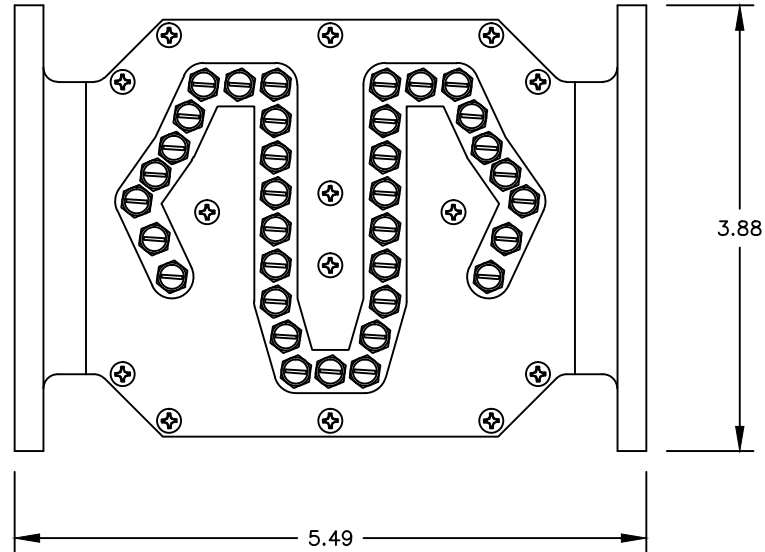

SPECIFICATIONS

PASSBAND:	3700-4200 MHz
INSERTION LOSS:	0.5 dB MAX
PASSBAND RETURN LOSS:	15.6 dB MIN
REJECTION:	25 dB MIN @ 3650 & 4250 MHz
	60 dB MIN @ 3550 & 4350 MHz
	70 dB MIN @ 3500 & 4400 MHz
	70 dB MIN @ 5800 & 6500 MHz
GROUP DELAY VARIATION:	<1.0 nS WITHIN +/-0.5 MHz.
OPERATING TEMP RANGE:	-40 DEG C TO +40 DEG C
FLANGES:	CPR-229G (INPUT) CPR-229F (OUTPUT)
ENVIRONMENT:	OUTDOOR USE (IP67)

UNLESS SPECIFIED
ALL TOLERANCES $\pm$.030

ENVELOPE DRAWING

MFC MICROWAVE FILTER CO. INC. 6743 KINNE ST. E. SYRACUSE, N.Y. 13057		FSCM27834	
DATE	10/23	TITLE C-BAND FILTER	
DWN BY	PMB		
ENGINEER	J.S.	DRAWING NO.	REV
		21000B 3700-4200	-