


THIS DRAWING IS A SOURCE CONTROL DRAWING AND IS PROPRIETARY TO MICROWAVE FILTER CO., INC. AND MAY NOT BE DUPLICATED OR DISTRIBUTED WITHOUT WRITTEN PERMISSION OF MICROWAVE FILTER CO., INC. THIS DRAWING ALSO DESCRIBES TRADE SECRETS AND IS THE EXCLUSIVE PROPERTY OF MICROWAVE FILTER CO., INC

REVISION			
LTR	ECN	DATE	APPR'D

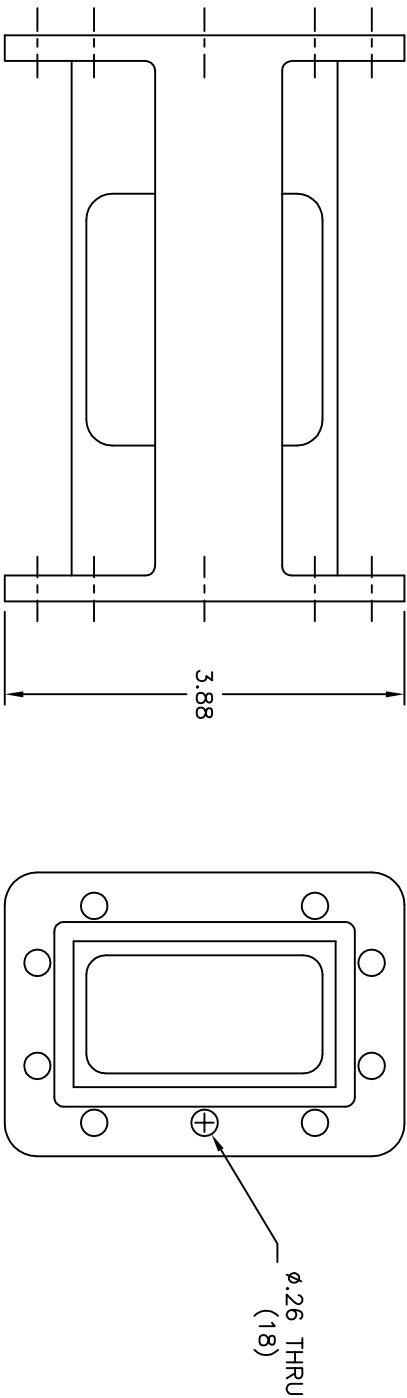

SPECIFICATIONS

PASSBAND: 3680–4180 MHz
INSERTION LOSS: 0.3 dB APPROX. @ F_0
VSWR: 1.44:1 TYP
GROUP DELAY VARIATION: 8 ns MAX

REJECTION		FREQUENCY
45 dB MIN		3630, 4230 MHz
60 dB TYP		3530, 4330 MHz
70 dB TYP		3480, 4380 MHz
80 dB TYP		5825–7250 MHz
50 dB TYP		7250–7750 MHz

FLANGES: CPR229G (INPUT)
CPR229F (OUTPUT)
HALF GASKET SUPPLIED WITH EACH UNIT
WEIGHT: 1.125 lbs APPROX.

ENVELOPE DRAWING

UNLESS SPECIFIED
ALL TOLERANCES $\pm .060$

MFC MICROWAVE FILTER CO. INC. 6743 KINNE ST. E. SYRACUSE, N.Y. 13057		FSCM27834	
DATE 12/23/13	TITLE BANDPASS FILTER		
DWN BY MW	DRAWING NO. 13961WE-3680/4180		
ENGINEER B.P.	REV —		