



Super Extended C-Band Radar Reject Filter



Model 16506

This ultra-low loss filter was designed specifically to suppress Aircraft Radionavigation located right above the Super Extended receive band.



Specifications:

Passband:	3.4 - 4.2 GHz
Insertion Loss:	0.05 dB Typ at 3.4-4.1 GHz 0.25 dB Typ at 4.1-4.2 GHz
VSWR:	1.2:1 Max
Pressurization:	Tested to 1.0 PSIG
Reject Band:	4.24 - 4.35 GHz
Rejection:	25 dB Min
Flanges:	CPR229F
Weight:	5.3 lbs (2.39 Kg)
Dimensions:	18.0" x 3.8" x 5.4" (457mm x 96mm x 137mm)
Finish:	Gloss White Lacquer

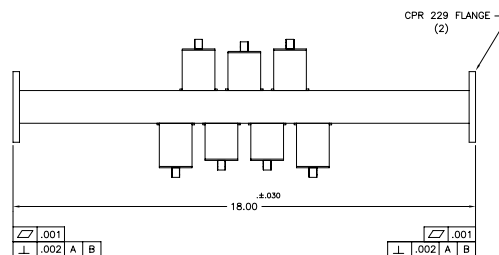

MICROWAVE FILTER CO., INC.



Esatcom Inc.

www.esatcom.com

Tel:

718.799.0084

Email:

sales@esatcom.com