


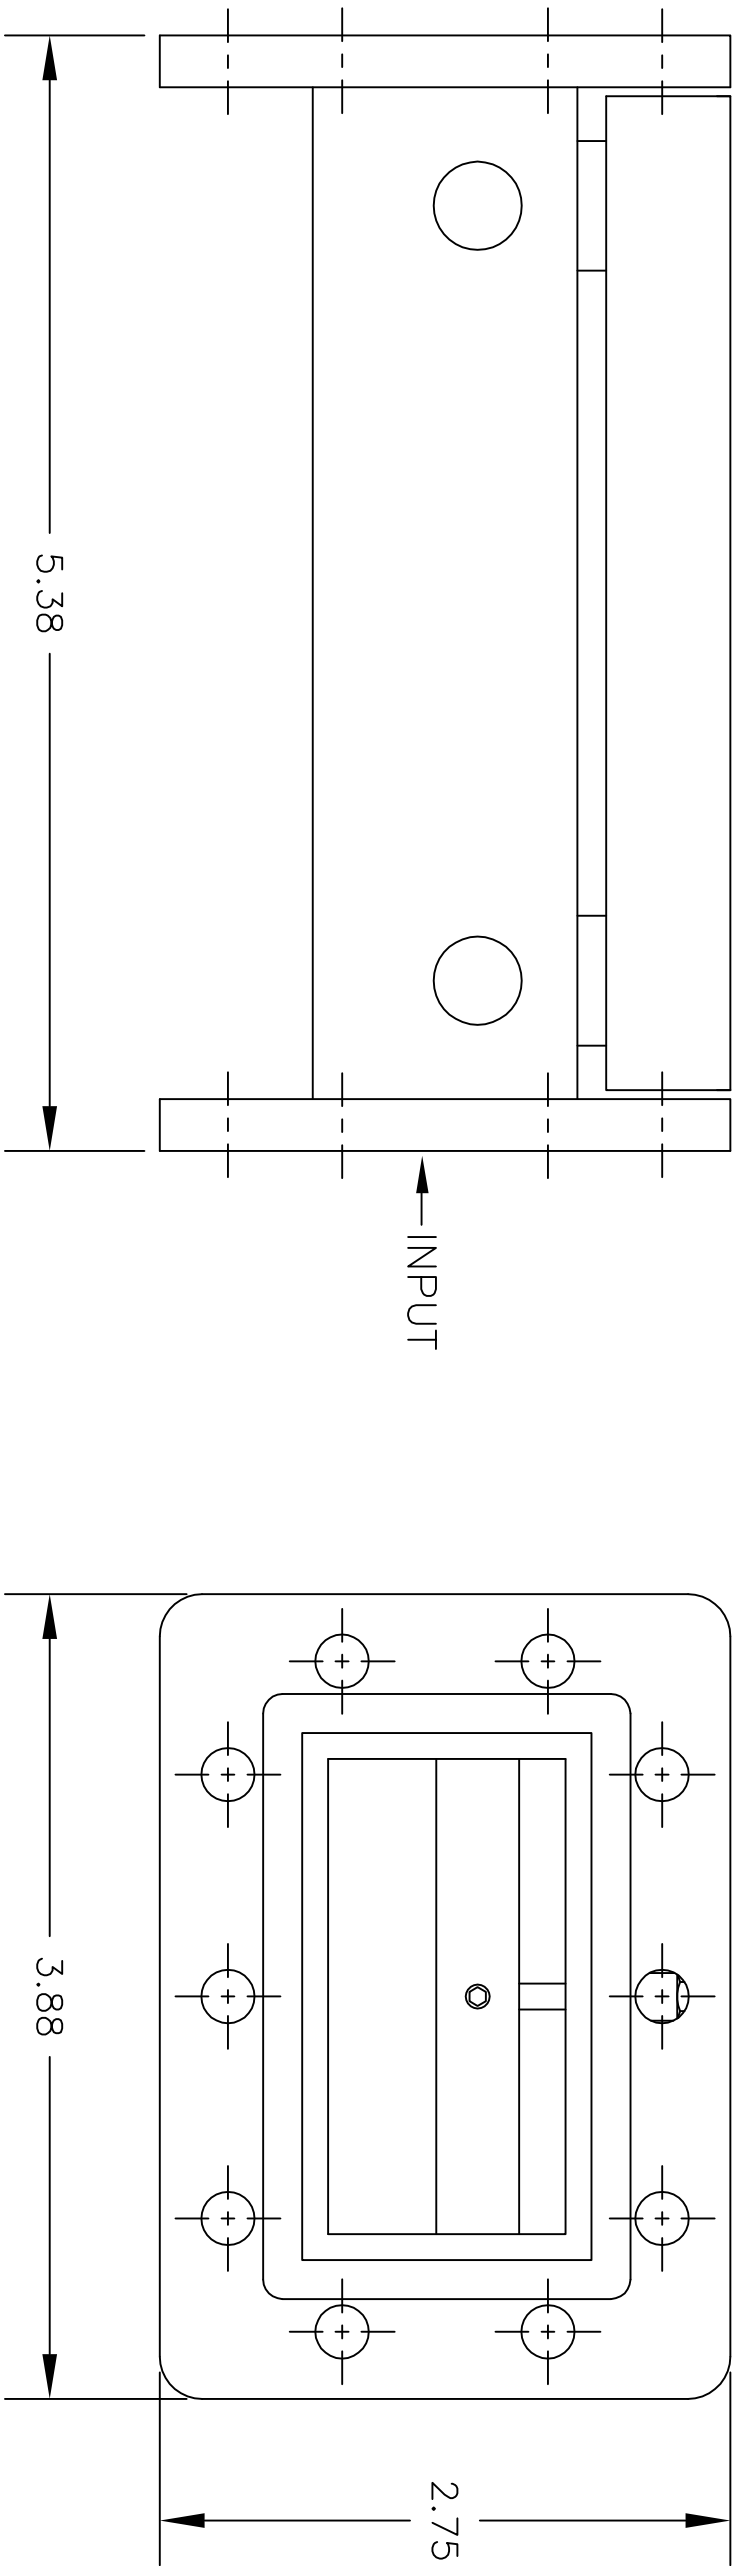

SPECIFICATIONS

PASSBAND: 3.60 – 4.20 GHz.
PASSBAND LOSS: 1.25 dB MAX., 0.9 dB TYP.
RETURN LOSS: 17.0 dB MIN.
REJECTION: 25 dB MIN. @ 3.525 GHz
25 dB MIN. @ 4.285 GHz
FLANGES: CPR–229 W/SUPPLIED HALF GASKET/
GROOVED FLANGE (INPUT SIDE)
FLAT FLANGE (OUTPUT SIDE)

UNLESS SPECIFIED
ALL TOLERANCES ±.030

ENVELOPE DRAWING

 MICROWAVE FILTER CO. INC. 6749 KINNE ST. E. SYRACUSE, N.Y. 13057		FSCM27834	
DATE	10/06	TITLE	
DWN BY	PMB	BANDPASS FILTER	
ENGINEER	JS	SIZE	DRAWING NO.
		B	7894D–3600/4200
			REV
			–