

Innovative Communication Solutions

9200HIABF

9200 Dual-Band Ka-Band PLL LNB

Frequency: AB: 18.2 - 19.2 | 19.2 - 20.2 GHz

W/G Isolator: Yes

Output Connector: F: 75 Ohm









KEY SPECIFICATIONS

Band Ka-Band 18.20 - 19.20 GHz Input Frequency Band 1 Input Frequency Band 2 19.20 - 20.20 GHz LO Frequency 1 17.25 GHz 18.25 GHz LO Frequency 2 ±25 kHz LO Stability LO Type PLL **Noise Figure Max** 1.6 dB **Noise Figure Typ** 1.5 dB **Number Of Onboard Los** Dual-Band Output Frequency Band 1 950 - 1950 MHz **Output Frequency Band 2** 950 - 1950 MHz

RF SPECIFICATIONS

Control Signal 1 13V / No Tone **Control Signal 2** 18V / No Tone **Conversion Gain Max** 65 dB 55 dB **Conversion Gain Min** 60 dB **Conversion Gain Typ** Gain Flatness (over Full Band) ≤ 5 dB p-p Input VSWR 1.5:1 max. Output P1db + 5 dBm min. **Output VSWR** 2.3:1 max.





Innovative Communication Solutions

Phase Noise 1khz Offset Max-70 dBc/HzPhase Noise 10khz Offset Max-78 dBc/HzPhase Noise 100khz Offset Max-95 dBc/Hz

ELECTRICAL SPECIFICATIONS

Current Consumption 450 mA max.

Power Requirements +12 to +24V DC

INTERFACE SPECIFICATIONS

IF Connector F-Connector
Isolator With Isolator

RF Input Connector WR-42 waveguide grooved

ENVIRONMENTAL SPECIFICATIONS

IP Rating IP 67

Temperature Operational -40°C to $+60^{\circ}\text{C}$ Temperature Storage $-40 \text{ to } +80^{\circ}\text{C}$

PHYSICAL SPECIFICATIONS

Product Height 45 mm

Product Length 141.8 mm

Product Weight 0.465 kg


Product Width 60 mm

LOGISTICS SPECIFICATIONS

HS Code Country of Origin Ex Works ECCN Number Unit Package

8517690000 Made in the Republic of Korea EAR99 118 mm x 60 mm x 45 mm | 0.4 kg

HOW TO ORDER

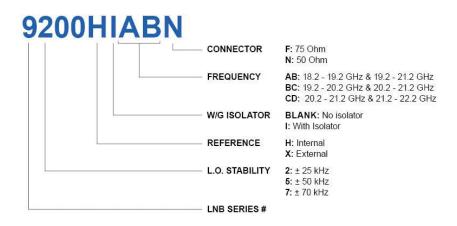

MECHANICAL DIAGRAMS





Innovative Communication Solutions

