

## **Innovative Communication Solutions**

Norsat

9000LC

Ka-Band LNB

LO Freq: 19.25 GHz Stability:+/- 2.0 MHz

Gain: 60 dB(Typ)

NF: 1.5dB DC Input: +12 to +24V

# 9000LIBN

# 9000 Single Band Ka-Band DRO LNB

Frequency: B: 19.2 - 20.2 GHz

W/G Isolator: Yes

Output Connector: N: 50 Ohm

Norsat's Low Noise Blocks (LNBs) provide signal reception for satellite communications around the world. We offer premium performance and reliability in the smallest form factor possible. All of our standard Ka-Band LNBs are backed by a 3 year warranty and nearly forty years of experience as the industry's leading provider of high performance LNBs. 9000L Series.



LO Type

Input VSWR







Band Ka-Band

Input Frequency Band 1 19.20 - 20.20 GHz

DRO

1.5:1 max.

LO Frequency 1 18.25 GHz

LO Stability ±2 MHz

Noise Figure Max 1.2 dB

Noise Figure Typ 1.5 dB

Number Of Onboard Los Single-Band

Output Frequency Band 1 950 - 1950 MHz

#### **RF SPECIFICATIONS**

Conversion Gain Max 65 dB

**Conversion Gain Min** 55 dB

Conversion Gain Typ 60 dB

**Gain Flatness (over Full Band)**  $\leq 5 \text{ dB p-p max}.$ 

**Gain Flatness Ripple**  $\leq 5 \text{ dB p-p}$ 

Output P1db + 3 dBm min.

Output VSWR 2.5 : 1 max.

Phase Noise 100khz Offset Max -95 dBc/Hz

# **ELECTRICAL SPECIFICATIONS**

Power Requirements +12 to +24V DC

# **INTERFACE SPECIFICATIONS**







# **Innovative Communication Solutions**

IF Connector

Isolator

N-Connector

With Isolator

RF Input Connector WR-42 waveguide grooved

# **ENVIRONMENTAL SPECIFICATIONS**

Temperature Operational-30°C to +60°CTemperature Storage-40 to +80°C


## **PHYSICAL SPECIFICATIONS**

Product Height42 mmProduct Length111 mmProduct Weight0.3 kgProduct Width42 mm

#### LOGISTICS SPECIFICATIONS

HS Code	Country of Origin	Ex Works	ECCN Number	Unit Package
8517690000	Made in the Republic of Korea	Richmond, BC, Canada	EAR99	140 mm x 50 mm x 50 mm   0.3 kg

## **HOW TO ORDER**

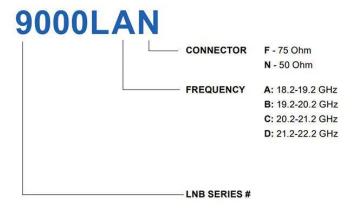

## **MECHANICAL DIAGRAMS**





# **Innovative Communication Solutions**

