

Innovative Communication Solutions

Norsat

9000LC

Ka-Band LNB

LO Freq: 19.25 GHz Stability:+/- 2.0 MHz

Gain: 60 dB(Typ)

NF: 1.5dB DC Input: +12 to +24V

9000LIAF

9000 Single Band Ka-Band DRO LNB

Frequency: A: 18.2 - 19.2 GHz

W/G Isolator: Yes

Output Connector: F: 75 Ohm

Norsat's Low Noise Blocks (LNBs) provide signal reception for satellite communications around the world. We offer premium performance and reliability in the smallest form factor possible. All of our standard Ka-Band LNBs are backed by a 3 year warranty and nearly forty years of experience as the industry's leading provider of high performance LNBs. 9000L Series.



LO Type

Output VSWR





KEY SPECIFICATIONS

Band Ka-Band

Input Frequency Band 1 18.20 - 19.20 GHz

DRO

1.5:1 max.

2.5:1 max.

LO Frequency 1 17.25 GHz

LO Stability ±2 MHz

Noise Figure Max 1.2 dB

Noise Figure Typ 1.5 dB

Number Of Onboard Los Single-Band

950 - 1950 MHz Output Frequency Band 1

RF SPECIFICATIONS

Conversion Gain Max 65 dB

55 dB **Conversion Gain Min**

Conversion Gain Typ 60 dB

Gain Flatness (over Full Band) \leq 5 dB p-p max.

Gain Flatness Ripple ≤ 5 dB p-p

Input VSWR

Output P1db + 3 dBm min.

Phase Noise 100khz Offset Max -95 dBc/Hz

ELECTRICAL SPECIFICATIONS

Power Requirements +12 to +24V DC

INTERFACE SPECIFICATIONS







Innovative Communication Solutions

IF Connector F-Connector

Isolator With Isolator

RF Input Connector WR-42 waveguide grooved

ENVIRONMENTAL SPECIFICATIONS

Temperature Operational-30°C to +60°CTemperature Storage-40 to +80°C


PHYSICAL SPECIFICATIONS

Product Height42 mmProduct Length111 mmProduct Weight0.3 kgProduct Width42 mm

LOGISTICS SPECIFICATIONS

HS Code	Country of Origin	Ex Works	ECCN Number	Unit Package
8517690000	Made in the Republic of Korea	Richmond, BC, Canada	EAR99	140 mm x 50 mm x 50 mm 0.3 kg

HOW TO ORDER

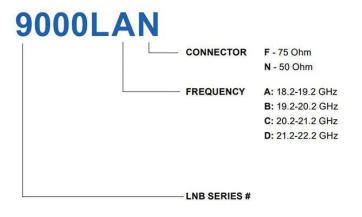

MECHANICAL DIAGRAMS



Innovative Communication Solutions

