



9000LIAN

9000 Single Band Ka-Band DRO LNB

Frequency: A: 18.2 - 19.2 GHz

W/G Isolator: Yes

Output Connector: N: 50 Ohm

Norsat's Low Noise Blocks (LNBs) provide signal reception for satellite communications around the world. We offer premium performance and reliability in the smallest form factor possible. All of our standard Ka-Band LNBs are backed by a 3 year warranty and nearly forty years of experience as the industry's leading provider of high performance LNBs. 9000L Series.



KEY SPECIFICATIONS

Band	Ka-Band
Input Frequency Band 1	18.20 - 19.20 GHz
LO Frequency 1	17.25 GHz
LO Stability	±2 MHz
LO Type	DRO
Noise Figure Max	1.2 dB
Noise Figure Typ	1.5 dB
Number Of Onboard Los	Single-Band
Output Frequency Band 1	950 - 1950 MHz

RF SPECIFICATIONS

Conversion Gain Max	65 dB
Conversion Gain Min	55 dB
Conversion Gain Typ	60 dB
Gain Flatness (over Full Band)	≤ 5 dB p-p max.
Gain Flatness Ripple	≤ 5 dB p-p
Input VSWR	1.5 : 1 max.
Output P1db	+ 3 dBm min.
Output VSWR	2.5 : 1 max.
Phase Noise 100khz Offset Max	-95 dBc/Hz

ELECTRICAL SPECIFICATIONS

Power Requirements	+12 to +24V DC
--------------------	----------------

INTERFACE SPECIFICATIONS



Innovative Communication Solutions

IF Connector	N-Connector
Isolator	With Isolator
RF Input Connector	WR-42 waveguide grooved

ENVIRONMENTAL SPECIFICATIONS

Temperature Operational	-30°C to +60°C
Temperature Storage	-40 to +80°C

PHYSICAL SPECIFICATIONS

Product Height	42 mm
Product Length	111 mm
Product Weight	0.3 kg
Product Width	42 mm

LOGISTICS SPECIFICATIONS

HS Code	Country of Origin	Ex Works	ECCN Number	Unit Package
8517690000	Made in the Republic of Korea	Richmond, BC, Canada	EAR99	140 mm x 50 mm x 50 mm 0.3 kg

HOW TO ORDER

9000LAN


CONNECTOR	F - 75 Ohm N - 50 Ohm
FREQUENCY	A: 18.2-19.2 GHz B: 19.2-20.2 GHz C: 20.2-21.2 GHz D: 21.2-22.2 GHz
LNB SERIES #	

MECHANICAL DIAGRAMS



Norsat
International Inc.

Innovative Communication Solutions

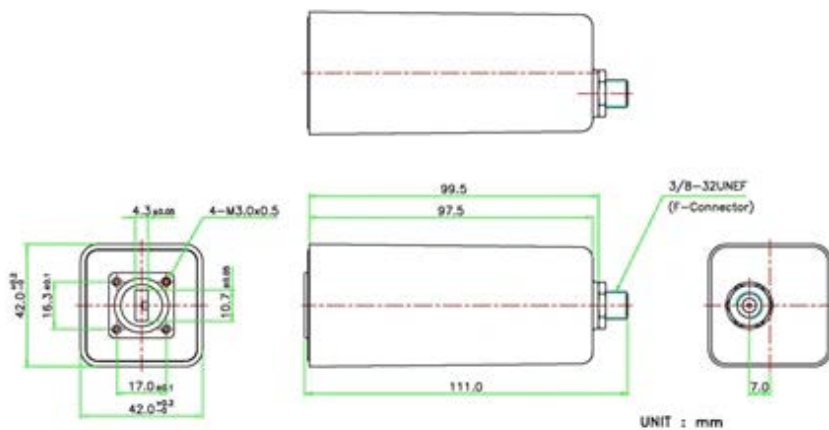

Esatcom Inc
Norsat authorized distributor
www.esatcom.com

Tel
718.799.0084

Email
sales@esatcom.com