

Innovative Communication Solutions

ULC-0-50-LLC

Universal LNB Controller

Reference: 0: No Reference
Connector Type: 50: N-Connector

Control Interface LLC: Line Length Compensation with

Option: Switch





KEY SPECIFICATIONS

Cl Option Logic Levels L: 0 - 0.8 V; H: 2.5 - 7 V (20mA)

Reference Signal None

Tone Amplitude $0.55 \sim 0.9 \text{ vpp}$ Tone Frequency $20 \sim 24 \text{ kHz}$

RF SPECIFICATIONS

Output VSWR 2.0 : 1 max.

ELECTRICAL SPECIFICATIONS

Current Consumption450 mA/24 VOutput Current500 mA maxOutput Voltage 1 $12.5 \sim 13.5 \text{ VDC}$ Output Voltage 2 $17.3 \sim 18.7 \text{ VDC}$ Power Requirements+23 to +25 V DC

INTERFACE SPECIFICATIONS

Connector N-Connector

Control Interface Switch, Cable, Line Length Compensation with switch

RF Input Connector 50 Ohm N Connector

ENVIRONMENTAL SPECIFICATIONS

IP Rating IP 66

Temperature Operational -30°C to +60°C

PHYSICAL SPECIFICATIONS

Product Height30 mmProduct Length130 mmProduct Weight0.66 kg






Innovative Communication Solutions

Product Width 95 mm

LOGISTICS SPECIFICATIONS

ECCN Number HS Code Country of Origin Ex Works **Unit Package** 8517690000 Made in Canada Richmond, BC, Canada EAR99

HOW TO ORDER




Blank: Switch Control only CI: Control Interface Cable LLC: Line Length Compensation with Switch

75: 75 Ohm F connector 50: 50 Ohm N connector 50s: 50 Ohm SMA connector

0: no reference

1: 10 MHz reference 2F, 2N, 2S: 10 MHz injection port, F, N or SMA connector


MECHANICAL DIAGRAMS

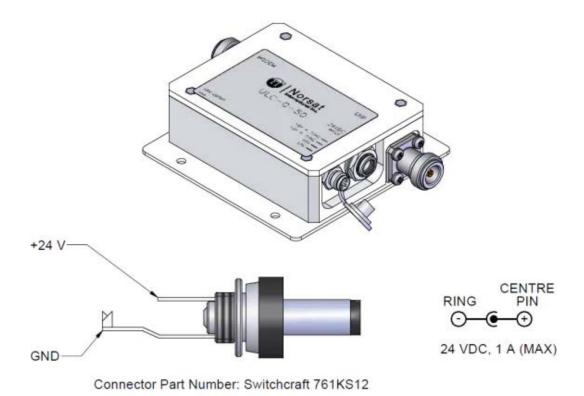



Innovative Communication Solutions

BAND SELECTION



LNB Controller Connector End View Mating Connector Part Number: Binder 79-3382-42-04

22kHz Tone	Voltage	Line Length Compensation	Output
L	L	L	13V
L	Н	L	18V
L	L	Н	14V
L	Н	Н	19V
н	L	L	13V + tone
н	Н	L	18V + tone
н	L	Н	14V + tone
н	н	Н	19V + tone



