

## **Innovative Communication Solutions**

# **ULC-1-75-LLC**

## **Universal LNB Controller**

**Reference:** 1: 10 MHz reference **Connector Type:** 75: F-Connector

Control Interface LLC: Line Length Compensation with

Option: Switch





#### **KEY SPECIFICATIONS**

**CI Option Logic Levels** L: 0 - 0.8 V; H: 2.5 - 7 V (20mA)

Reference Signal10MHz internalTone Amplitude $0.55 \sim 0.9 \text{ vpp}$ Tone Frequency $20 \sim 24 \text{ kHz}$ 

#### **RF SPECIFICATIONS**

Output VSWR 2.0 : 1 max.

#### **ELECTRICAL SPECIFICATIONS**

 Current Consumption
 600 mA/24 V

 Output Current
 500 mA max.

 Output Voltage 1
 12.5 ~ 13.5 VDC

 Output Voltage 2
 17.3 ~ 18.7 VDC

 Power Requirements
 +23 to +25 V DC

#### INTERFACE SPECIFICATIONS

Connector F-Connector

**Control Interface** Switch, Cable, Line Length Compensation with switch

**RF Input Connector** 75 Ohm F Connector

## **ENVIRONMENTAL SPECIFICATIONS**

IP Rating IP 66

Temperature Operational -30°C to +60°C

#### PHYSICAL SPECIFICATIONS

Product Height30 mmProduct Length130 mmProduct Weight0.66 kg






## **Innovative Communication Solutions**

**Product Width** 95 mm

#### LOGISTICS SPECIFICATIONS

HS Code	Country of Origin	Ex Works	ECCN Number	Unit Package
8517690000	Made in Canada	Richmond, BC, Canada	EAR99	1

#### **HOW TO ORDER**




CI: Control Interface Cable LLC: Line Length Compensation with Switch

75: 75 Ohm F connector 50: 50 Ohm N connector 50s: 50 Ohm SMA connector

0: no reference

1: 10 MHz reference 2F, 2N, 2S: 10 MHz injection port, F, N or SMA connector

## **MECHANICAL DIAGRAMS**

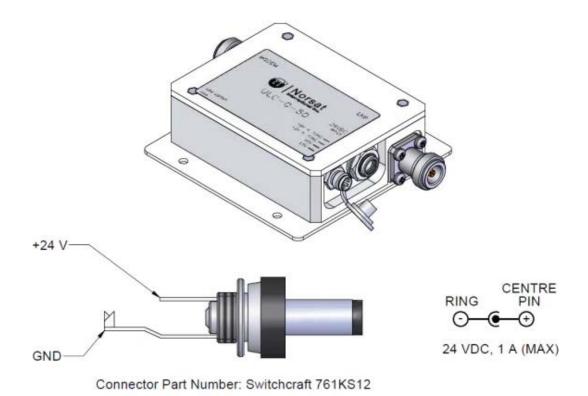






## **Innovative Communication Solutions**

## **BAND SELECTION**

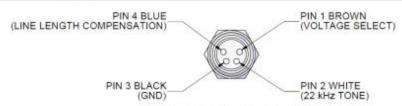

LNB Controller Connector End View Mating Connector Part Number: Binder 79-3382-42-04

22kHz Tone	Voltage	Line Length Compensation	Output
L	L	L	13V
L	Н	L	18V
L	L	Н	14V
L	Н	Н	19V
н	L	L	13V + tone
н	Н	L	18V + tone
н	L	Н	14V + tone
н	н	Н	19V + tone



