

## **Innovative Communication Solutions**

# ULC-2F-50s-CI

## **Universal LNB Controller**

Reference: 2F: 10 MHz injection port (F Connector)

Connector Type: 50s: SMA Connector

Control Interface Option: CI: Control Interface Cable





#### **KEY SPECIFICATIONS**

Cl Option Logic Levels L: 0 - 0.8 V; H: 2.5 - 7 V (20mA)

Reference Signal 10MHz injection port

Tone Amplitude  $0.55 \sim 0.9 \text{ vpp}$ 

Tone Frequency 20 ~ 24 kHz

#### **RF SPECIFICATIONS**

Output VSWR 2.0 : 1 max.

#### **ELECTRICAL SPECIFICATIONS**

Current Consumption600 mA/24 VOutput Current500 mA max.Output Voltage 1 $12.5 \sim 13.5 \text{ VDC}$ Output Voltage 2 $17.3 \sim 18.7 \text{ VDC}$ Power Requirements+23 to +25 V DC

#### INTERFACE SPECIFICATIONS

**Connector** SMA Connector

**Control Interface** Switch, Cable, Line Length Compensation with switch

**RF Input Connector** 50 Ohm SMA Connector

## **ENVIRONMENTAL SPECIFICATIONS**

IP Rating IP 66

Temperature Operational -30°C to +60°C

#### PHYSICAL SPECIFICATIONS

Product Height30 mmProduct Length130 mmProduct Weight0.66 kg






## **Innovative Communication Solutions**

**Product Width** 95 mm

## LOGISTICS SPECIFICATIONS

**ECCN Number HS Code Country of Origin** Ex Works **Unit Package** 8517690000 Made in Canada Richmond, BC, Canada EAR99

#### **HOW TO ORDER**




Blank: Switch Control only CI: Control Interface Cable LLC: Line Length Compensation with Switch

75: 75 Ohm F connector 50: 50 Ohm N connector 50s: 50 Ohm SMA connector

0: no reference

1: 10 MHz reference 2F, 2N, 2S: 10 MHz injection port, F, N or SMA connector


## **MECHANICAL DIAGRAMS**

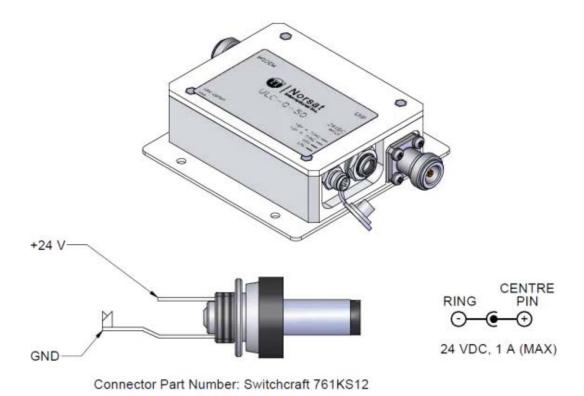



## **Innovative Communication Solutions**

# **BAND SELECTION**



LNB Controller Connector End View Mating Connector Part Number: Binder 79-3382-42-04

22kHz Tone	Voltage	Line Length Compensation	Output
L	Ĺ	L	13V
L	Н	L	18V
L	L	Н	14V
L	Н	Н	19V
н	L	L	13V + tone
н	Н	L	18V + tone
н	L	Н	14V + tone
н	Н	Н	19V + tone



