

# 7200HTBN

## 7000 Triple-Band Ka-Band PLL LNB

**Frequency:** B: 17.70 - 18.70 GHz | 18.70 - 19.70 GHz |  
19.70 - 20.70 GHz

**L.O. Stability:** +/- 25 kHz

**Output Connector:** N: 50 Ohm



## KEY SPECIFICATIONS

<b>Band</b>	Ka-Band
<b>Input Frequency Band 1</b>	17.70 - 18.70 GHz
<b>Input Frequency Band 2</b>	18.70 - 19.70 GHz
<b>Input Frequency Band 3</b>	19.70 - 20.70 GHz
<b>LO Frequency 1</b>	16.75 GHz
<b>LO Frequency 2</b>	17.75 GHz
<b>LO Frequency 3</b>	18.75 GHz
<b>LO Stability</b>	±25 kHz
<b>LO Type</b>	PLL
<b>Noise Figure Max</b>	1.5 dB
<b>Noise Figure Typ</b>	1.3 dB
<b>Number Of Onboard Los</b>	Triple-Band
<b>Output Frequency Band 1</b>	950 - 1950 MHz
<b>Output Frequency Band 2</b>	950 - 1950 MHz
<b>Output Frequency Band 3</b>	950 - 1950 MHz
<b>Tone Frequency</b>	22 kHz ± 4 kHz

## RF SPECIFICATIONS

<b>Control Signal 1</b>	13V / No Tone
<b>Control Signal 2</b>	13V / 22kHz Tone
<b>Control Signal 3</b>	18V / No Tone
<b>Conversion Gain Max</b>	65 dB
<b>Conversion Gain Min</b>	55 dB

## Innovative Communication Solutions

Conversion Gain Typ	60 dB
Gain Flatness (over Full Band)	≤ 5 dB p-p max.
Input VSWR	2.5 : 1 max.
Output P1db	+ 5 dBm min.

## ELECTRICAL SPECIFICATIONS

Current Consumption	450 mA max
Power Requirements	+12 to +24V DC

## INTERFACE SPECIFICATIONS

IF Connector	N-Connector
RF Input Connector	WR-42 Waveguide Grooved

## ENVIRONMENTAL SPECIFICATIONS

Humidity	0 - 100%
IP Rating	IP 66
Temperature Operational	-40°C to +70°C
Temperature Storage	-45 to +80°C

## PHYSICAL SPECIFICATIONS

Product Height	1.70 in
Product Length	4.67 in
Product Weight	0.4 kg
Product Width	1.72 in

## LOGISTICS SPECIFICATIONS

HS Code	Country of Origin	Ex Works	ECCN Number	Unit Package
	Made in Canada	Richmond, BC, Canada	EAR99	135 mm x 68 mm x 48 mm   0.48 kg


## HOW TO ORDER



## 7200HSAF



### MECHANICAL DIAGRAMS

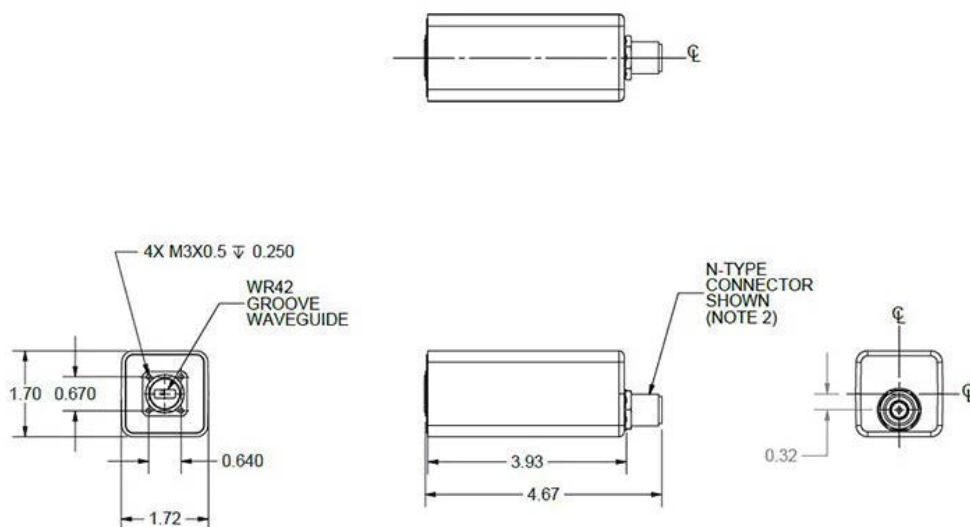



Norsat  
International Inc.

## Innovative Communication Solutions

Dual Band			Triple Band		
Band	RF freq. (GHz)	Voltage/Tone	Band	RF Freq. (GHz)	Voltage/Tone
A	Band 1	17.75 - 18.75	A	Band 1	17.70 - 18.70
	Band 2	18.35 - 19.35		Band 2	18.45 - 19.45
B	Band 1	18.20 - 19.20		Band 3	19.20 - 20.20
	Band 2	19.20 - 20.20	B	Band 1	17.70 - 18.70
C	Band 1	18.40 - 19.40		Band 2	18.70 - 19.70
	Band 2	19.20 - 20.20		Band 3	19.70 - 20.20
D	Band 1	19.20 - 20.20	C	Band 1	17.90 - 18.30
	Band 2	20.20 - 21.20		Band 2	18.30 - 19.30
E	Band 1	17.20 - 18.20		Band 3	19.30 - 20.30
	Band 2	17.50 - 18.50	D	Band 1	18.20 - 19.20
E	Band 1	17.50 - 18.50		Band 2	19.20 - 20.20
	Band 2	17.50 - 18.50		Band 3	20.20 - 21.20
Quad Band			Five Band		
Band	RF Freq. (GHz)	Voltage/Tone	Band	RF Freq. (GHz)	Voltage/Tone
A	Band 1	17.20 - 18.20	A	Band 1	17.20 - 18.20
	Band 2	18.20 - 19.20		Band 2	18.00 - 19.00
	Band 3	19.20 - 20.20		Band 3	18.70 - 19.70
	Band 4	20.20 - 21.20		Band 4	19.40 - 20.40
B	Band 1	17.50 - 18.50		Band 5	20.30 - 21.30
	Band 2	18.40 - 19.40			
	Band 3	19.30 - 20.30			
	Band 4	20.20 - 21.20			

Norsat  
International Inc.



Esatcom Inc  
Norsat authorized distributor  
[www.esatcom.com](http://www.esatcom.com)

Tel  
718.799.0084

Email  
[sales@esatcom.com](mailto:sales@esatcom.com)