

Innovative Communication Solutions

7500HDBN

7000 Dual-Band Ka-Band PLL LNB

Frequency: B: 18.20 - 19.20 GHz | 19.20 - 20.20 GHz

L.O. Stability: +/- 50 kHz Output Connector: N: 50 Ohm









KEY SPECIFICATIONS

Band Ka-Band Input Frequency Band 1 18.20 - 19.20 GHz

Input Frequency Band 2 19.20 - 20.20 GHz

17.25 GHz LO Frequency 1 18.25 GHz LO Frequency 2 ±50 kHz LO Stability

PLL LO Type

1.5 dB **Noise Figure Max**

Noise Figure Typ 1.3 dB

Number Of Onboard Los Dual-Band

Output Frequency Band 1 950 - 1950 MHz

Output Frequency Band 2 950 - 1950 MHz

Tone Frequency 22 kHz ± 4 kHz

RF SPECIFICATIONS

Control Signal 1 13V / No Tone

Control Signal 2 18V / No Tone

Conversion Gain Max 65 dB

Conversion Gain Min 55 dB

Conversion Gain Typ 60 dB

Gain Flatness (over Full Band) \leq 5 dB p-p max.

Input VSWR 2.5 : 1 max.

Output P1db + 5 dBm min.





Innovative Communication Solutions

ELECTRICAL SPECIFICATIONS

Current Consumption 450 mA max

Power Requirements +12 to +24V DC

INTERFACE SPECIFICATIONS

IF Connector N-Connector

RF Input Connector WR-42 Waveguide Grooved

ENVIRONMENTAL SPECIFICATIONS

Humidity 0 - 100%

IP Rating IP 66

Temperature Operational -40°C to +70°C

Temperature Storage -45 to +80°C


PHYSICAL SPECIFICATIONS

Product Height1.70 inProduct Length4.67 inProduct Weight0.4 kgProduct Width1.72 in

LOGISTICS SPECIFICATIONS

HS Code	Country of Origin	Ex Works	ECCN Number	Unit Package
	Made in Canada	Richmond, BC, Canada	EAR99	135 mm x 68 mm x 48

HOW TO ORDER

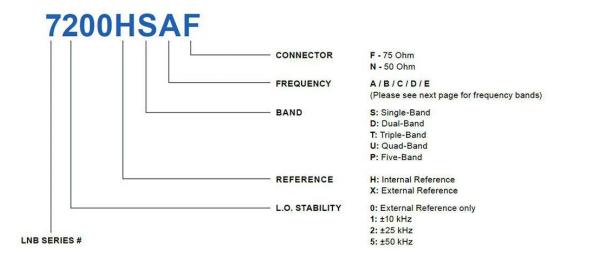


MECHANICAL DIAGRAMS





Innovative Communication Solutions



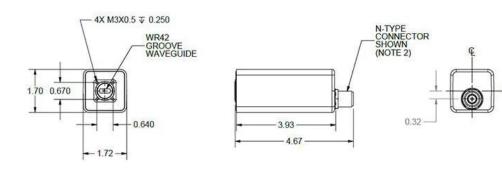

		Dual Band		Triple Band				
Band	RF freq. (GHz)		Voltage/Tone	Band	RF Freq. (GHz)		Voltage/Tone	
A	Band 1	17.75 - 18.75	13 V	A	Band 1	17.70 - 18.70	13 V	
		Tacantario Marianario D	Producto		Band 2	18.45 - 19.45	13 V / 22 kHz	
	Band 2	18.35 - 19.35	18 V		Band 3	19.20 - 20.20	18 V	
В	Band 1	18.20 - 19.20	13 V	1944	Band 1	17.70 - 18.70	13 V	
	D 10	10.00	12.11	В	Band 2	18.70 - 19.70	13 V / 22 kHz	
	Band 2	19.20 - 20.20	18 V		Band 3	19.70 - 20.20	18 V	
С	Band 1	18.40 - 19.40	13 V	С	Band 1	17.90 - 18.30	13 V	
		40.00 00.00	1000		Band 2	18.30 - 19.30	13 V / 22 kHz	
	Band 2	19.20 - 20.20	18 V		Band 3	19.30 - 20.30	18 V	
D	Band 1	19.20 - 20.20	13 V		Band 1	18.20 - 19.20	13 V	
	- 10	120 22 21 21	7272	D	Band 2	19.20 - 20.20	13 V / 22 kHz	
	Band 2	20.20 - 21.20	18 V		Band 3	20.20 - 21.20	18 V	
E -	Band 1	17.20 - 18.20	13 V	E	Band 1	17.50 - 18.50	13 V	
					Band 2	18.20 - 19.20	13 V / 22 kHz	
	Band 2	17.50 - 18.50	18 V		Band 3	19.20 - 20.20	18 V	
		Quad Band				Five Band		
Band	RF	F Freq. (GHz)	Voltage/Tone	Band	RF Freq. (GHz)		Voltage/Tone	
Α .	Band 1	17.20 - 18.20	13 V	A	Band 1	17.20 - 18.20	13 V	
	Band 2	18.20 - 19.20	13 V / 22 kHz		XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX	2 K090 EV C0080 11.50-0-140000000	000000000	
	Band 3	19.20 - 20.20	18 V		Band 2	18.00 - 19.00	13 V / 22 kHz	
	Band 4	20.20 - 21.20	18 V / 22 kHz		5 10	10.70 10.70	1011	
В	Band 1	17.50 - 18.50	13 V		Band 3	18.70 - 19.70	18 V	
	Band 2	18.40 - 19.40	13 V / 22 kHz		Band 4	19.40 - 20.40	18 V / 22 kHz	
	Band 3	19.30 - 20.30	18 V		2002 5202	0.000 30 (0.000 30)	590W	
	Band 4	20.20 - 21.20	18 V / 22 kHz		Band 5	20.30 - 21.30	24 V	





Tel 718.799.0084

Email sales@esatcom.com