

Innovative Communication Solutions

7200HDEF

7000 Dual-Band Ka-Band PLL LNB

Frequency: E: 17.20 - 18.20 GHz | 17.50 - 18.50 GHz L.O. Stability: +/- 25 kHz Output Connector: F: 75 Ohm

CE 🖌





KEY SPECIFICATIONS

Band	Ka-Band
Input Frequency Band 1	17.20 - 18.20 GHz
Input Frequency Band 2	17.50 - 18.50 GHz
LO Frequency 1	16.25 GHz
LO Frequency 2	16.55 GHz
LO Stability	±25 kHz
LO Туре	PLL
Noise Figure Max	1.5 dB
Noise Figure Typ	1.3 dB
Number Of Onboard Los	Dual-Band
Output Frequency Band 1	950 - 1950 MHz
Output Frequency Band 2	950 - 1950 MHz
Tone Frequency	22 kHz ± 4 kHz

RF SPECIFICATIONS

Control Signal 1	13V / No Tone
Control Signal 2	18V / No Tone
Conversion Gain Max	65 dB
Conversion Gain Min	55 dB
Conversion Gain Typ	60 dB
Gain Flatness (over Full Band)	≤ 5 dB p-p max.
Input VSWR	2.5 : 1 max.
Output P1db	+ 5 dBm min.






Innovative Communication Solutions

ELECTRICAL SPECIFICATION	NS	
Current Consumption	450 mA max	
Power Requirements	+12 to +24V DC	
INTERFACE SPECIFICATION	S	
IF Connector	F-Connector	
RF Input Connector	but Connector WR-42 Waveguide Grooved	
ENVIRONMENTAL SPECIFIC	ATIONS	
Humidity	0 - 100%	
IP Rating	IP 66	
Temperature Operational	-40°C to +70°C	
Temperature Storage	-45 to +80°C	
PHYSICAL SPECIFICATIONS		
Product Height	1.70 in	
Product Length	4.67 in	
Product Weight	0.4 kg	
Product Width	1.72 in	

LOGISTICS SPECIFICATIONS

HS Code	Code Country of Origin		ECCN Number	Unit Package	
	Made in Canada	Richmond, BC, Canada	EAR99	135 mm x 68 mm x 48 mm 0.48 kg	

HOW TO ORDER

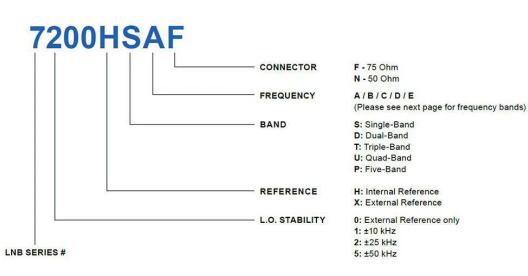



MECHANICAL DIAGRAMS



Innovative Communication Solutions







		Dual Band				Triple Band	
Band	RF freq. (GHz)		Voltage/Tone	Band	Band RF Freq. (GHz)		
A	Band 1	17.75 - 18.75	13 V	A	Band 1	17.70 - 18.70	13 V
					Band 2	18.45 - 19.45	13 V / 22 kHz
	Band 2	18.35 - 19.35	18 V		Band 3	19.20 - 20.20	18 V
в	Band 1	18.20 - 19.20	13 V	в	Band 1	17.70 - 18.70	13 V
	2.10	10.00 00.00	18 V		Band 2	18.70 - 19.70	13 V / 22 kHz
	Band 2	19.20 - 20.20	18 V		Band 3	19.70 - 20.20	18 V
	Band 1	18.40 - 19.40	13 V		Band 1	17.90 - 18.30	13 V
С	0	40.00 00.00	10.11	C	Band 2	18.30 - 19.30	13 V / 22 kHz
	Band 2	19.20 - 20.20	18 V		Band 3	19.30 - 20.30	18 V
	Band 1	19.20 - 20.20	13 V	279.65	Band 1	18.20 - 19.20	13 V
D			7270	D	Band 2	19.20 - 20.20	13 V / 22 kHz
	Band 2	20.20 - 21.20	18 V		Band 3	20.20 - 21.20	18 V
	Band 1	17.20 - 18.20	13 V		Band 1	17.50 - 18.50	13 V
E	- IO	17 50 10 50	18 V	E	Band 2	18.20 - 19.20	13 V / 22 kHz
	Band 2	17.50 - 18.50	18 V		Band 3	19.20 - 20.20	18 V
		Quad Band				Five Band	
Band	RF Freq. (GHz) Voltage/Tone	Voltage/Tone	Band	RF Freq. (GHz)		Voltage/Tone	
	Band 1	17.20 - 18.20	13 V		Band 1	17.20 - 18.20	13 V
A	Band 2	18.20 - 19.20	13 V / 22 kHz	A	And an		
	Band 3	19.20 - 20.20	18 V		Band 2	18.00 - 19.00	13 V / 22 kHz
	Band 4	20.20 - 21.20	18 V / 22 kHz		Band 3	18.70 - 19.70	18 V
в	Band 1	17.50 - 18.50	13 V		Band 3	18.70 - 19.70	18 V
	Band 2	18.40 - 19.40	13 V / 22 kHz		Band 4	19.40 - 20.40	18 V / 22 kHz
	Band 3	19.30 - 20.30	18 V		2 (AL) (AL)	200727 2526-226	O'ROW!
	Band 4	20.20 - 21.20	18 V / 22 kHz	7	Band 5	20.30 - 21.30	24 V



Esatcom Inc Norsat authorized distributor www.esatcom.com Tel 718.799.0084 Email sales@esatcom.com