

Innovative Communication Solutions

7100HDEN 7000 Dual-Band Ka-Band PLL LNB

Frequency: E: 17.20 - 18.20 GHz | 17.50 - 18.50 GHz L.O. Stability: +/- 10 kHz Output Connector: N: 50 Ohm







KEY SPECIFICATIONS

Band	Ka-Band
Input Frequency Band 1	17.20 - 18.20 GHz
Input Frequency Band 2	17.50 - 18.50 GHz
LO Frequency 1	16.25 GHz
LO Frequency 2	16.55 GHz
LO Stability	±10 kHz
LO Туре	PLL
Noise Figure Max	1.5 dB
Noise Figure Typ	1.3 dB
Number Of Onboard Los	Dual-Band
Output Frequency Band 1	950 - 1950 MHz
Output Frequency Band 2	950 - 1950 MHz
Tone Frequency	22 kHz ± 4 kHz

RF SPECIFICATIONS

Control Signal 1	13V / No Tone
Control Signal 2	18V / No Tone
Conversion Gain Max	65 dB
Conversion Gain Min	55 dB
Conversion Gain Typ	60 dB
Gain Flatness (over Full Band)	≤ 5 dB p-p max.
Input VSWR	2.5 : 1 max.
Output P1db	+ 5 dBm min.






Innovative Communication Solutions

ELECTRICAL SPECIFICATIONS	
Current Consumption	450 mA max
Power Requirements	+12 to +24V DC
INTERFACE SPECIFICATIONS	
IF Connector	N-Connector
RF Input Connector	WR-42 Waveguide Grooved
ENVIRONMENTAL SPECIFICATION	S
Humidity	0 - 100%
IP Rating	IP 66
Temperature Operational	-40°C to +70°C
Temperature Storage	-45 to +80°C
PHYSICAL SPECIFICATIONS	
Product Height	1.70 in
Product Length	4.67 in
Product Weight	0.4 kg
Product Width	1.72 in

LOGISTICS SPECIFICATIONS

HS Code	Country of Origin	Ex Works	ECCN Number	Unit Package	
	Made in Canada	Richmond, BC, Canada	EAR99	135 mm x 68 mm x 48 mm 0.48 kg	

HOW TO ORDER

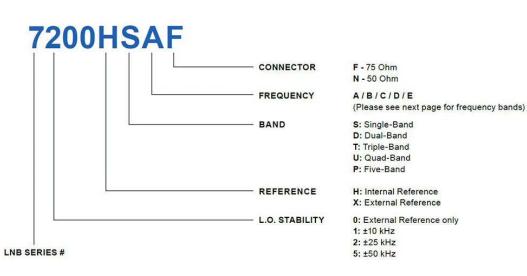



MECHANICAL DIAGRAMS



Innovative Communication Solutions







		Dual Band				Triple Band	
Band	RF freq. (GHz)		Voltage/Tone	Band	Band RF Freq. (GHz)		
A Band 1	Band 1	17.75 - 18.75	13 V		Band 1	17.70 - 18.70	13 V
				A	Band 2	18.45 - 19.45	13 V / 22 kHz
_	Band 2	18.35 - 19.35	18 V		Band 3	19.20 - 20.20	18 V
B	Band 1	18.20 - 19.20	13 V	в	Band 1	17.70 - 18.70	13 V
		10/20 10/20	1011		Band 2	18.70 - 19.70	13 V / 22 kHz
	Band 2	19.20 - 20.20	18 V		Band 3	19.70 - 20.20	18 V
	Band 1	18.40 - 19.40	13 V	c	Band 1	17.90 - 18.30	13 V
С	0	40.00 00.00	10.14		Band 2	18.30 - 19.30	13 V / 22 kHz
	Band 2	19.20 - 20.20	18 V		Band 3	19.30 - 20.30	18 V
	Band 1	19.20 - 20.20	13 V	279.65	Band 1	18.20 - 19.20	13 V
D	Des 40	22.22.21.22	18 V	D	Band 2	19.20 - 20.20	13 V / 22 kHz
	Band 2	20.20 - 21.20	18 V		Band 3	20.20 - 21.20	18 V
	Band 1	17.20 - 18.20	13 V		Band 1	17.50 - 18.50	13 V
E	Band 2	17.50 - 18.50	18 V	E	Band 2	18.20 - 19.20	13 V / 22 kHz
	Band 2	AND A DEPARTMENT	18 V		Band 3	19.20 - 20.20	18 V
		Quad Band			1	Five Band	
Band	RF Freq. (GHz)		Voltage/Tone	Band	RF Freq. (GHz)		Voltage/Tone
	Band 1	17.20 - 18.20	13 V		Band 1	17.20 - 18.20	13 V
<u>.</u>	Band 2	18.20 - 19.20	13 V / 22 kHz	Α	Arrested by Dec.		endotex ()
A	Band 3	19.20 - 20.20	18 V		Band 2	18.00 - 19.00	13 V / 22 kHz
	Band 4	20.20 - 21.20	18 V / 22 kHz		Band 3	18.70 - 19.70	18 V
	Band 1	17.50 - 18.50	13 V		Darid 3	10.70 - 19.70	18 V
в	Band 2	18.40 - 19.40	13 V / 22 kHz		Band 4	19.40 - 20.40	18 V / 22 kHz
D	Band 3	19.30 - 20.30	18 V		224 100	and a second	28270
	Band 4	20.20 - 21.20	18 V / 22 kHz		Band 5	20.30 - 21.30	24 V



Esatcom Inc Norsat authorized distributor www.esatcom.com Tel 718.799.0084

Email sales@esatcom.com