

Innovative Communication Solutions

7000XDBN 7000 Dual-Band Ka-Band PLL LNB

Frequency: B: 18.20 - 19.20 GHz | 19.20 - 20.20 GHz L.O. Stability: External Reference Output Connector: N: 50 Ohm

CE 🖌





KEY SPECIFICATIONS

Band	Ka-Band
Input Frequency Band 1	18.20 - 19.20 GHz
Input Frequency Band 2	19.20 - 20.20 GHz
LO Frequency 1	17.25 GHz
LO Frequency 2	18.25 GHz
LO Stability	Ext Ref
LO Туре	PLL
Noise Figure Max	1.5 dB
Noise Figure Typ	1.3 dB
Number Of Onboard Los	Dual-Band
Output Frequency Band 1	950 - 1950 MHz
Output Frequency Band 2	950 - 1950 MHz
Tone Frequency	22 kHz ± 4 kHz

RF SPECIFICATIONS

Control Signal 1	13V / No Tone
Control Signal 2	18V / No Tone
Conversion Gain Max	65 dB
Conversion Gain Min	55 dB
Conversion Gain Typ	60 dB
Gain Flatness (over Full Band)	≤ 5 dB p-p max.
Input VSWR	2.5 : 1 max.
Output P1db	+ 5 dBm min.






Innovative Communication Solutions

ELECTRICAL SPECIFICATIONS	
Current Consumption	450 mA max
Power Requirements	+12 to +24V DC
INTERFACE SPECIFICATIONS	
IF Connector	N-Connector
RF Input Connector	WR-42 Waveguide Grooved
ENVIRONMENTAL SPECIFICATION	S
Humidity	0 - 100%
IP Rating	IP 66
Temperature Operational	-40°C to +70°C
Temperature Storage	-45 to +80°C
PHYSICAL SPECIFICATIONS	
Product Height	1.70 in
Product Length	4.67 in
Product Weight	0.4 kg
Product Width	1.72 in

LOGISTICS SPECIFICATIONS

HS Code	Country of Origin	Ex Works	ECCN Number	Unit Package
	Made in Canada	Richmond, BC, Canada	EAR99	135 mm x 68 mm x 48 mm 0.48 kg

HOW TO ORDER

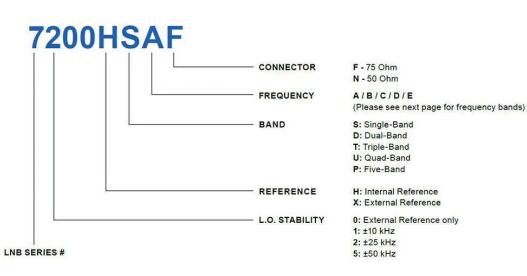



MECHANICAL DIAGRAMS



Innovative Communication Solutions







		Dual Band				Triple Band	
Band	RF freq. (GHz)		Voltage/Tone	Band	Band RF Freq. (GHz)		
Α	Band 1	17.75 - 18.75	13 V		Band 1	17.70 - 18.70	13 V
				A	Band 2	18.45 - 19.45	13 V / 22 kHz
_	Band 2	18.35 - 19.35	18 V		Band 3	19.20 - 20.20	18 V
в —	Band 1	18.20 - 19.20	13 V	В	Band 1	17.70 - 18.70	13 V
		10.00 00.00	18 V		Band 2	18.70 - 19.70	13 V / 22 kHz
	Band 2	19.20 - 20.20	18 V		Band 3	19.70 - 20.20	18 V
	Band 1	18.40 - 19.40	13 V		Band 1	17.90 - 18.30	13 V
C			1011	- C	Band 2	18.30 - 19.30	13 V / 22 kHz
	Band 2	19.20 - 20.20	18 V		Band 3	19.30 - 20.30	18 V
	Band 1	19.20 - 20.20	13 V	D	Band 1	18.20 - 19.20	13 V
D			72707		Band 2	19.20 - 20.20	13 V / 22 kHz
	Band 2	20.20 - 21.20	18 V		Band 3	20.20 - 21.20	18 V
E	Band 1	17.20 - 18.20	13 V	E	Band 1	17.50 - 18.50	13 V
	Band 2	17.50 - 18.50	18 V		Band 2	18.20 - 19.20	13 V / 22 kHz
	Band 2	MARKED BURNER	18 V		Band 3	19.20 - 20.20	18 V
		Quad Band				Five Band	
Band	RI	F Freq. (GHz)	Voltage/Tone	Band	RF Freq. (GHz)		Voltage/Tone
	Band 1	17.20 - 18.20	13 V		Band 1	17.20 - 18.20	13 V
A	Band 2	18.20 - 19.20	13 V / 22 kHz		Arrested by Dec.		CONSTRUCT
	Band 3	19.20 - 20.20	18 V		Band 2	18.00 - 19.00	13 V / 22 kHz
	Band 4	20.20 - 21.20	18 V / 22 kHz		Band 3	18,70 - 19,70	18 V
	Band 1	17.50 - 18.50	13 V		Banu 3	18.70 - 19.70	10 V
в	Band 2	18.40 - 19. <mark>4</mark> 0	13 V / 22 kHz		Band 4	19.40 - 20.40	18 V / 22 kHz
•	Band 3	19.30 - 20.30	18 V		224 100	MACON SERVICE	2822
	Band 4	20.20 - 21.20	18 V / 22 kHz]	Band 5	20.30 - 21.30	24 V



Esatcom Inc Norsat authorized distributor www.esatcom.com Tel 718.799.0084

Email sales@esatcom.com