

#### **Innovative Communication Solutions**

# 7000XDDF

# 7000 Dual-Band Ka-Band PLL LNB

Frequency: D: 19.20 - 20.20 GHz | 20.20 - 21.20 GHz L.O. Stability: External Reference Output Connector: F: 75 Ohm

CE 🖌





### **KEY SPECIFICATIONS**

Band	Ka-Band
Input Frequency Band 1	19.20 - 20.20 GHz
Input Frequency Band 2	20.20 - 21.20 GHz
LO Frequency 1	18.25 GHz
LO Frequency 2	19.25 GHz
LO Stability	Ext Ref
LO Туре	PLL
Noise Figure Max	1.5 dB
Noise Figure Typ	1.3 dB
Number Of Onboard Los	Dual-Band
Output Frequency Band 1	950 - 1950 MHz
Output Frequency Band 2	950 - 1950 MHz
Tone Frequency	22 kHz ± 4 kHz

# **RF SPECIFICATIONS**

Control Signal 1	13V / No Tone
Control Signal 2	18V / No Tone
Conversion Gain Max	65 dB
Conversion Gain Min	55 dB
Conversion Gain Typ	60 dB
Gain Flatness (over Full Band)	≤ 5 dB p-p max.
Input VSWR	2.5 : 1 max.
Output P1db	+ 5 dBm min.






#### **Innovative Communication Solutions**

ELECTRICAL SPECIFICATION	NS	
Current Consumption	450 mA max	
Power Requirements	+12 to +24V DC	
INTERFACE SPECIFICATION	S	
IF Connector	F-Connector	
RF Input Connector	WR-42 Waveguide Grooved	
ENVIRONMENTAL SPECIFIC	ATIONS	
Humidity	0 - 100%	
IP Rating	IP 66	
Temperature Operational	-40°C to +70°C	
Temperature Storage	-45 to +80°C	
PHYSICAL SPECIFICATIONS		
Product Height	1.70 in	
Product Length	4.67 in	
Product Weight	0.4 kg	
Product Width	1.72 in	

#### LOGISTICS SPECIFICATIONS

HS Code	Country of Origin	Ex Works	ECCN Number	Unit Package	
	Made in Canada	Richmond, BC, Canada	EAR99	135 mm x 68 mm x 48 mm   0.48 kg	

# **HOW TO ORDER**

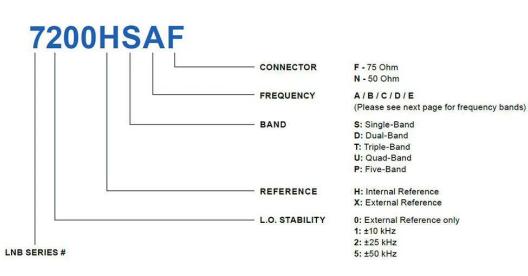



#### **MECHANICAL DIAGRAMS**



# **Innovative Communication Solutions**







		Dual Band				Triple Band	
Band	RI	F freq. (GHz)	Voltage/Tone	Band	Band RF Freq. (GHz)		
	Band 1	17.75 - 18.75	13 V		Band 1	17.70 - 18.70	13 V
A		The second se	Protection (	A	Band 2	18.45 - 19.45	13 V / 22 kHz
_	Band 2	18.35 - 19.35	18 V		Band 3	19.20 - 20.20	18 V
B	Band 1	18.20 - 19.20	13 V		Band 1	17.70 - 18.70	13 V
		10.00 00.00	18 V	В	Band 2	18.70 - 19.70	13 V / 22 kHz
	Band 2	19.20 - 20.20	18 V		Band 3	19.70 - 20.20	18 V
	Band 1 18.40 - 19.40 13 V		Band 1	17.90 - 18.30	13 V		
c	Dendo	10.00 00.00	18 V	C	Band 2	18.30 - 19.30	13 V / 22 kHz
	Band 2	19.20 - 20.20	18 V		Band 3	19.30 - 20.30	18 V
	Band 1	19.20 - 20.20	13 V		Band 1	18.20 - 19.20	13 V
D			18 V	D	Band 2	19.20 - 20.20	13 V / 22 kHz
	Band 2	20.20 - 21.20	18 V		Band 3	20.20 - 21.20	18 V
	Band 1	17.20 - 18.20	13 V	E	Band 1	17.50 - 18.50	13 V
E	- IO	47.50 49.50	18 V		Band 2	18.20 - 19.20	13 V / 22 kHz
	Band 2	17.50 - 18.50			Band 3	19.20 - 20.20	18 V
		Quad Band				Five Band	
Band	R	Freq. (GHz)	Voltage/Tone	Band	RI	F Freq. (GHz)	Voltage/Tone
	Band 1	17.20 - 18.20	13 V	A	Band 1	17.20 - 18.20	13 V
A -	Band 2	18.20 - 19.20	13 V / 22 kHz				2007-200
	Band 3	19.20 - 20.20	18 V		Band 2	18.00 - 19.00	13 V / 22 kHz
	Band 4	20.20 - 21.20	18 V / 22 kHz		Band 3	18,70 - 19,70	18 V
	Band 1	17.50 - 18.50	13 V		Dalid 3	10.10 - 19.70	10 V
в	Band 2	18.40 - 19.40	13 V / 22 kHz		Band 4	19.40 - 20.40	18 V / 22 kHz
	Band 3	19.30 - 20.30	18 V		22		
	Band 4	20.20 - 21.20	18 V / 22 kHz		Band 5	20.30 - 21.30	24 V



Esatcom Inc Norsat authorized distributor www.esatcom.com Tel 718.799.0084

Email sales@esatcom.com