

# 1108HEN

## 1000 Ku-Band Single Band PLL LNB

**L.O Stability:** 1:  $\pm 10$  kHz

**Output Connector:** N: 50 Ohm



## KEY SPECIFICATIONS

|                         |                   |
|-------------------------|-------------------|
| Band                    | Ku-Band           |
| Input Frequency Band 1  | 10.95 - 12.75 GHz |
| LO Frequency 1          | 10.00 GHz         |
| LO Stability            | $\pm 10$ kHz      |
| LO Type                 | PLL               |
| Noise Figure Max        | 1.0 dB            |
| Noise Figure Typ        | 0.8 dB            |
| Number Of Onboard Los   | Single-Band       |
| Output Frequency Band 1 | 950 - 2750 MHz    |

## RF SPECIFICATIONS

|                                |                 |
|--------------------------------|-----------------|
| Conversion Gain Max            | 65 dB           |
| Conversion Gain Min            | 50 dB           |
| Conversion Gain Typ            | 55 dB           |
| Gain Flatness (over Full Band) | $\leq 6$ dB p-p |
| Input VSWR                     | 2.5 : 1 max.    |
| Output P1db                    | + 3 dBm min.    |
| Output VSWR                    | 2.2 : 1 max.    |
| Phase Noise 100kHz Offset Max  | -90 dBc/Hz      |

## ELECTRICAL SPECIFICATIONS

|                     |                |
|---------------------|----------------|
| Current Consumption | 350 mA max.    |
| Power Requirements  | +12 to +24V DC |

## INTERFACE SPECIFICATIONS

|                    |                         |
|--------------------|-------------------------|
| IF Connector       | N-Connector             |
| RF Input Connector | WR-75 waveguide grooved |



### M and C SPECIFICATIONS

|                |      |
|----------------|------|
| Led Indicators | None |
|----------------|------|

### ENVIRONMENTAL SPECIFICATIONS

|                         |                |
|-------------------------|----------------|
| IP Rating               | IP 67          |
| Temperature Operational | -40°C to +60°C |
| Temperature Storage     | -40 to +80°C   |


### PHYSICAL SPECIFICATIONS

|                |        |
|----------------|--------|
| Product Height | 42 mm  |
| Product Length | 130 mm |
| Product Weight | 0.4 kg |
| Product Width  | 60 mm  |

### LOGISTICS SPECIFICATIONS

| HS Code    | Country of Origin             | Ex Works             | ECCN Number | Unit Package     |
|------------|-------------------------------|----------------------|-------------|------------------|
| 8517690000 | Made in the Republic of Korea | Richmond, BC, Canada | EAR99       | 145 x 95 x 65 mm |

### HOW TO ORDER

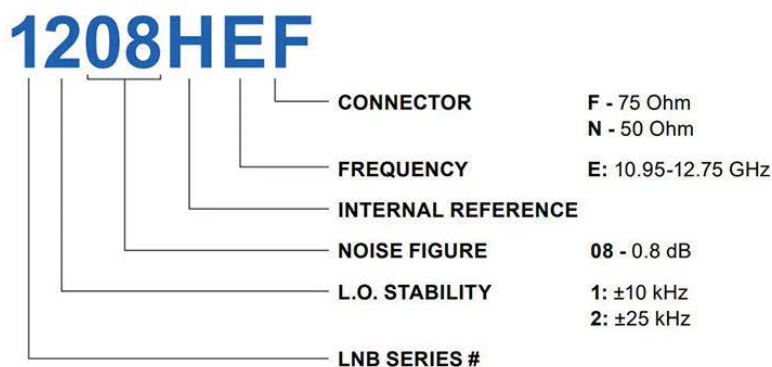


### MECHANICAL DIAGRAMS



Norsat  
International Inc.

Innovative Communication Solutions

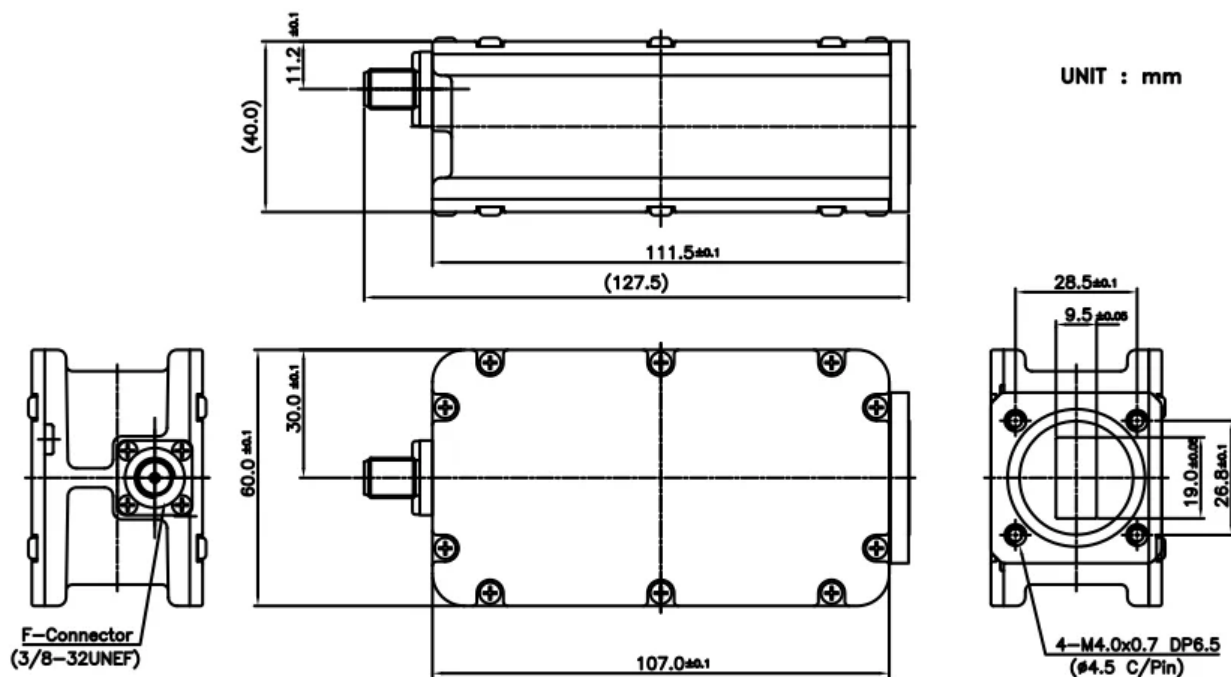

Norsat  
International Inc.

ESATCOM  
INC

Norsat authorized distributor

Esatcom Inc.

3628 Francis Lewis Blvd.

Flushing, NY 11358

[www.esatcom.com](http://www.esatcom.com)

Tel: 718.799.0084

Email: [sales@esatcom.com](mailto:sales@esatcom.com)