

1008XG-2

1000 Ku-Band Single Band EXT REF LNB

Frequency: G: 12.20 - 12.70 GHz

Output Connector: F: 75 Ohm



KEY SPECIFICATIONS

Band	Ku-Band
External Ref Freq	10 MHz (sine-wave), - 5 to +5 dBm
Input Frequency Band 1	12.20 - 12.70 GHz
LO Frequency 1	11.25 GHz
LO Stability	Ext Ref
LO Type	EXT
Noise Figure Max	1.0 dB
Noise Figure Typ	0.8 dB
Number Of Onboard Los	Single-Band
Output Frequency Band 1	950 - 1450 MHz

RF SPECIFICATIONS

Conversion Gain Max	65 dB
Conversion Gain Min	55 dB
Conversion Gain Typ	60 dB
Input VSWR	2.5 : 1 max.
Output P1db	+ 5 dBm min.
Output VSWR	2.0 : 1 max.

ELECTRICAL SPECIFICATIONS

Current Consumption	250 mA
Power Requirements	+12 to +24V DC

INTERFACE SPECIFICATIONS

IF Connector	F-Connector
RF Input Connector	WR-75 waveguide grooved

M and C SPECIFICATIONS

Led Indicators	None
----------------	------



ENVIRONMENTAL SPECIFICATIONS

Humidity	0 - 95%
IP Rating	IP 67
Temperature Operational	-40°C to +60°C
Temperature Storage	-40 to +80°C


PHYSICAL SPECIFICATIONS

Product Height	40 mm
Product Length	128 mm
Product Weight	0.4 kg
Product Width	60 mm

LOGISTICS SPECIFICATIONS

HS Code	Country of Origin	Ex Works	ECCN Number	Unit Package
8517690000	Made in the Republic of Korea	Richmond, BC, Canada	EAR99	145 x 95 x 65 mm

HOW TO ORDER

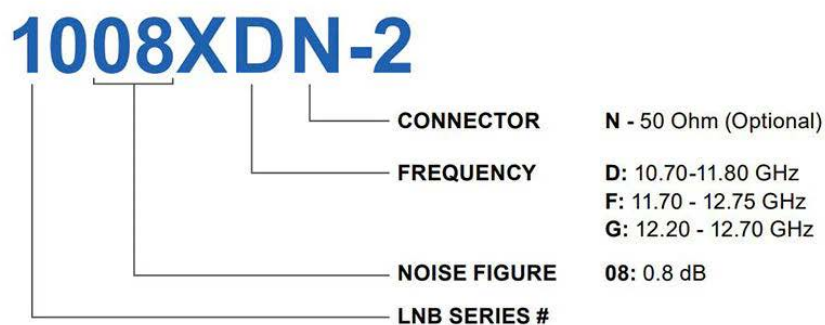


MECHANICAL DIAGRAMS



Norsat
International Inc.

Innovative Communication Solutions

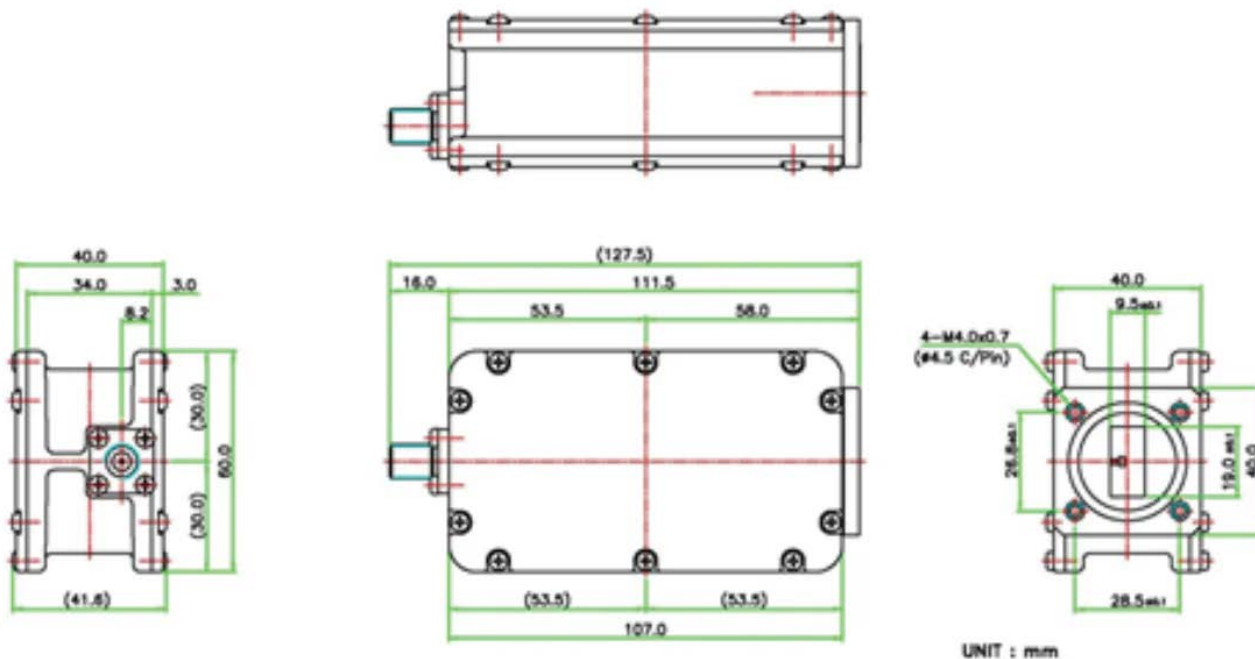

Norsat
International Inc.

ESATCOM
INC

Norsat authorized distributor

Esatcom Inc.

3628 Francis Lewis Blvd.

Flushing, NY 11358

www.esatcom.com

Tel: 718.799.0084

Email: sales@esatcom.com