

9000XAF-2

9000X-2 Ka-Band Ext Ref LNB

Frequency: A: 18.20 - 19.20 GHz

W/G Isolator: No

Output Connector: F: 75 Ohm



KEY SPECIFICATIONS

Band	Ka-Band
External Ref Freq	10 MHz (sine-wave), - 5 to +5 dBm
Input Frequency Band 1	18.20 - 19.20 GHz
LO Frequency 1	17.25 GHz
LO Stability	10MHz Ext Ref
LO Type	EXT
Noise Figure Max	1.6 dB
Noise Figure Typ	1.5 dB
Number Of Onboard Los	Single-Band
Output Frequency Band 1	950 - 1950 MHz

RF SPECIFICATIONS

Conversion Gain Max	65 dB
Conversion Gain Min	55 dB
Conversion Gain Typ	60 dB
Gain Flatness (over Full Band)	4 dB p-p max.
Image Rejection	40 dBc min.
Input VSWR	2.5 : 1 max.
Output P1db	+ 5 dBm min.
Output VSWR	2.5 : 1 max.
Phase Noise 1khz Offset Max	Depends on External Reference
Phase Noise 10khz Offset Max	Depends on External Reference
Phase Noise 100khz Offset Max	Depends on External Reference

ELECTRICAL SPECIFICATIONS

Current Consumption	350 mA max.
Power Requirements	+12 to +24V DC

INTERFACE SPECIFICATIONS



Innovative Communication Solutions

IF Connector	F-Connector
Isolator	No Isolator
RF Input Connector	WR-42 waveguide grooved

M and C SPECIFICATIONS

Led Indicators	None
----------------	------

ENVIRONMENTAL SPECIFICATIONS

IP Rating	IP 67
Temperature Operational	-40 to +60°C

PHYSICAL SPECIFICATIONS


Product Height	42.2 mm
Product Length	98.7 mm
Product Weight	0.27 kg
Product Width	42.4 mm

LOGISTICS SPECIFICATIONS

HS Code	Country of Origin	Ex Works	ECCN Number	Unit Package
8517690000	Made in the Republic of Korea	Richmond, BC, Canada	EAR99	130 x 50 x 50 mm 0.3 kg

HOW TO ORDER

9000XAN-2


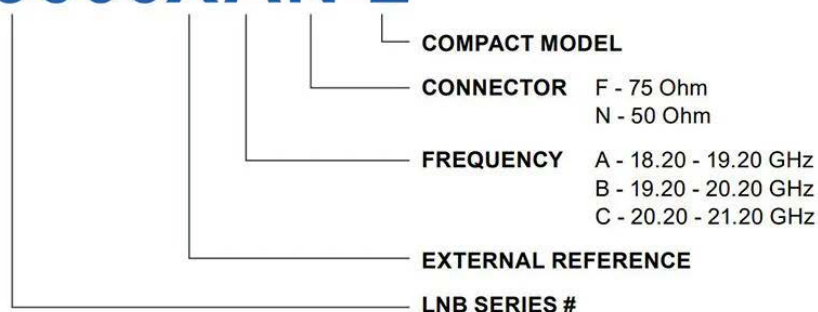


MECHANICAL DIAGRAMS



Norsat
International Inc.

Innovative Communication Solutions

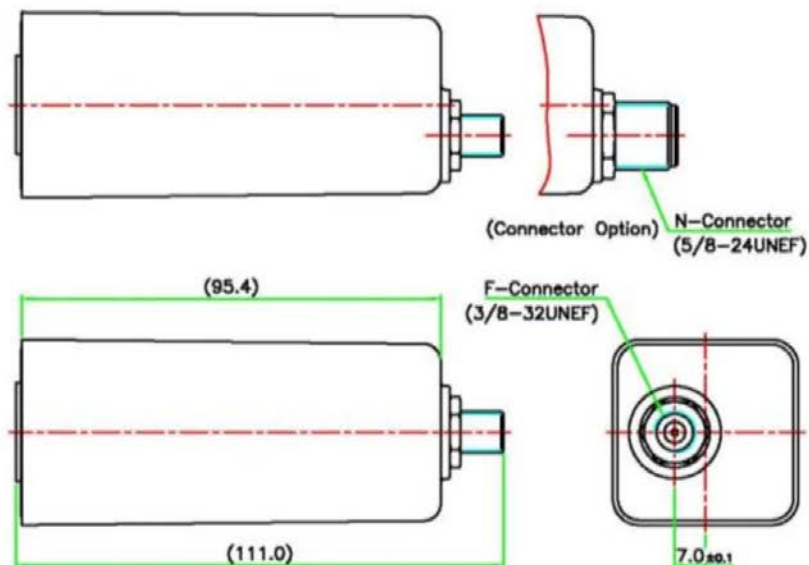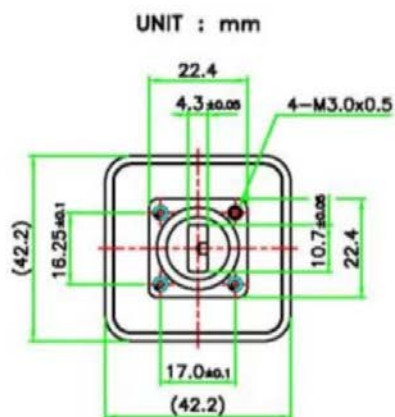

Norsat
International Inc.

ESATCOM
INC

Norsat authorized distributor

Esatcom Inc.

3628 Francis Lewis Blvd.

Flushing, NY 11358

www.esatcom.com

Tel: 718.799.0084

Email: sales@esatcom.com