

# RSLNBXSKA12R3

## LNB Redundant Switch System

### Single-Band 1:2

**Component:** LNBXS = LNB External Ref Single-Band

**Band:** Ka-Band

**Tx/Rx Config + IFL Length:** Rx only + 30m IFL



[Explore Video Course](#)



## KEY SPECIFICATIONS

Band	Ka-Band
Redundancy	1:2
Switchover Time	120 ms max.

## RF SPECIFICATIONS

Input VSWR	LNB Dependent
Insertion Loss	0.5 dB max.


## ELECTRICAL SPECIFICATIONS

Power	90 - 264 VAC (47 - 63 Hz)
-------	---------------------------

## INTERFACE SPECIFICATIONS

Component	LNB, External Ref, Single Band
IFL Cable Length	30m
RF Input Connector	Ka-Band: WR-42
RF Output Connector	N-Connector
Tx Rx Configuration	Rx Only

## ENVIRONMENTAL SPECIFICATIONS

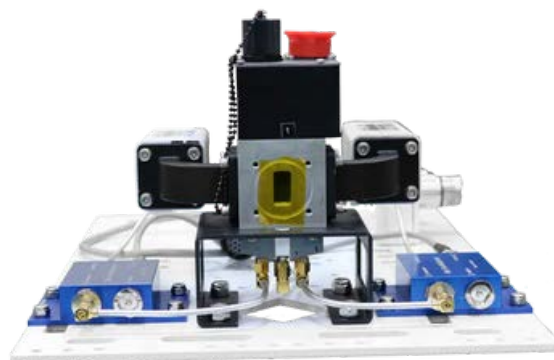



Relative Humidity	< 100%
Temperature Operational	-40°C to +60°C

### PHYSICAL SPECIFICATIONS


Product Height	295 mm
Product Length	483 mm
Product Weight	9 kg
Product Width	159 mm

### LOGISTICS SPECIFICATIONS

HS Code	Country of Origin	Ex Works	ECCN Number	Unit Package
8517690000	Made in Canada	Richmond, BC, Canada	EAR99	584 x 661 x 686 mm   54.8 kg

### HOW TO ORDER

## RSLNBISKU11R3

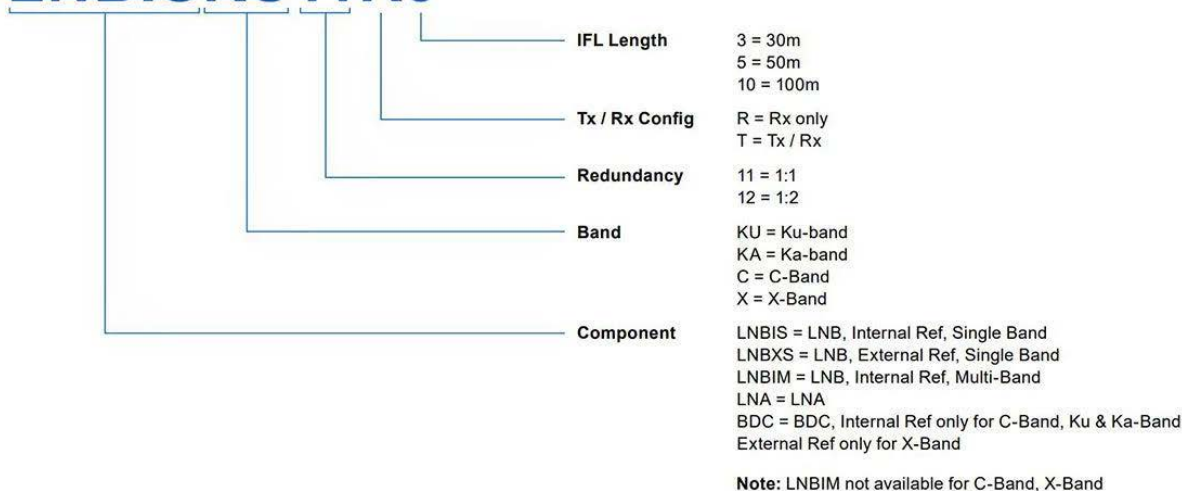


### MECHANICAL DIAGRAMS



Norsat  
International Inc.

Innovative Communication Solutions

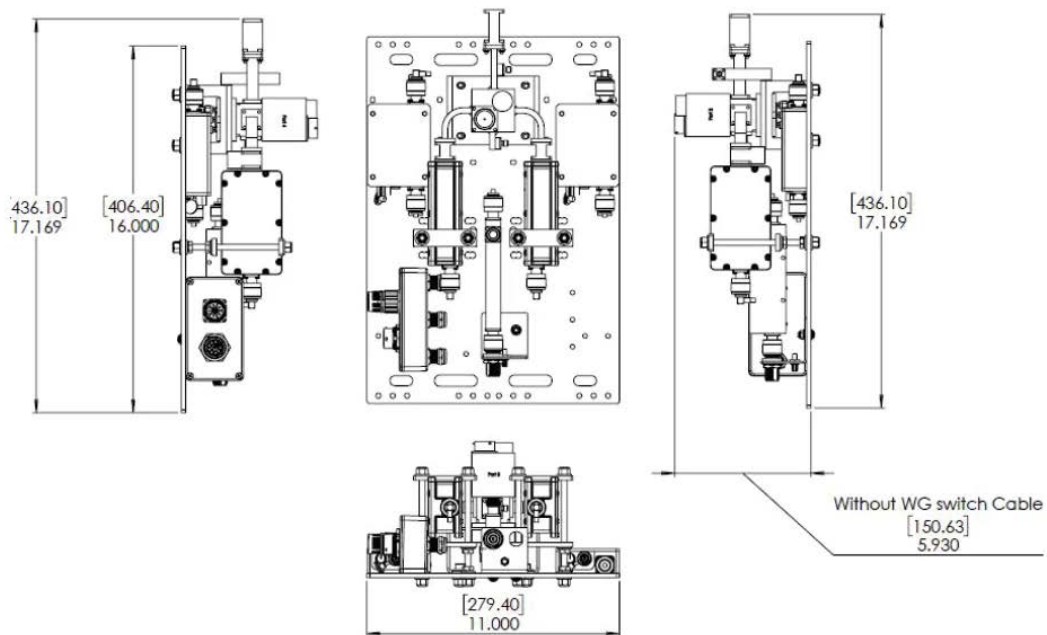

ESATCOM  
INC

Norsat authorized distributor

Esatcom Inc.

3628 Francis Lewis Blvd.

Flushing, NY 11358

[www.esatcom.com](http://www.esatcom.com)

Tel: 718.799.0084

Email: [sales@esatcom.com](mailto:sales@esatcom.com)