



# RSLNBXSKU11T10


## LNB Redundant Switch System

### Single-Band 1:1

**Component:** LNBXS = LNB External Ref Single-Band

**Band:** Ku-Band

**Tx/Rx Config + IFL Length:** Tx/Rx + 100m IFL

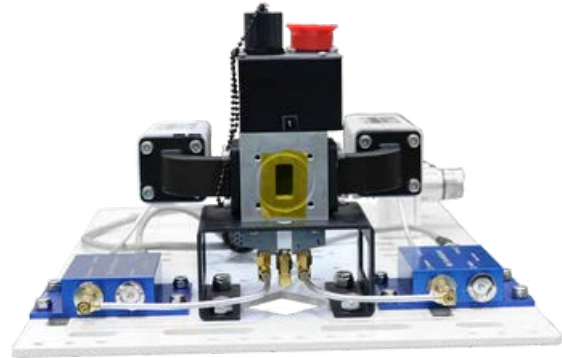

[Explore Video Course](#)



## KEY SPECIFICATIONS

Band	Ku-Band
Redundancy	1:1
Switchover Time	120 ms max.

## RF SPECIFICATIONS

Input VSWR	LNB Dependent
Insertion Loss	0.5 dB max.

## ELECTRICAL SPECIFICATIONS

Power	90 - 264 VAC (47 - 63 Hz)
-------	---------------------------

## INTERFACE SPECIFICATIONS

Component	LNB, External Ref, Single Band
IFL Cable Length	100m
RF Input Connector	Ku-Band: WR-75
RF Output Connector	N-Connector
Tx Rx Configuration	Tx / Rx

## ENVIRONMENTAL SPECIFICATIONS



Relative Humidity	< 100%
Temperature Operational	-40°C to +60°C

## PHYSICAL SPECIFICATIONS


Packaging	26 x 23 x 27 in (661 x 584 x 686 mm)
Product Height	295 mm
Product Length	483 mm
Product Weight	9 kg
Product Width	159 mm

## LOGISTICS SPECIFICATIONS

HS Code	Country of Origin	Ex Works	ECCN Number	Unit Package
8517690000	Made in Canada	Richmond, BC, Canada	EAR99	660 mm x 610 mm x 736 mm   54.8 kg

## HOW TO ORDER

# RSLNBISKU11R3

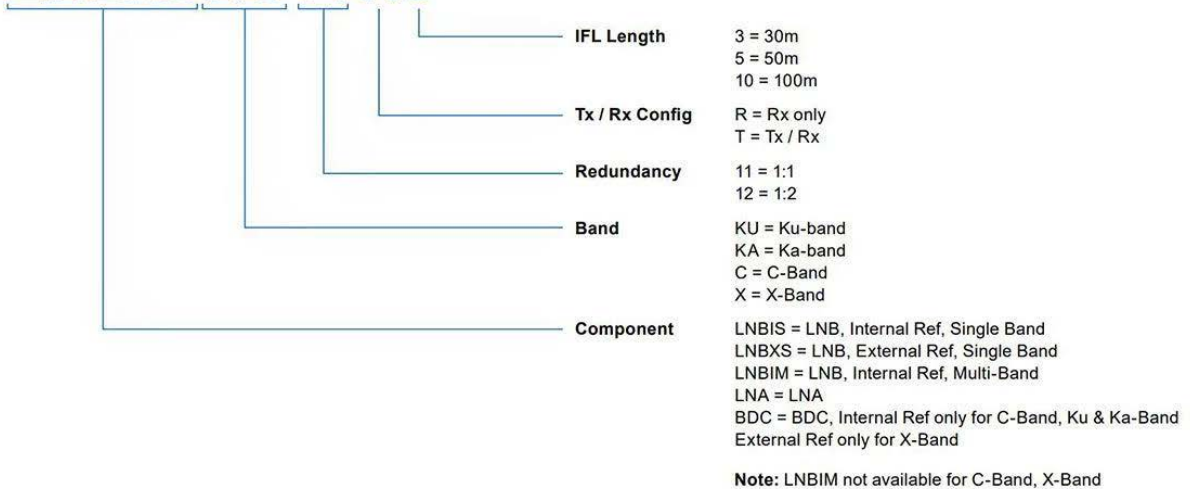


## MECHANICAL DIAGRAMS



Norsat  
International Inc.

Innovative Communication Solutions

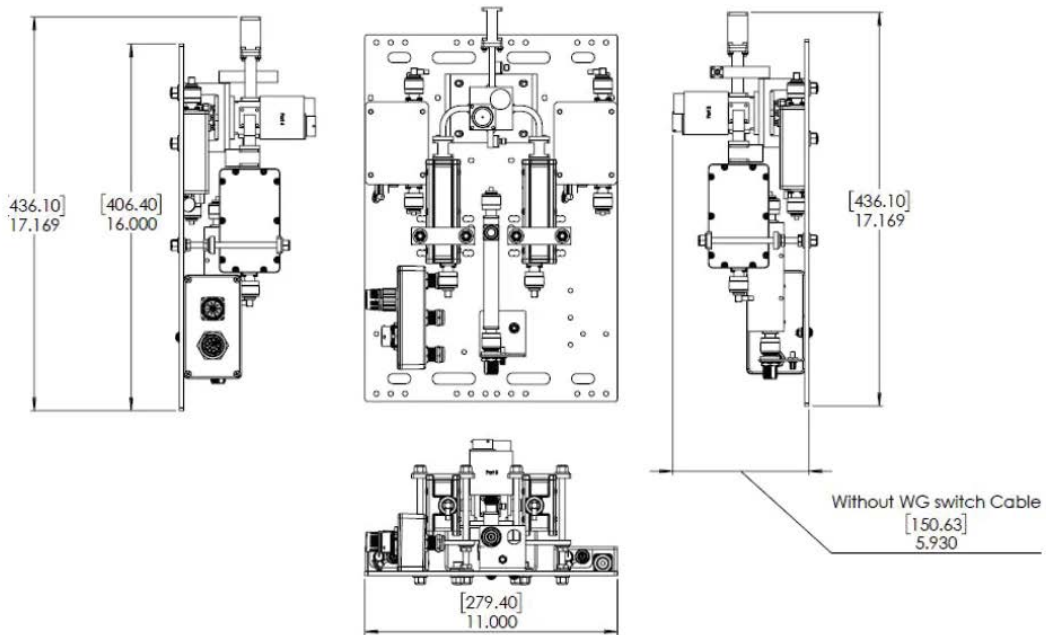

Norsat  
International Inc.

**ESATCOM**  
INC

Norsat authorized distributor

**Esatcom Inc.**  
3628 Francis Lewis Blvd.  
Flushing, NY 11358  
[www.esatcom.com](http://www.esatcom.com)  
Tel: 718.799.0084  
Email: [sales@esatcom.com](mailto:sales@esatcom.com)