

Innovative Communication Solutions

1108HUN

1000 Ku-Band Quad Band PLL LNB

L.O Stability: 1: ±10 kHz **Output Connector:** N: 50 Ohm

Norsat's Low Noise Blocks (LNBs) provide signal reception for satellite communications around the world. We offer premium performance and reliability in the smallest form factor possible. All of our standard Ku-Band LNBs are backed by a 3 year warranty and nearly forty years of experience as the industry's leading provider of high performance LNBs. 1000HU Series.









KEY SPECIFICATIONS

| Band | Ku-Band |
|-------------------------|-------------------|
| Input Frequency Band 1 | 10.70 - 11.70 GHz |
| Input Frequency Band 2 | 10.95 - 11.70 GHz |
| Input Frequency Band 3 | 11.70 - 12.75 GHz |
| Input Frequency Band 4 | 12.25 - 12.75 GHz |
| LO Frequency 1 | 9.75 GHz |
| LO Frequency 2 | 10.00 GHz |
| LO Frequency 3 | 10.75 GHz |
| LO Frequency 4 | 11.30 GHz |
| LO Stability | ±10 kHz |
| LO Type | PLL |
| Noise Figure Max | 1.0 dB |
| Noise Figure Typ | 0.8 dB |
| Number Of Onboard Los | Quad-Band |
| Output Frequency Band 1 | 950 - 1950 MHz |
| Output Frequency Band 2 | 950 - 1700 MHz |
| Output Frequency Band 3 | 950 - 2000 MHz |
| Output Frequency Band 4 | 950 - 1450 MHz |
| Tone Frequency | 22 kHz ± 4 kHz |
| | |

RF SPECIFICATIONS

| Control Signal 1 | 13V / No Tone |
|------------------|------------------|
| Control Signal 2 | 13V / 22kHz Tone |
| Control Signal 3 | 18V / No Tone |
| Control Signal 4 | 18V / 22kHz Tone |





Innovative Communication Solutions

Conversion Gain Max 65 dB 55 dB **Conversion Gain Min Conversion Gain Typ** 60 dB Gain Flatness (over Full Band) 5 dB p-p Input VSWR 2.5 : 1 max. **Output P1db** + 5 dBm min **Output VSWR** 2.5 : 1 max. Phase Noise 100khz Offset Max -95 dBc/Hz

ELECTRICAL SPECIFICATIONS

Current Consumption 350 mA

Power Requirements +12 to +24V DC

INTERFACE SPECIFICATIONS

IF Connector N-Connector

RF Input Connector WR-75 waveguide grooved

M and C SPECIFICATIONS

Led Indicators None

ENVIRONMENTAL SPECIFICATIONS

IP Rating IP 67

Temperature Operational -40°C to $+60^{\circ}\text{C}$ Temperature Storage-40 to $+80^{\circ}\text{C}$

PHYSICAL SPECIFICATIONS

Product Height42 mmProduct Length128 mmProduct Weight0.45 kgProduct Width60 mm

LOGISTICS SPECIFICATIONS

HS Code Country of Origin Ex Works ECCN Number Unit Package


8517690000 Made in the Republic of Richmond, BC, Canada EAR99 140 x 95 x 65 mm |
Korea

HOW TO ORDER






Innovative Communication Solutions

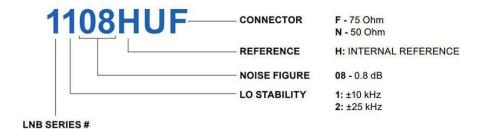

MECHANICAL DIAGRAMS

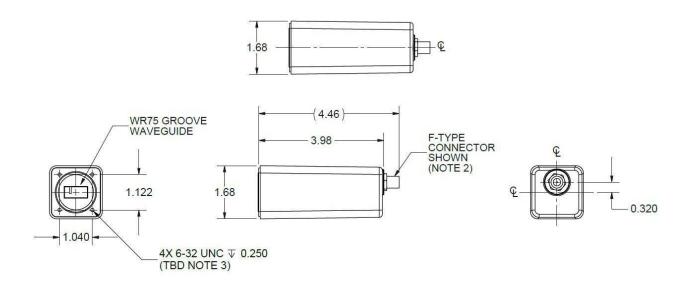



Norsat authorized distributor

Esatcom Inc.

3628 Francis Lewis Blvd.
Flushing, NY 11358
www.esatcom.com
Tel: 718.799.0084
Email: sales@esatcom.com