

BT-4439

Bias Tee BT-4400 Series

DC Connector: 3: SMA (Female) - 50 Ohm

10 MHz Injection: 9: TNC (Female)



KEY SPECIFICATIONS

Band	L-Band
Pass Band	950 - 2150 MHz

RF SPECIFICATIONS

10mhz Pass Band	10 - 100 MHz
Input VSWR	2.0 : 1 max.
Insertion Loss Max	1 dB
Output VSWR	2.0 : 1 max.

INTERFACE SPECIFICATIONS

10mhz Injection	TNC (Female)
DC Connector	SMA (Female) - 50 Ohm
Output Connector	N (Male) - 50 Ohm
RF Input Connector	N (Male) - 50 Ohm

ENVIRONMENTAL SPECIFICATIONS

IP Rating	IP 66
Temperature Operational	-30°C to +50°C
Temperature Storage	-40 to +70°C

PHYSICAL SPECIFICATIONS

Product Height	25 mm
Product Length	105 mm
Product Weight	0.17 kg




Product Width 55 mm

LOGISTICS SPECIFICATIONS

HS Code	Country of Origin	Ex Works	ECCN Number	Unit Package
8517690000	Made in Canada	Richmond, BC, Canada	EAR99	105 x 55 x 25 mm

HOW TO ORDER

BT-1188

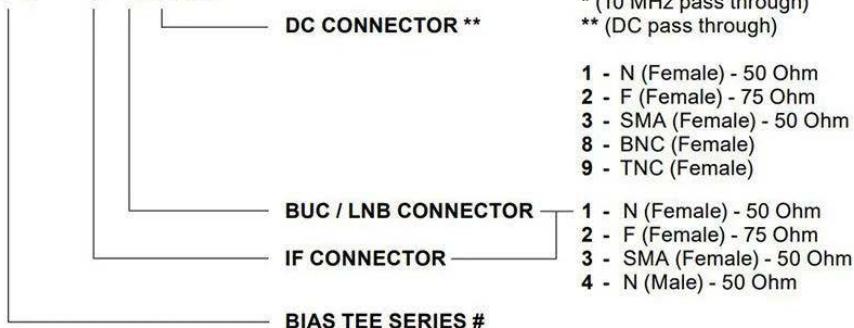


MECHANICAL DIAGRAMS




Norsat
International Inc.


Innovative Communication Solutions

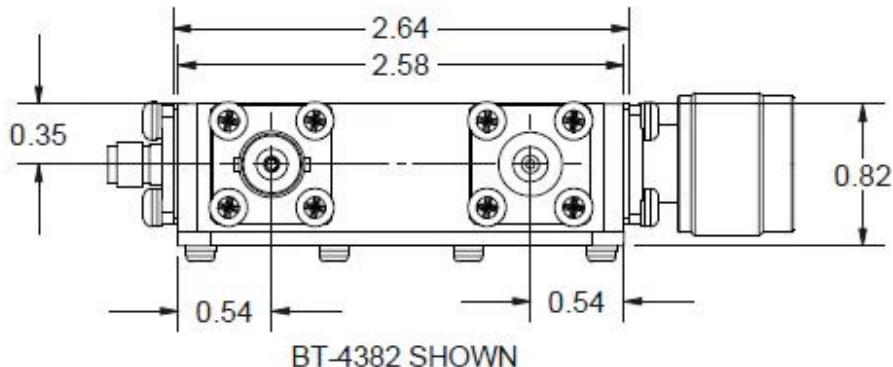


BT-4382 SHOWN

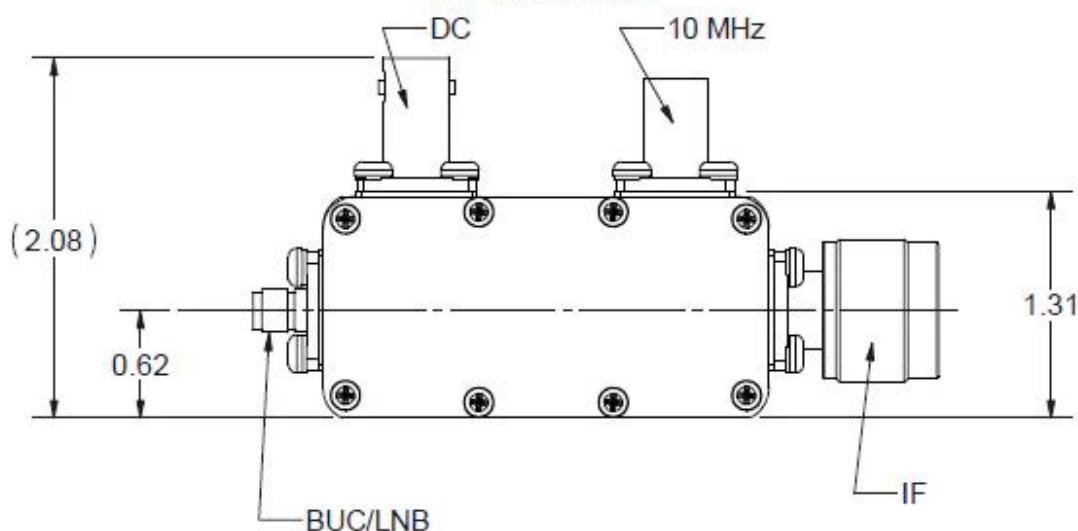

OPTIONAL MOUNTING PLATE

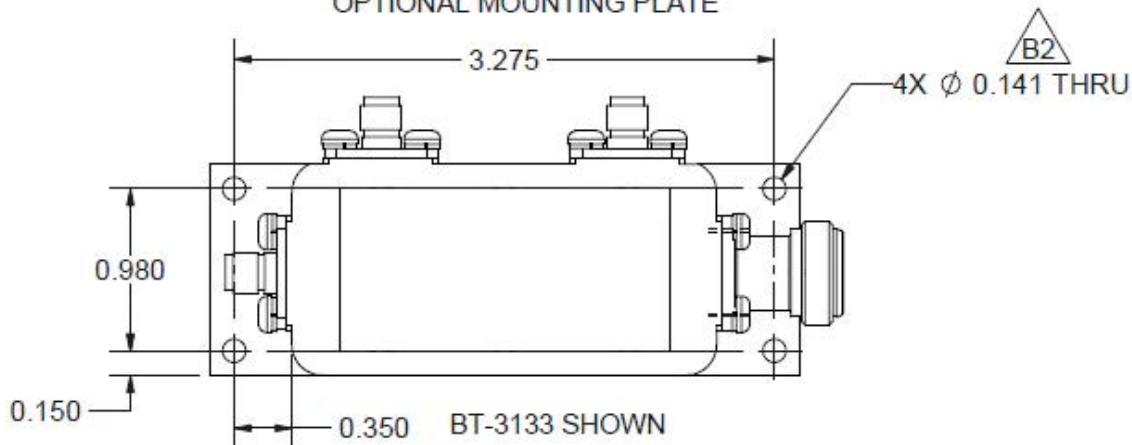

BT-3133 SHOWN

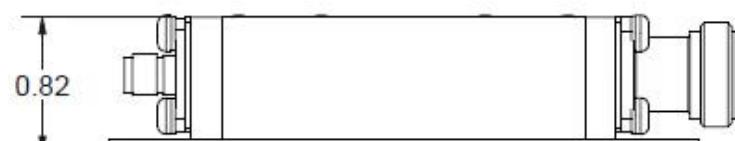

n | Norsat
International Inc.

ESATCOM
INC

Norsat authorized distributor

ESATCOM INC.
3628 Francis Lewis Blvd.
Flushing, NY 11358
www.esatcom.com
Tel: 718.799.0084
Email: sales@esatcom.com