

BT-1320

Bias Tee BT-1300 Series

DC Connector: 2: F (Female) - 75 Ohm

10 MHz Injection: 0: No Connector



KEY SPECIFICATIONS

Band	L-Band
Pass Band	950 - 2150 MHz

RF SPECIFICATIONS

Input VSWR	2.0 : 1 max.
Insertion Loss Max	1 dB
Output VSWR	2.0 : 1 max.

INTERFACE SPECIFICATIONS

10mhz Injection	No Connector
DC Connector	F (Female) - 75 Ohm
Output Connector	SMA (Female) - 50 Ohm
RF Input Connector	N (Female) - 50 Ohm

ENVIRONMENTAL SPECIFICATIONS

IP Rating	IP 66
Temperature Operational	-30°C to +50°C
Temperature Storage	-40 to +70°C

PHYSICAL SPECIFICATIONS

Product Height	25 mm
Product Length	105 mm
Product Weight	0.17 kg
Product Width	55 mm




LOGISTICS SPECIFICATIONS

HS Code	Country of Origin	Ex Works	ECCN Number	Unit Package
8517690000	Made in Canada	Richmond, BC, Canada	EAR99	105 x 55 x 25 mm

HOW TO ORDER

BT-1188


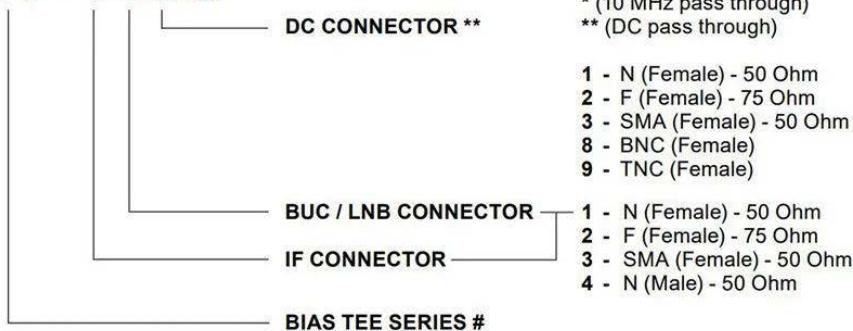


MECHANICAL DIAGRAMS




Norsat
International Inc.

Innovative Communication Solutions

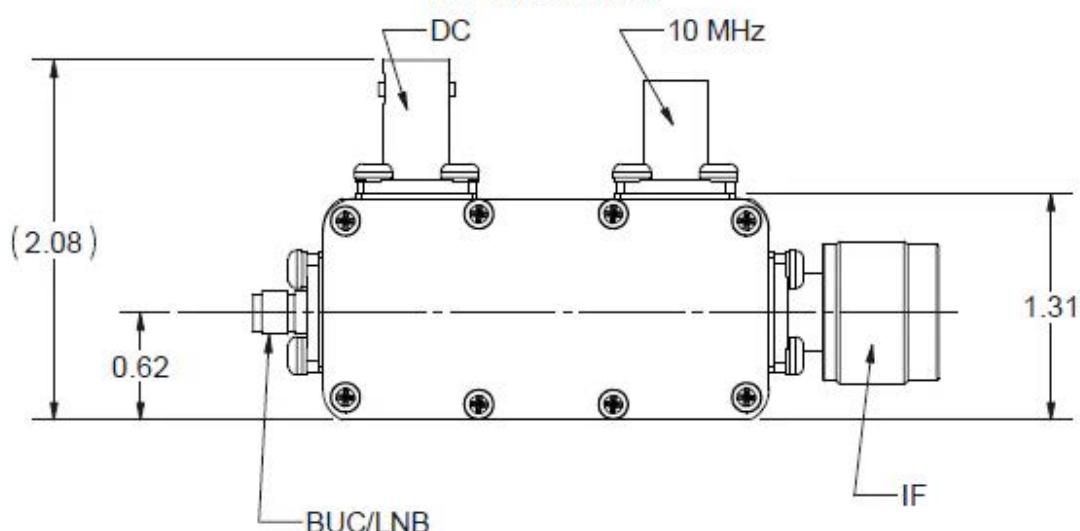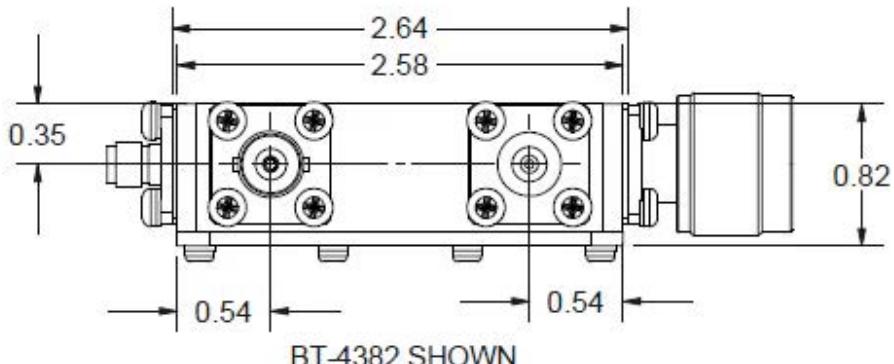

OPTIONAL MOUNTING PLATE

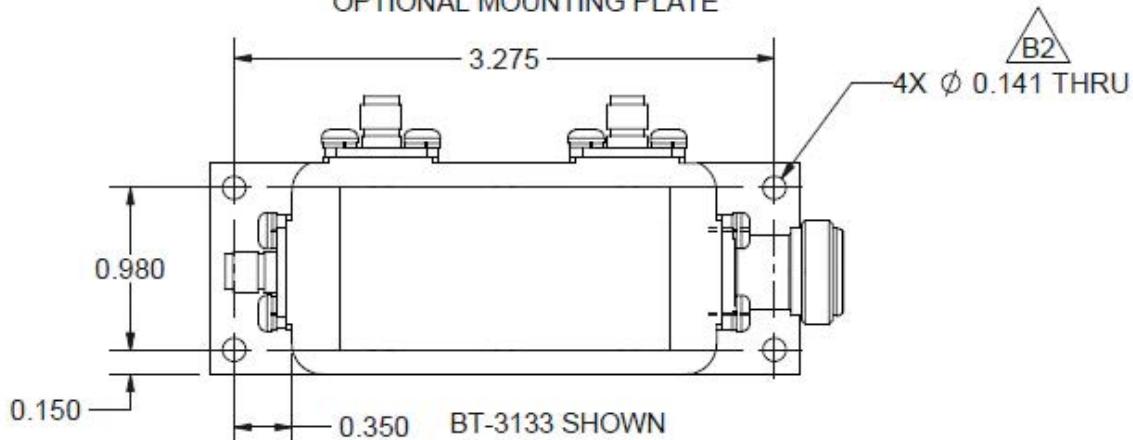

Norsat
International Inc.

ESATCOM
INC.

Norsat authorized distributor

ESATCOM INC.

3628 Francis Lewis Blvd.
Flushing, NY 11358
www.esatcom.com
Tel: 718.799.0084
Email: sales@esatcom.com