



## BT-1280

### Bias Tee BT-1200 Series

DC Connector: 8: BNC (Female)

10 MHz Injection: 0: No Connector



### KEY SPECIFICATIONS

Band	L-Band
Pass Band	950 - 1450 MHz

### RF SPECIFICATIONS

Input VSWR	2.0 : 1 max.
Insertion Loss Max	7 dB
Output VSWR	2.0 : 1 max.

### INTERFACE SPECIFICATIONS

10mhz Injection	No Connector
DC Connector	BNC (Female)
Output Connector	F (Female) - 75 Ohm
RF Input Connector	N (Female) - 50 Ohm

### ENVIRONMENTAL SPECIFICATIONS

IP Rating	IP 66
Temperature Operational	-30°C to +50°C
Temperature Storage	-40 to +70°C

### PHYSICAL SPECIFICATIONS


Product Height	25 mm
Product Length	105 mm
Product Weight	0.17 kg
Product Width	55 mm



### LOGISTICS SPECIFICATIONS

HS Code	Country of Origin	Ex Works	ECCN Number	Unit Package
8517690000	Made in Canada	Richmond, BC, Canada	EAR99	105 x 55 x 25 mm

### HOW TO ORDER

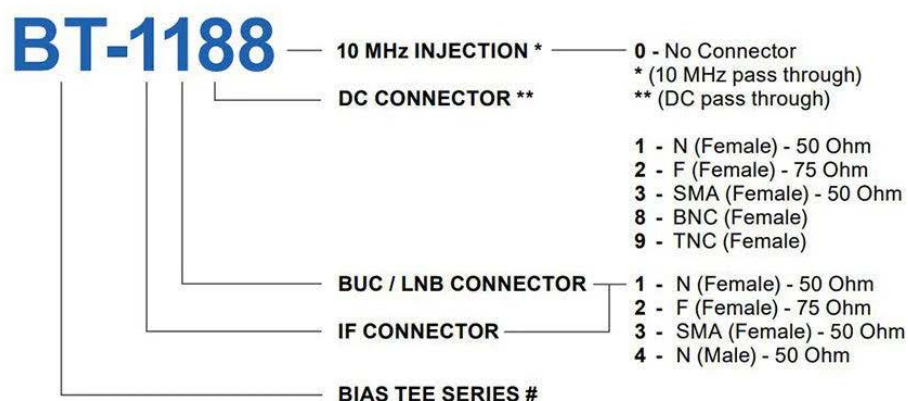


### MECHANICAL DIAGRAMS



Norsat  
International Inc.

Innovative Communication Solutions

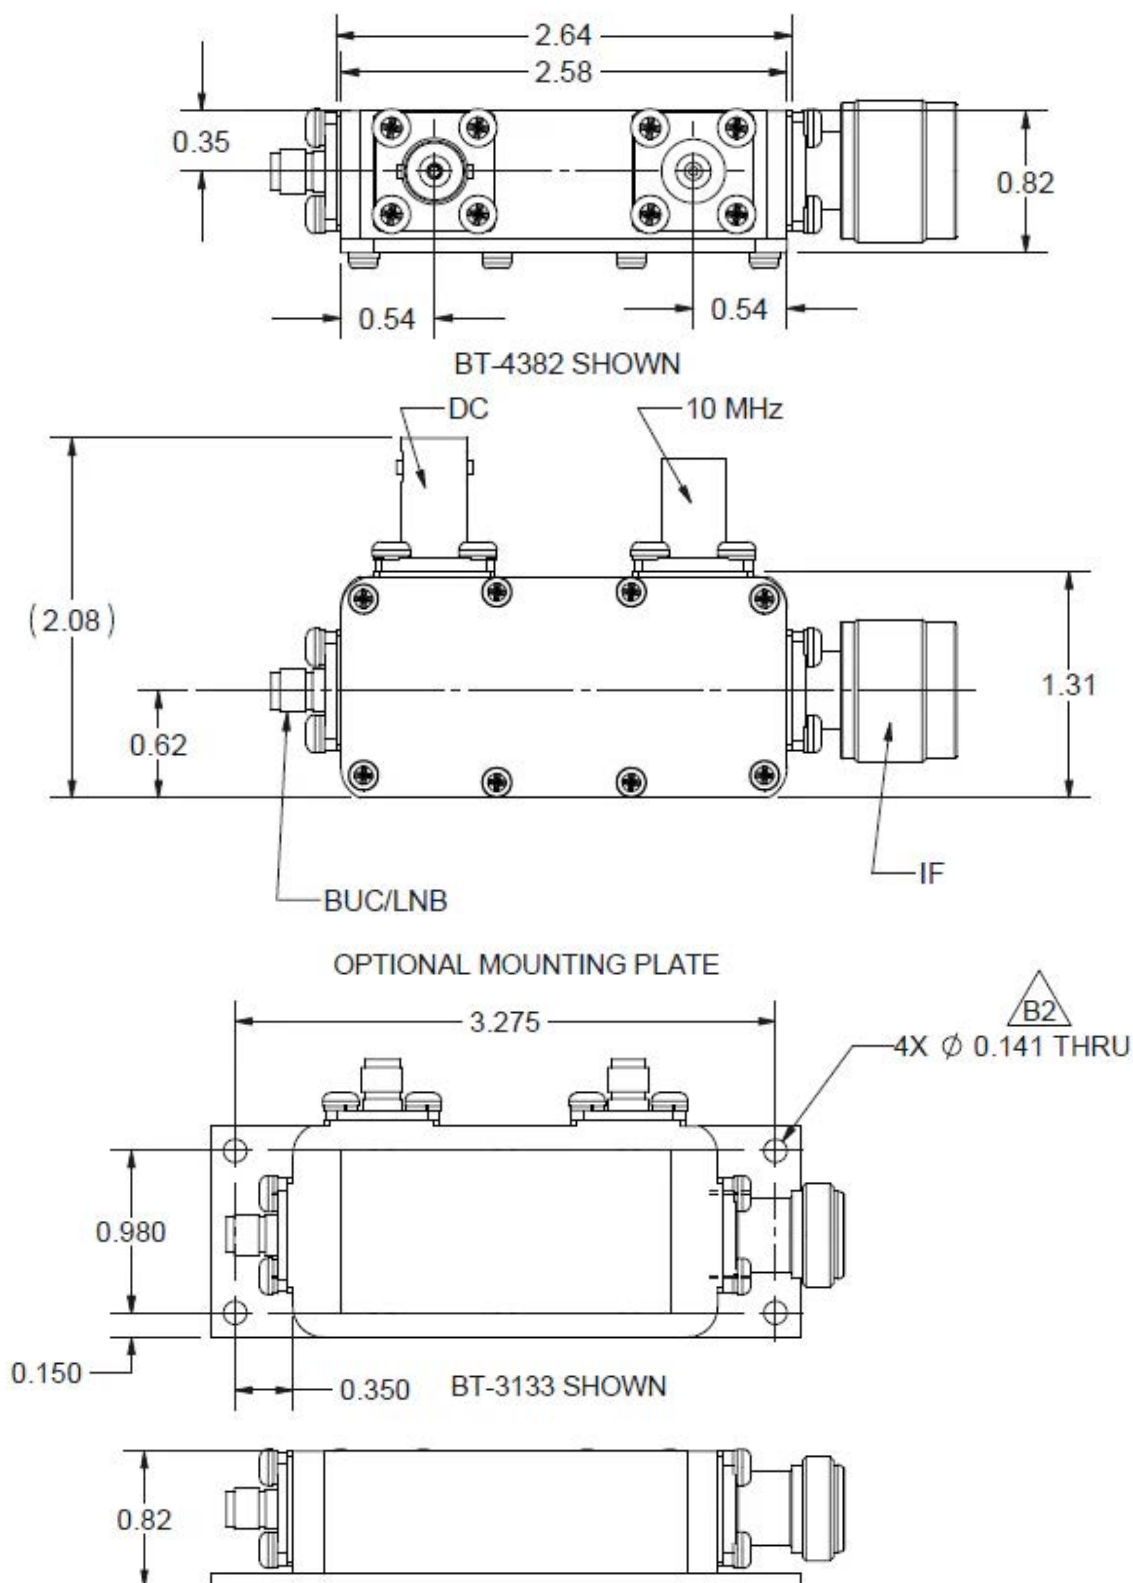

Norsat  
International Inc.

ESATCOM  
INC

Norsat authorized distributor

ESATCOM INC.

3628 Francis Lewis Blvd.

Flushing, NY 11358

[www.esatcom.com](http://www.esatcom.com)

Tel: 718.799.0084

Email: [sales@esatcom.com](mailto:sales@esatcom.com)