


P7001

Fully synthesised, L-band to IF, Down Converter

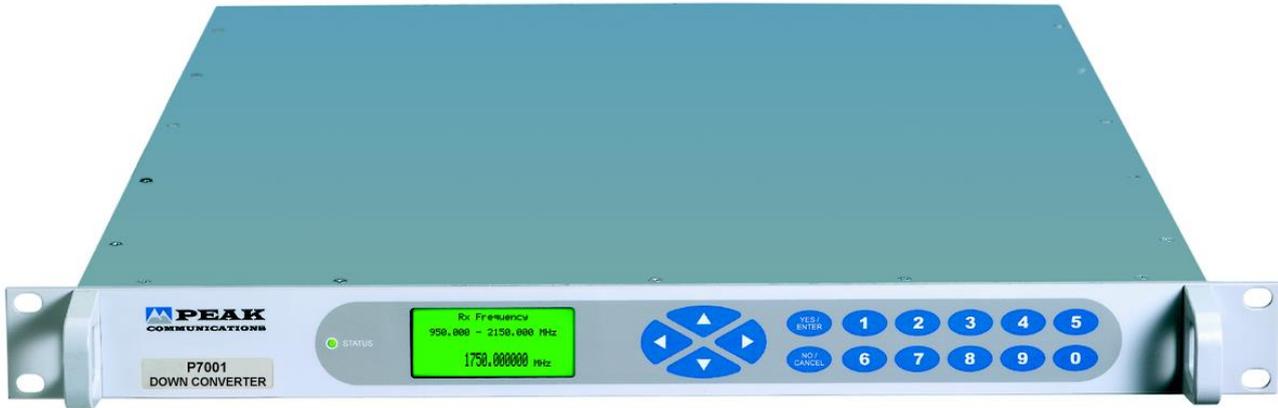

The **P7001** is a next generation fully synthesised L-Band down converter which provides a low-cost solution for systems requiring an IF interface at $70\text{MHz} \pm 18\text{MHz}$, $140\text{MHz} \pm 36\text{MHz}$ or switchable between 70 & 140MHz.

For redundancy the **P7001** uses a simple CANBUS® interface and has an integral redundancy controller for 1+1 & 2+1 operation (for use with external **R1000L**, **R2000L** switch units), for N+1 systems a separate stand-alone control and switch unit is provided (**RCU1000 series**).

Note; separate stand-alone control and switching units can also be provided for 1+1 & 2+1 systems, please consult the factory.

The **P7000 series** of converters are designed to meet the phase noise, spurious, level and frequency stability requirements of Intelsat IBS/ Eutelsat SMS specifications and is compliant with IESS308/ 309. The product is suitable for high order modulation schemes and both very high & low data rates associated with digital TV signals. The unit incorporates a graphics display module, membrane keyboard and features a clear and intuitive control and configuration menu fully utilising the unique graphics display.

The unit has a highly stable internal reference source and will automatically detect and lock to an external 10MHz signal, when applied.

Peak Features

-  Compliant with IESS308/ 309 requirements
-  Suitable for use with latest high order modulation schemes in excess of 100Mbits/sec
-  Integral 1+1 & 2+1 CANBUS® redundancy control & N+1 switch systems available
-  Aux DC and 10MHz reference outputs for Block Converters
-  Software selectable spectrum inversion
-  External alarm monitoring for Block Converters
-  Software trimming of internal 10MHz reference
-  L-band input monitoring point



P7001 – Typical Specification

L-band Input

Frequency	950-1750MHz
Option 7;	950-2150MHz
Connection	N-type (f), 50Ω

IF Output

Frequency	70 ±18MHz
Option 1b;	140 ±36MHz
Option 1d;	switchable between 70 ±18MHz & 140MHz ±36MHz
Connection	BNC (f), 50Ω
Option 3b;	BNC (f), 75Ω
Spectrum sense	Invert user selectable (via front panel & remote)

Transfer Characteristics

Conversion gain	+30dB ±1dB
Attenuation	0 to 30dB, stepped 0.1dB
1 dB GCP	Input -10dBm, output +15dBm
Gain stability	±0.5dB from 0 to 40°C ±0.1dB per week (constant temp.)
Gain flatness	±0.5dB full band (±1.5dB 950-2150MHz option) ±0.5dB across any 36MHz in band
Synth resolution	1Hz

RF Performance

Phase noise	-65dBc/Hz at 10Hz -75dBc/Hz at 100Hz -83dBc/Hz at 1kHz -85dBc/Hz at 10kHz -100dBc/Hz at 100kHz -115dBc/Hz at 1MHz
Harmonics Spurious	Better than -50dBc (at input -50dBm, gain 30dB) <-60dBm (in band non-carrier related) <-60dBc (in band carrier related)
Group delay	Linear 0.025ns/MHz Ripple 1ns p-p Parabolic 0.015ns/MHz ²
Noise figure	20dB nominal at maximum gain

Block Down Converter/ LNB Drive

Output reference	10MHz at 0dBm nominal
DC supply	+22.5 volts regulated at 0.65 amps
Connection	Fed on L-band cable
Control	Switchable from front panel

L-Band Monitor

Connection	BNC (f), 50Ω
Level	-20dBc ±3dB
Option 11f;	IF monitor, replacing the standard L-Band monitor

External Reference Input (with automatic detection & locking)

Frequency	Factory selectable 5 or 10MHz
Connector	BNC (f), 50Ω
Level	0dBm ±5dB
Phase Noise	to be better than 50dBc/Hz of output phase noise

Internal Back-up Reference

Frequency	10MHz
Adjustment	±0.45ppm, stepped 0.01ppm

Standard Stability

Allan deviation	<5 x 10 ⁻¹² over 1s
Ageing	<±3 x 10 ⁻¹⁰ /day, <±3 x 10 ⁻⁹ /month, <±3 x 10 ⁻⁸ /year
Temp stability	<±2 x 10 ⁻⁹ over operating range

High Stability (Option 8)

Allan deviation	<2 x 10 ⁻¹² over 1s
Ageing	<±2 x 10 ⁻¹⁰ /day, <±2 x 10 ⁻⁹ /month, <±2 x 10 ⁻⁸ /year
Temp stability	<±1.5 x 10 ⁻⁹ over operating range

Mechanical

Width	19", standard rack mountable
Height	1U (1.75")
Depth	534mm (21"), plus connectors
Option 4b;	Short chassis 400mm (15.7"), plus connectors (offered with 0.5dB step attenuator & +10dBm output P1dBGCP)
Construction	Stainless Steel chassis
Weight	Approx. 9kgs (20lbs)
Option 4;	Lightweight Aluminium chassis 7.5kg (15.5lb)

Environmental

Operating temp	-10°C to +50°C
EMC	ETSI EN 301 489-1: V2.2.1 & ETSI EN 300 673: V1.2.1
Safety	IEC/EN 62368-1:2014 (second edition)

Power supply

Voltage	90-264VAC
Frequency	47-63Hz
Power	35 Watts, plus external LNB power (if connected)
Option 17;	Redundant PSU; provides a 1+1 redundant PSU configuration with separate prime power inputs

Control System


Remote control	RS232/ 485 port
Option 9;	Ethernet; embedded web server & SNMP network management support
Redundancy	CANBUS® interface for N+1 system
Alarms	In-built 1+1 & 2+1 controller LO lock failure PSU failure External alarm inputs Summary failure relay (form C)

Options

- 1b) 140MHz IF output
- 1d) IF switchable between 70MHz and 140MHz output
- 2) Custom front panel logo and colour
- 3b) 75Ω IF output
- 4) Lightweight Aluminium chassis
- 4b) Short chassis (Aluminium)
- 6b) L-band fibre optic input (please refer to factory)
- 7) Wide band D/C input 950 to 2150MHz
- 8) High stability internal reference option
- 9) Ethernet interface with embedded web server & SNMP
- 11f) IF monitor instead of standard L-Band monitor port
- 17) Redundant power supplies

Notes; other 'P7000 series' options do not apply to these products. The addition of Options can modify the typical specification, for details please consult the factory.

Rear panel view (sample)

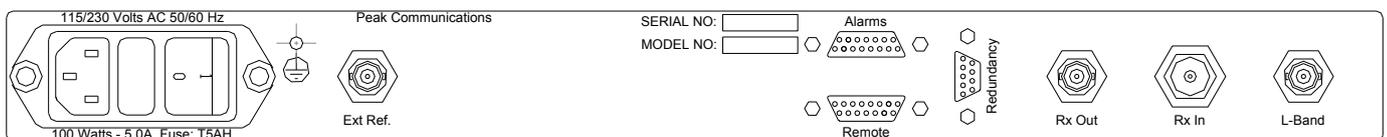

ESATCOM INC.

3628 Francis Lewis Blvd.

Flushing, NY 11358

www.esatcom.com

Tel: 718.799.0084

Email: sales@esatcom.com