

D400 and D600 series

BUC/ BDC/ LNB driver units



D401, D601	single-channel units
D402, D602	dual-channel units
D403, D603	triple-channel units
D404, D604	quad-channel units

The **D400** & **D600** series driver units are available in up to quad-channel in 1RU and are configurable to customer specific requirements. They are designed to supply DC power and/ or a reference frequency to a remote mounted block down converter (BDC), low noise block (LNB) or block up converter (BUC). These units are ideal in the situation where the connecting modulator cannot supply a suitable external DC supply or when the modulator reference frequency is either unavailable or has insufficient stability for the application. The driver units are 19-inch rack mounted and are powered from a wide input range AC supply.

The **D400** series units are designed for use with **BDC's or LNB's**. These units can supply up to 24VDC at typically 500mA and can incorporate a locking reference frequency of typically 10MHz. The supply to the BDC/ LNB is a composite of DC, reference and the received L-Band signal. The output of the D400 unit is the received L-Band signal.

The **D600** series units are designed for use with **BUC's**. These units can supply up to 24VDC at typically 500mA and can incorporate a locking reference frequency of typically 10MHz. The input of the D600 unit is the L-Band signal to be transmitted. The supply to the BUC is a composite of DC, reference and the L-Band signal to be transmitted.

Peak Features

-  Available in up to 4-channels in 1RU
-  Optional high stability reference system
-  Optional DC drive of typically 13-24VDC, dual range 'voltage switching' available
-  Optional redundant power supplies with dual mains input
-  Full alarm monitoring



D400, D600 series – Typical specification;

L-Band interface specification

L-Band frequency	900 - 2150MHz
L-Band connection	N-type (f), 50Ohm
Insertion loss	2dB

Note; for amplification options please consult the factory (Option 6)
Maximum input +16dBm

DC drive generation (Option 1)

Drive	Fed to BUC/BDC/LNB on L-Band co-axial cable
Option 1a;	Fed via a separate, 9-way, D-Type connector
Voltage	+13 to +24VDC (factory settable, please specify on order)
Current	750mA typ. (for higher please consult the factory)
Option 1b;	+27VDC @ 1A, suitable for multi-range/ band BUC & BDC units
Option 1c;	Switched voltage +13VDC/ +18VDC fed via L-Band for dual range LNB's
Notes; Opt1c includes front panel +13V/off/+18V toggle switch. Rear panel DIP and front panel key switches available.	
Option 1d;	+24VDC @ 2.5A, suitable for higher power BUC drive.
Option 1e;	+48VDC @ 4A, suitable for higher power BUC drive.

Reference drive generation (Option 2)

Drive	10MHz fed to BUC/BDC/LNB on L-Band co-axial cable
Note; for other frequencies (5, 50 & 100MHz), please consult factory	
Power	0dBm +/-3dB
Stability	<5x10 ⁻¹⁰ over 1s, <5x10 ⁻⁹ per day
Ageing	<5 x 10 ⁻⁷ per year
Temp stability	<5 x 10 ⁻⁸ over 0 to 50°C

High stability (Option 3)

Stability	<2x10 ⁻¹² over 1s, <2x10 ⁻¹⁰ per day
Ageing	<2 x 10 ⁻⁸ per year
Temp stability	<2 x 10 ⁻⁹ over 0 to 50°C

External reference input (Option 4)

with automatic detection

Note; only available with option 2

Frequency	10MHz (5MHz factory settable)
Level	0dBm ±3dB
Connector	SMA (f), 50Ohm
Option 4b;	Input via L-Band (from Modem)

Mechanical

Width	19" standard rack mountable
Height	1U (1.75")
Depth	250mm (10"), plus connectors
Construction	Aluminium chassis
Weight	4kgs (8.8lbs)

Environmental

Operating temp	0°C to +50°C
EMC	EN 55022, part B & EN 50082-1
Safety	EN 60950

Power supply (2off redundant with Option 7)

Voltage	90-264VAC
Frequency	47-63Hz
Total power	20 Watts typ., depending upon DC drive option
Redundancy	Provides a redundant power supply configuration with separate prime power inputs

Control system interface


Alarms	PSU failure LO lock failure (with Option 2)
--------	--

Options

- 1) +17 to +24VDC@750mA drive on L-Band
- 1a) DC drive via separate connector
- 1b) +27VDC@1A drive on L-Band
- 1c) +13/ +18VDC switched drive on L-Band, for dual range LNB's
- 1d) +24VDC@2.5A drive on L-Band
- 1e) +48VDC@4A drive on L-Band
- 2) Reference drive generator (10MHz) on L-Band
- 3) High stability internal reference generator
- 4) External reference input via separate connection
- 4b) External reference input via L-Band (from Modem)
- 6) L-Band amplification (please consult the factory, stating the requirement)
- 7) Redundant power supplies

Note; the addition of options can modify the typical specification, for details please consult the factory

Rear panel view (typical showing quad channel version with redundant PSU's)

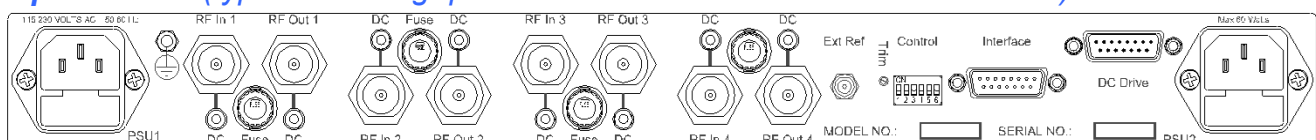

ESATCOM INC.

3628 Francis Lewis Blvd.

Flushing, NY 11358

www.esatcom.com

Tel: 718.799.0084

Email: sales@esatcom.com