

OSC Series

Remote Mounted Co-Axial & Waveguide Switch Control Units



The **OSC series** remote mounted control units provide a fully outdoor solution for driving external co-axial & waveguide switches in Satcom and other applications. Peak are happy to provide suitably weatherproofed new switches, or the units can drive & control existing 'legacy infrastructure' switches.

Single or dual switch controls are available with either independent or simultaneous actuation.

The **OSC series** units are designed for remote control via Ethernet, but are also offered with basic local controls. Remote control includes an embedded web-browser with SNMP network management support.

Peak can offer dedicated indoor rack mounted user interface units (Ethernet based), see **FPC100** and outdoor AC/DC power supply units, see **OPS series**.

The flexibility of the design allows for customization, so please consult the factory if the features that you require are not shown on this data sheet. Peak can supply external switches and cabling, for more details please consult the factory.

Peak Features

-  External waveguide or co-axial switch control
-  Comprehensive remote control, plus local manual controls and indicators
-  Minimises capex through reduced cross-site control and drive cable costs
-  Improves electromagnetic antenna isolation
-  Compatible with most makes of co-axial and waveguide switches



OSC Series Units – Typical Specification

Code S; single switch drive

Code D; dual switch drive, with independent or simultaneous* operation (user configurable)

*Note**: For simultaneous operation a small delay between S1 & S2 actuation can be expected, duration will depend upon switch type & rating (please consult factory for details).

External switch interface

Peak can supply switches etc. (please consult factory for details).

Switch Voltage

Code 2; +12VDC

Code 4; +24VDC

Switch type Pulsed, latching with indicators, positive or negative (user configurable)

Note: negative pulse versions can be configured for use without tell-back indicators.

Connection Circular multi-pole, weatherproof (mating part supplied)

Mechanical

Dimensions

290 x 230 x 95mm (11.4 x 9.1 x 3.7inch)

Construction

Die-cast Aluminium, weatherproof, IP66 rated

Weight

Approx. 4kgs (9lbs)

Environmental

Operating temp

-10°C to +50°C (less solar gain)

Option 13; -40°C to +50°C (less solar gain)

Humidity

0-100% condensing

EMC

EN55022, part B & EN50082-1

Safety

EN60950

Power Supply (dual input)

Voltage

Note: Applied input Voltage must be within the switch voltage range (12 or 24V), allowing for any cable loss (please contact Peak for details or advice).

Code 2; +12 to +18VDC

Code 4; +24 to +27VDC

Power

20 Watts nom (option dependent)

Connection

Multi-pin circular, weatherproof (mating part supplied)

Control System

Alarms

LED indicator & summary failure relay (form C)

Connection

See power supply section

Local control

Weatherproof switches with indicators for local /remote and switch position selection

Remote control

Ethernet; embedded web server & SNMP network management support

Connection

RJ45, weatherproof (mating weatherproofing parts supplied)

Options

- 1) Cable assembly (between OSC unit and external switch)
- 13) Low temperature operation to -40°C
- 16) Factory pre-set IP address

Ordering Code

Switch voltage:

+12VDC = 2

+24VDC = 4


OSC - 4 - D

Switch drives:

Single = S

Dual = D

Connection Panels (dual switch control unit shown)

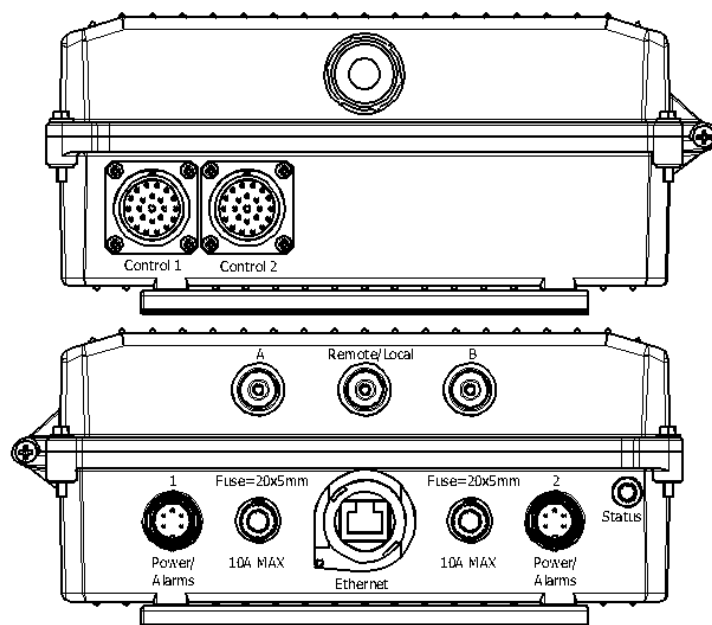

PEAK
COMMUNICATIONS

ESATCOM
INC

ESATCOM INC.

3628 Francis Lewis Blvd.

Flushing, NY 11358

www.esatcom.com

Tel: 718.799.0084

Email: sales@esatcom.com