

DBU200(Ka)

Dual, 'Hot-swap', Ka-Band Block Converter with optional 1+1 Redundancy



The 19-inch 1U rack mounted **DBU200(Ka)** chassis unit is designed to accept any mix of two of the converter modules shown below. Modules can be inserted/ replaced in the **DBU200(Ka)** unit from the rear without the need to remove power or disturb the other channel in any way.

The **DBU200(Ka)** chassis units are mains powered (redundant power supplies as standard) and are constructed of high grade components to give the ultimate stability, ripple and phase noise performance.

The **DBU200(Ka)** unit is available with optional integral 1+1 redundancy switching and control for use when two identical modules are used.

The unit has a highly stable internal reference source and will automatically detect and lock to an external 10MHz signal, when applied.

High Grade Converter Modules;

MBU1970	L-Band to Ka-Band (19.7-20.2GHz) BUC Module
MBU2750	L-Band to Ka-Band (27.5-28.5GHz) BUC Module
MBU2830	L-Band to Ka-Band (28.3-29.1GHz) BUC Module
MBU2850	L-Band to Ka-Band (28.5-29.5GHz) BUC Module
MBU2900	L-Band to Ka-Band (29.0-30.0GHz) BUC Module
MBU2960	L-Band to Ka-Band (29.6-30.2GHz) BUC Module
MBU3100	L-Band to Ka-Band (30.0-31.0GHz) BUC Module

MBD1820	Ka-Band (18.2-19.2GHz) to L-Band BDC Module
MBD1890	Ka-Band (18.9-19.6GHz) to L-Band BDC Module
MBD1920	Ka-Band (19.2-20.2GHz) to L-Band BDC Module
MBD1950	Ka-Band (19.5-20.2GHz) to L-Band BDC Module
MBD1970	Ka-Band (19.7-20.2GHz) to L-Band BDC Module
MBD2020	Ka-Band (20.2-21.2GHz) to L-Band BDC Module
MBD2140	Ka-Band (21.4-22.0GHz) to L-Band BDC Module
MBD2950	Ka-Band (29.5-30.0GHz) to L-Band BDC Module
MBD2750	Ka-Band (27.5-28.5GHz) to L-Band BDC Module
MBD2830	Ka-Band (28.3-29.1GHz) to L-Band BDC Module
MBD2850	Ka-Band (28.5-29.5GHz) to L-Band BDC Module
MBD2900	Ka-Band (29.0-30.0GHz) to L-Band BDC Module
MBD3100	Ka-Band (31.0-31.0GHz) to L-Band BDC Module

If the converter module that you require is not shown above, please contact us with your frequency requirements and we will be pleased to consider adding it to our range.

Peak Features

-  High stability, low ripple and excellent phase noise
-  10MHz external reference fitted as standard with automatic internal reference back-up
-  Full Alarm monitoring
-  Redundant power supplies with dual mains input
-  Integral 1+1 redundancy option for module switching
-  Fully compatible with **RCU series** external redundancy units for full chassis switching



DBU200(Ka) Chassis - Typical Specification

External Reference Input (with automatic detection)

Frequency	10MHz (5MHz factory settable)
Level	0dBm $\pm$ 5dB
Connector	BNC (f), 50 Ω
Locking delay	<2 min to stabilise from cold

Internal Back-up Reference Stability

Allan deviation	5×10^{-11} over 1s
Ageing	$<5 \times 10^{-9}$ per day, $<5 \times 10^{-7}$ per year
Temp stability	$<5 \times 10^{-8}$ over 0 to 50°C

Mechanical

Width	19" standard rack mountable
Height	1U (1.75")
Depth	400mm (15.7"), plus connectors
Construction	Aluminium chassis
Weight	4.5kgs (10lbs)

Environmental

Operating temp	0°C to +50°C
EMC	EN 55022-part B & EN 50082-1
Safety	EN 60950

Power Supply (2off in redundant configuration)

Voltage	90-264VAC
Option 10;	48VDC
Frequency	47-63Hz
Total power	50 Watts max.

Control System Interface

Local interface	Front panel key switches (for option 6b)
Remote control	RS232/ RS485 port
Option 9;	Ethernet; embedded web server & SNMP network management support.
Alarms	LO lock failure PSU failure Amplifier failure

Integral 1+1 'Module' Redundancy (Option 6b)

Switch type	Rated to 31GHz
Switching speed	<150ms from fault to switch completion
Switch isolation	>50dB typical input to output
Option 13;	'chassis mute' facility with 70dB isolation
RF cables	Includes high grade rear panel links.

Notes: The connection to the internal redundancy circuitry is made via RF links on the rear panel, this allows for by-pass wiring should the need arise. High grade co-axial linking cables are provided.

DBU200(Ka) Options

- 6b) Integral 1+1 redundancy module switching
- 9) Ethernet interface with embedded web server & SNMP, replaces RS232/485 port
- 10) 48VDC prime power supply
- 13) Output 'chassis mute' facility (only available with option 6b)

Note: The addition of options can modify the typical specification, for details please consult the factory

MBU/MBD Modules - Typical Specification

SHF Interface

Connector	K-Type (f), 50 Ω or 2.92mm (f)
Return loss	18dB

L-Band Interface

Connector	SMA (f), 50 Ω
Option 1b;	N-Type (f), 50 Ω
Return loss	18dB

Transfer Characteristics (MBU)

Conversion gain	17dB $\pm$ 1dB at band centre
1dB output GCP	+8dBm
Gain stability	$\pm$ 0.75dB from 0 to 50°C
Gain flatness	$\pm$ 1dB full band ($\pm$ 1.5dB for bandwidths $\geq$ 800MHz) $\pm$ 0.5dB across any 40MHz in-band

Transfer Characteristics (MBD)

Conversion gain	30dB $\pm$ 1dB at band centre
RF input power	-20dBm max
1dB output GCP	+8dBm
Gain stability	$\pm$ 1dB from 0 to 50°C
Gain flatness	$\pm$ 1dB full band ($\pm$ 1.5dB for bandwidths $\geq$ 800MHz) $\pm$ 0.5dB across any 40MHz in-band

RF Performance

LO Phase noise (typ. with good phase noise ext. ref.)

offset	MBU	MBD
@10Hz	-45dBc/Hz	-35dBc/Hz
@100Hz	-65dBc/Hz	-70dBc/Hz
@1kHz	-95dBc/Hz	-90dBc/Hz
@10kHz	-100dBc/Hz	-95dBc/Hz
@100kHz	-100dBc/Hz	-100dBc/Hz
@1MHz	-115dBc/Hz	-115dBc/Hz

Spurious (MBU)	<-70dBm (in band non-carrier related) <-65dBc (in band carrier related)
Spurious (MBD)	<-65dBm (in band non-carrier related) <-60dBc (in band carrier related)

Note: 2nd harmonic of IF (2xIF) at -50dBc@0dBm output, if in-band


LO leakage	-70dBm (always out of band)
3rd order intercept	>+18dBm (standard unit)

MBU/MBD Options

- 1b) N-Type L-Band connector

Note: The addition of options can modify the typical specification, for details please consult the factory

Rear panel view (sample, shown with 1+1 redundancy option fitted)

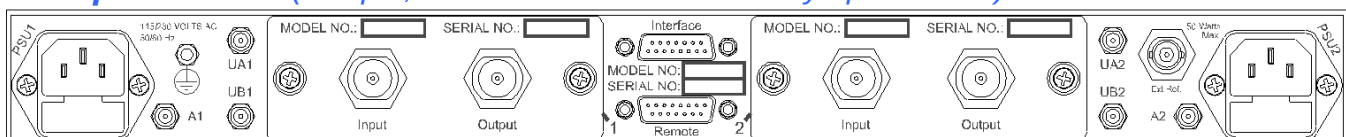

ESATCOM INC.

3628 Francis Lewis Blvd.

Flushing, NY 11358

www.esatcom.com

Tel: 718.799.0084

Email: sales@esatcom.com