
1PPS to 1MPPS, and IRIG-B (DCLS TTL) GENUS StingRay RF over Fibre module

SRY-G1S-TY-175-xxxx is a low phase noise optical transmit module that converts 1PPS & IRIG DCLS TTL input to 1310nm optical output for timing applications for use in Genus 1U chassis, occupying 1 module slot. It is available with FC/APC or SC/APC optical connectors and RF port options of SMA or BNC in 50 ohm. This unit is designed to work with SRY-G1S-RX-176-xxxx and SRY-G2S-RY-324-xxxxxx for links up to 10km.

Module

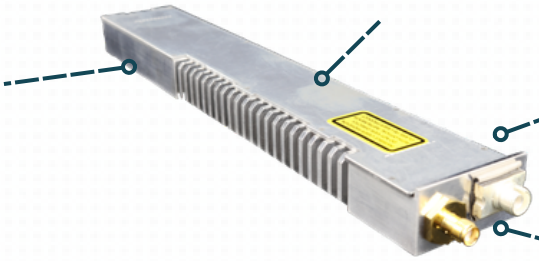

Compact
Each module occupies 1 slot in GENUS chassis

Tx & Rx
module options for transmit and receive chains up to 10km

1PPS to 1MPPS and IRIG-B
signal type

Hot Swap & replaceable
RF module

Chassis

Resilience
Dual redundant hot swap power supplies; field replaceable CPU and HMI

Local Control & Monitoring
Front panel capacative HMI touchscreen

Secure Protocols
with SNMPv3 and HTTPS

Indoor & outdoor
1U indoor and compact ODU chassis options available





Configurable
Choose from a mixture of fibre modules with different operating frequencies, or house alongside other RF functions


10MHz Reference
Optional field-replaceable internal 10MHz reference and external reference inject port with auto detection

Remote Control & Monitoring
via RJ45 Ethernet port with SNMP and web browser interface

RF Parameters		
Model Numbers	SRY-G1S-TY-175-xxxxxx	
Input Signal	1PPS to 1MPPS and IRIG DCLS (50 Ohm TTL)	
Input port	50Ω SMA, BNC.	
Input level	5V peak nominal (TTL)	
Duty cycle	0 to 100%	
Rise/Fall Time	<20ns (Measured between 10% low and 90% high thresholds.)	
Jitter	<200ps RMS	
Optical Parameters		
Optical Wavelength	1310nm (Other wavelengths are available)	
Optical power output	+6 dBm Typical	
Optical Connectors	SC/APC, FC/APC (Single mode fibre)	
Non-RF Parameters		
Module swap	Hot swap	
Power consumption	< 5W	
MTBF	>200,000 hours	
Environmental conditions		
Operating Temperature	-20 to +55°C	
Storage Temperature	-40 to +85°C	
Location	Indoor use (Outdoor use as part of ETL ODU only)	
Humidity	20 to 90% non-condensing (Relative Humidity)	
Altitude	10,000 feet AMSL	
Control, Monitoring and Alarms		
Control	Local and Remote	Local front panel control. See chasis spec. Remote control via Ethernet. 10/100Base T. TCP/IP, SNMP, web browser
Temperature monitors	Each module monitored (All are independently monitored and reported)	
Monitoring includes	Input TTL Frequency (in each module)	
Physical Dimensions		
Weight / Dimensions	0.2 Kg typical / 19 x 38 x 253 mm (see figure 1)	

Note-1: Typical parameters are guide figures and measured data may deviate from the quoted figures. ETL endeavours to exceed the quoted typical parameters where practically possible.
Note-2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage. For reliable long term operation do not exceed the parameters given in above.
Note-3: The spec table is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.

ETL Systems Ltd, Coldwell Radio Station,
Madley, Hereford, England HR2 9NE
info@etlsystems.com
+44 (0)1981 259020

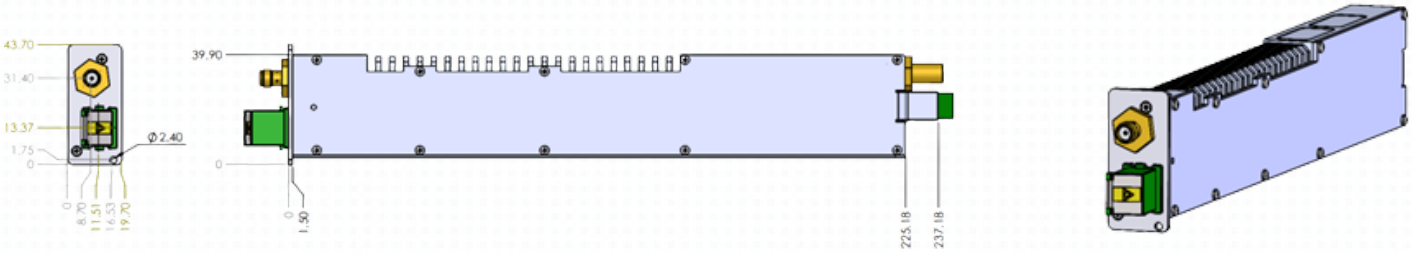

Part number configurator: SRY-G1S-TY-175-XXXX

Fiber Connector options:
SA - SC/APC
FA - FC/APC

S5 - SMA 50 ohm
B5 - BNC 50 ohm