

Outdoor 250W AC/DC Power Supply Unit (PSU)

(Output Power: 250 W, Output Voltage: +48 VDC)

Model No. NJZ1289

Specifications
Rev.01 May 28, 2015

Copyright 2015

New Japan Radio Co., Ltd.
Microwave Components Division

-Notice of Proprietary Information-

This documents and its contents are proprietary to New Japan Radio Co., Ltd.
This publication and its contents may not be reproduced or distributed for any
other purpose without the written permission of New Japan Radio Co., Ltd.



Caution


1. NJRC strives to produce reliable and high quality microwave components. NJRC's microwave components are intended for specific applications and require proper maintenance and handling. To enhance the performance and service of NJRC's microwave components, the devices, machinery or equipment into which they are integrated should undergo preventative maintenance and inspection at regularly scheduled intervals. Failure to properly maintain equipment and machinery incorporating these products can result in catastrophic system failures.
2. To ensure the highest levels of reliability, NJRC products must always be properly handled. The introduction of external contaminants (e.g. dust, oil or cosmetics) can result in failures of microwave components.
3. NJRC offers a variety of microwave components intended for particular applications. It is important that you select the proper component for your intended application. You may contact NJRC's sales office or sales representatives, if you are uncertain about the products listed in the catalog and the specification sheets.
4. Special care is required in designing devices, machinery or equipment, which demand high levels of reliability. This is particularly important when designing critical components or systems whose foreseeable failure can result in situations that could adversely affect health or safety. In designing such critical devices, equipment or machinery, careful consideration should be given to, amongst other things, their safety design, fail-safe design, back-up and redundancy systems, and diffusion design.
5. The products listed in the catalog and specification sheets may not be appropriate for use in certain equipment where reliability is critical or where the products may be subjected to extreme conditions. You should consult our sales office or sales representatives before using the products in any of the following types of equipment.
 - * Aerospace Equipment
 - * Equipment Used in the Deep Sea
 - * Power Generator Control Equipment (nuclear, steam, hydraulic)
 - * Life Maintenance Medical Equipment
 - * Fire Alarm/Intruder Detector
 - * Vehicle Control Equipment (automobile, airplane, railroad, ship, etc.)
 - * Various Safety Equipment
6. NJRC's products have been designed and tested to function within controlled environmental conditions. Do not use products under conditions that deviate from methods or applications specified in the catalog and specification sheets. Failure to employ NJRC's products in the proper applications can lead to deterioration, destruction or failure of the products. NJRC shall not be responsible for any bodily injury, fires or accidents, property damage or any consequential damages resulting from the misuse or misapplication of its products. PRODUCTS ARE SOLD WITHOUT WARRANTY OF ANY OF KIND, EITHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.
7. The product specifications and descriptions listed in the catalog and specification sheets are subject to change at any time, without notice.

* Above Specifications are subject to change without notice.

1. Overview

The features of Outdoor 250W AC/DC Power Supply Unit (PSU) are to provide the stable +48V DC power to operate BUCs, even if power supply of the equipment is not capable enough to operate the BUC. This unit employs the aluminum housing with corrosion-proof treatment on the surface and has waterproof and dust-proof constructor in order to use perfectly as the outdoor unit.

In addition, the outdoor AC/DC PSU complies with EC DIRECTIVE.

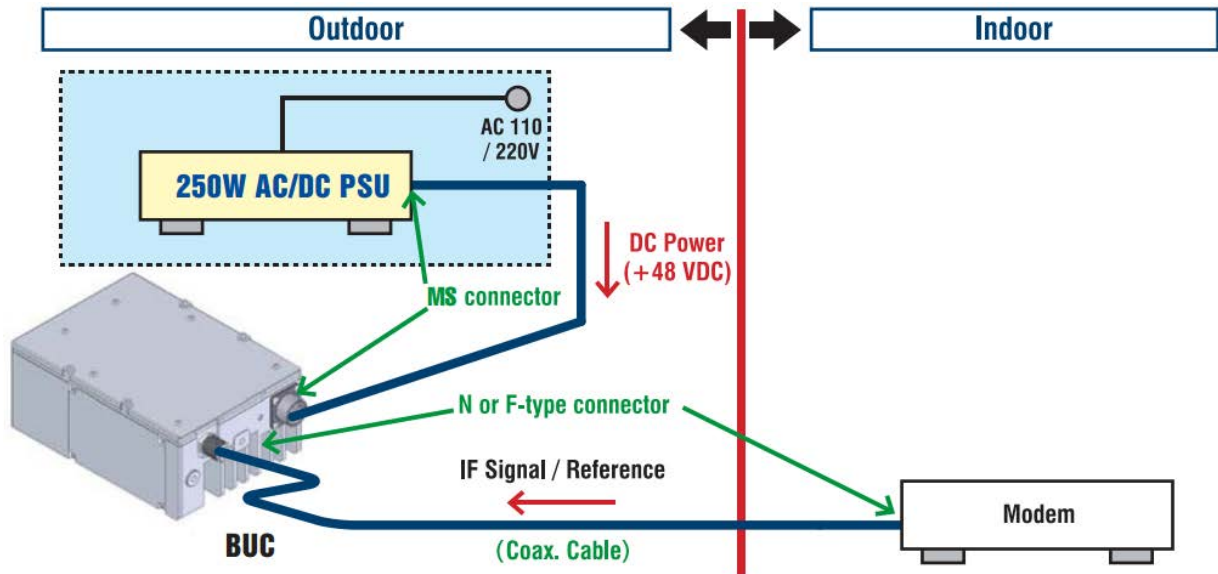

2. Electrical Specifications




2-1.	Input AC Voltage Range [Rated Range] [Absolute Maximum Rating]	100 to 240 VAC 90 to 264 VAC
2-2.	Input AC Frequency Range	50/60 Hz
2-3.	Input AC Current	3.6 A max.
2-4.	Output Voltage	+48 VDC nom. * Note 1
2-5.	Output Current	5.5 A max.
2-6.	Efficiency	90 % typ. * Note 2
2-7.	Maximum Output Power	250 W
2-8.	Power Factor	0.94 typ. * Note 2

*Note1: Voltage ripple corresponding to output power arises.

*Note2: The condition is 100 VAC as AC voltage input and 200 W as output power load .

* Above Specifications are subject to change without notice.

3. Mechanical Specifications

3-1.	<p>Input Interface</p> <p>[AC Input]</p> <p>[Option Port]</p>	<p>AC Connector: C016 20C003 200 12 Mating Connector: C016 20D003 210 12 (Amphenol eco mate connector)</p> <p>Assignment:</p>  <p>Pin 1: Live AC input Pin 2: Neutral AC input Pin 3: N.C. Pin PE: Frame Ground (GND)</p> <p>MS Connector: PT02E-12-8P(025) Mating Connector: PT06E-12-8S(470) (Amphenol connector)</p> <p>Assignment:</p>  <p>Pin A: Through Pin A in Output MS connector Pin B: Through Pin B in Output MS connector Pin C: Through Pin C in Output MS connector Pin D: Through Pin D in Output MS connector Pin E: Through Pin E in Output MS connector Pin F: Through Pin F in Output MS connector Pin G: Through Pin G in Output MS connector Pin H: Through Pin H in Output MS connector</p>
3-2.	<p>Output Interface</p> <p>[DC & Option Output]</p>	<p>MS Connector: PT02E-14-12S(025) Mating Connector: PT06E-14-12P(470) (Amphenol connector)</p> <p>Assignment:</p>  <p>Pin A: Through Pin A in Input MS connector Pin B: Through Pin B in Input MS connector Pin C: Through Pin C in Input MS connector Pin D: Through Pin D in Input MS connector Pin E: Through Pin E in Input MS connector Pin F: Through Pin F in Input MS connector Pin G: Through Pin G in Input MS connector Pin H: Through Pin H in Input MS connector Pin J: DC Output (+) / Prime Pin K: DC Output (-) / Return Pin L: N.C. Pin M: N.C.</p>
3-3.	<p>Dimension & Housing</p>	<p>186(L) x 133(W) x 60(H) mm [7.33" (L) x 5.24" (W) x 2.36" (H)] without interface connectors</p>
3-4.	<p>Weight</p>	<p>1.6 kg [3.5 lbs.]</p>
3-5.	<p>Surface Finish</p> <p>[Protective & Conformal Coating]</p> <p>[Finish Paint]</p>	<p>Trivalent Chromate Treatment</p> <p>Acrylic Paint, Ivory Color</p>
3-6.	<p>Cooling</p>	<p>Convection air cooling</p>

* Above Specifications are subject to change without notice.

4. Environmental Specifications


4-1.	Temperature Range (ambient) [Operating] [Storage]	-40 to +55 °C -40 to +75 °C
4-2.	Humidity	0 to 100 % Rh
4-3.	Dust/Waterproof	IP67
4-4.	Vibration	5 G [49.03 m/s ²] (3 axis, 50 Hz to 2 kHz) 1 mm p-p (3 axis, 5 to 50 Hz)
4-5.	Shock	30 G [294.20 m/s ²] (3 axis)
4-6.	Regulations	EU Directive (CE Marking) EMC (2004/108/EC) Low Voltage (2006/95/EC)
4-7.	Standard [Safety] [EMC]	IEC60950-1:2005 (2 nd Edition) EN60950-1:2006 EN61000-3-2 (Harmonic Current Emission Test) EN61000-3-3 (Voltage Fluctuations and Flicker Test) EN61000-4-2 (ESD Test) EN61000-4-3 (Radio-Frequency Electromagnetic Field Test) EN61000-4-4 (Electrical Fast Transient/Burst Test) EN61000-4-5 (Surge Test) EN61000-4-6 (Conducted Disturbance Radio-Frequency Test) EN61000-4-8 (Power Frequency Magnetic Field Test) EN61000-4-11 (Voltage Dips and Interruptions Test)
4-8.	Comply with RoHS (Restricting the use of Hazardous Substances) directives	

5. Accessories

- AC Connector (Plug socket) , Qty (1), Mating connector:
C016 20D003 210 12 (Amphenol)
- MS Connector (Plug pin) , Qty (1), Mating connector: PT06E-14-12P (470) (Amphenol)


* Above Specifications are subject to change without notice.

7. Label Product Label

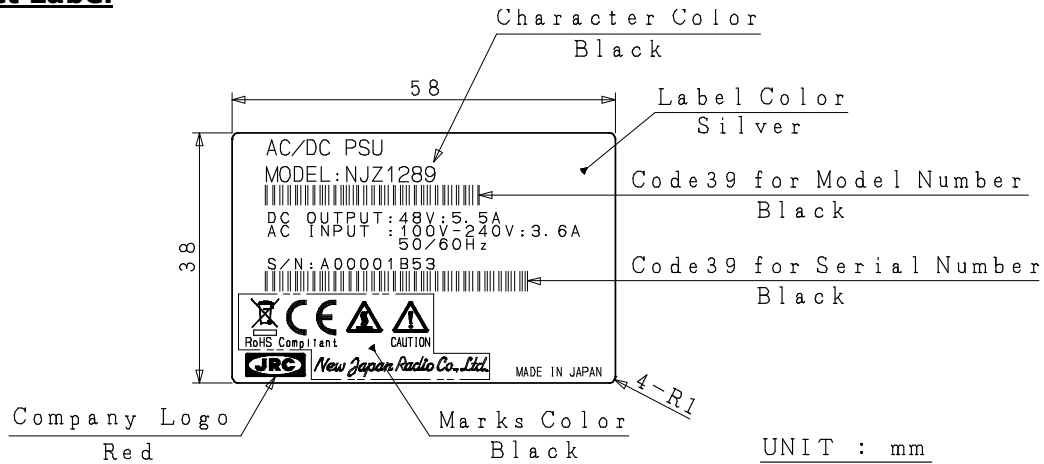

Definition of Serial Number

Serial Number (OSSSSRYM) - ALPHANUMERIC (9 characters)

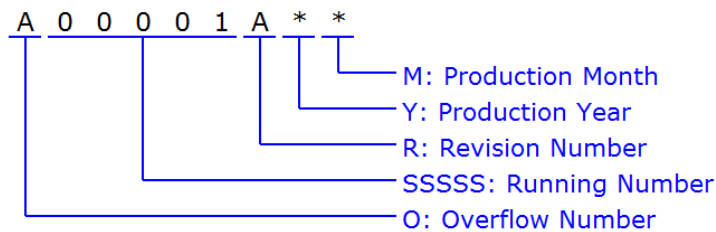

O: Overflow Number - ALPHABET (1 character)

"A" to "Z", e.g.: A99999 ⇒ B00001

SSSSS: Running Number - NUMBER (5 digits)

"00001" to "99999"

R: Revision Number - ALPHABET (1 character)

"A" to "Z"

Y: Production Year - NUMBER (1 digit)


Calendar Number, e.g.: 2009:9, 2010:0, 2011:1, 2012:2 ……

M: Production Month - ALPHANUMERIC (1character)


"1" to "9", "X" as October, "Y" as November, "Z" as December

* Above Specifications are subject to change without notice.

8. Package Package for PSU

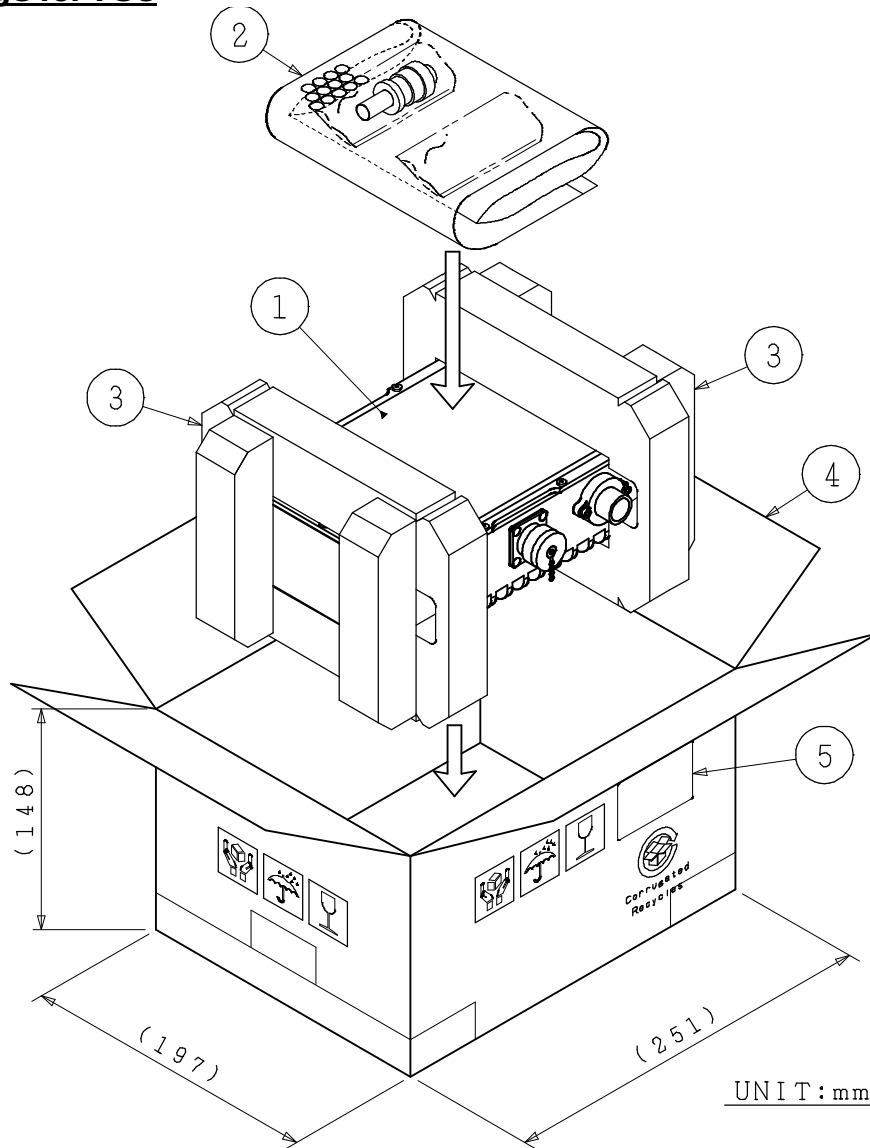

UNIT : mm




- ①: BUC
- ②: Accessories
 - MS mating connector
PT06E-14-12P-470:1 piece
 - AC mating connector
C016 20D003 210 12:1 piece
- ③: Polyethylene foam for package cushioning
- ④: Double-faced corrugated fiberboard
- ⑤: Label

* Above Specifications are subject to change without notice.

9. Connection Overview between BUC and 250W AC/DC PSU

ex.) for Ku 16W BUC: NJT8319 series

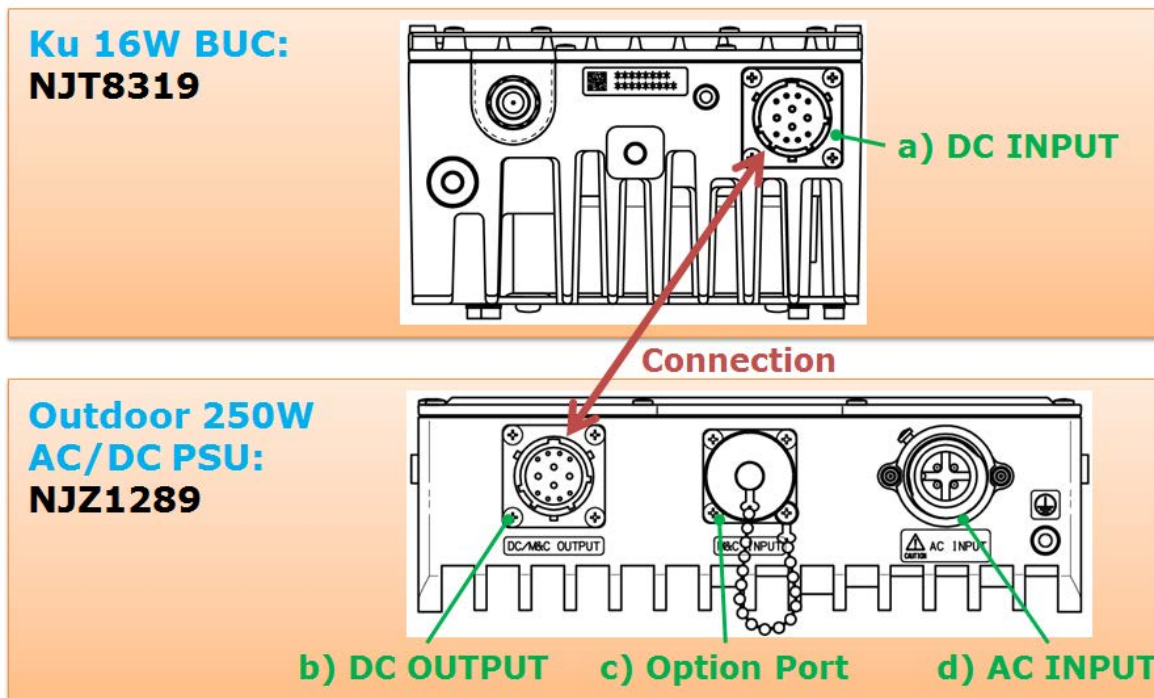

a) DC INPUT at NJT8319 (Ku 16W BUC)

- Product connector: PT02E-14-12P(025) [Amphenol / 12 pins, male]
 - Mating connector: PT06E-14-12S(470) [Amphenol / 12 sockets, female]
- * Mating connector is enclosed in the shipping package of NJT8319*




Pin No.	Item	Description
A	N.C.	-
B	N.C.	-
C	N.C.	-
D	N.C.	-
E	N.C.	-
F	N.C.	-
G	RS-232C Tx	
H	RS-232C Rx	
J	DC Input (+)	Prime: +36 to +60 V / DC Voltage
K	DC Input (-)	Return: GND
	RS-232C GND	
L	N.C.	-
M	N.C.	-

* Above Specifications are subject to change without notice.

b) DC OUTPUT at NJZ1289 (AC/DC PSU)


- Product connector: PT02E-14-12S(025) [Amphenol / 12 sockets, male]
 - Mating connector: PT06E-14-12P(470) [Amphenol / 12 pins, female]
- * Mating connector is enclosed in the shipping package of NJZ1289*



Pin No.	Item	Description
A	By-pass Port	Through Pin A in (c)'s MS connector
B	By-pass Port	Through Pin B in (c)'s MS connector
C	By-pass Port	Through Pin C in (c)'s MS connector
D	By-pass Port	Through Pin D in (c)'s MS connector
E	By-pass Port	Through Pin E in (c)'s MS connector
F	By-pass Port	Through Pin F in (c)'s MS connector
G	By-pass Port	Through Pin G in (c)'s MS connector
H	By-pass Port	Through Pin H in (c)'s MS connector
J	DC Output (+)	Prime: +48V typical, DC Voltage
K	DC Output (-)	Return: GND
L	N.C.	-
M	N.C.	-

c) Option Port at NJZ1289 (AC/DC PSU)

- Product connector: PT02E-12-8P(025) [Amphenol / 8 pins, male]
 - Mating connector: PT06E-12-8S(470) [Amphenol / 8 sockets , female]
- * Product connector is covered by the waterproof cap.*



Pin No.	Item	Description
A	By-pass Port	Through Pin A in (b)'s MS connector
B	By-pass Port	Through Pin B in (b)'s MS connector
C	By-pass Port	Through Pin C in (b)'s MS connector
D	By-pass Port	Through Pin D in (b)'s MS connector
E	By-pass Port	Through Pin E in (b)'s MS connector
F	By-pass Port	Through Pin F in (b)'s MS connector
G	By-pass Port	Through Pin G in (b)'s MS connector
H	By-pass Port	Through Pin H in (b)'s MS connector

d) AC INPUT at NJZ1289 (AC/DC PSU)

- Product connector: C016 20C003 200 12 [Amphenol / 3 pins + PE, male]
 - Mating connector: C016 20D003 210 12 [Amphenol / 3 sockets + PE, female]
- * Mating connector is enclosed in the shipping package of NJZ1289*




Pin No.	Item	Description
1	L (Live)	100 to 240 V, AC Voltage
2	N (Neutral)	100 to 240 V, AC Voltage
3	N.C.	-
PE	FG	GND

* Above Specifications are subject to change without notice.

Cable Option


- **Model No. NJZ1290A01**

Cable between NJZ1289 (250W AC/DC PSU) and AC Outlet
 Weatherized Cable / Length: 3m / AC Mating Connector assembled
 / No assembly in AC Outlet Side

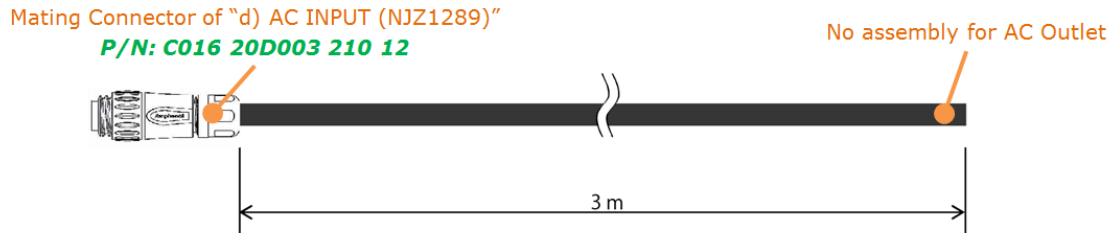

- **Model No. NJZ1290A02**

Connection Cable between NJT8319 (Ku 16W BUC) and NJZ1289 (250W AC/DC PSU)
 Weatherized Cable / Length: 5m / Two Mating Connectors assembled

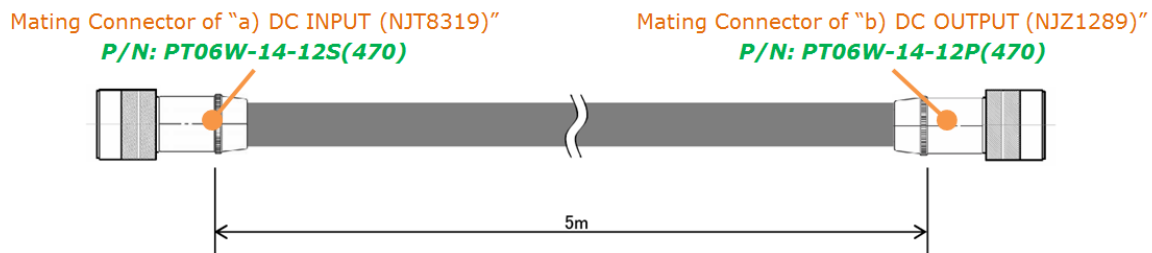

* Above Specifications are subject to change without notice.