



MICROWAVE COMPONENT

UNIVERSAL LNB CONTROLLER



MAIN FEATURES

- LNB control for multi-band LNB
- Generates 13 V or 18 V and 22 KHz tone
- 75 and 50 Ohm connectors available
- Universal power supply included
- 10 MHz reference source option
- Mounting Plate

CONFIGURATIONS

Connector Type	F (75 ohm), N (50 ohm) SMA (50 OHM)
Reference Signal	None, 10MHz internal, 10MHz injection port
Control Interface	Switch, Cable, Line Length Compensation with switch

HOW TO ORDER

ULC-0-50-CI

┌	└	CONTROL INTERFACE OPTION
		Blank - Switch Control only CI - Control Interface Cable LLC - Line Length Compensation with Switch
		CONNECTOR TYPE
└	┌	75 - 75 Ohm F connector 50 - 50 Ohm N connector 50s - 50 Ohm SMA connector
		REFERENCE
		0 - no reference 1 - 10 MHz reference 2F, 2N, 2S - 10 MHz injection port, F, N or SMA connector

ELECTRICAL SPECIFICATIONS

Input Voltage Range	23 ~ 25 VDC
Output Voltage Range	Band 1: 12.5 ~ 13.5 VDC Band 2: 17.3 ~ 18.7 VDC
Tone Frequency	20 ~ 24 kHz
Tone Amplitude	0.55 ~ 0.9 vpp
Power Consumption	450 mA/24V (no ref) 600 mA/24V (10MHz ref)
Operating Temperature	-30 to +60 °C
CI Option Logic Levels	L: 0 - 0.8 V H: 2.5 - 7 V (20mA)

22kHz Tone	Voltage	Line Length Compensation	Output
L	L	L	13V
L	H	L	18V
L	L	H	14V
L	H	H	19V
H	L	L	13V + tone
H	H	L	18V + tone
H	L	H	14V + tone
H	H	H	19 V+ tone

Click below models to place online order

MICROWAVE COMPONENT UNIT LNB CONTROLLER


MECHANICAL SPECIFICATIONS

Input Interface	F, N or SMA connector
Output Interface	F, N or SMA connector
DC Interface	2.5mm plug
Colour	White
Control Interface	Binder – 09-3391-00-04
Control Cable (2m)	Norsat P/N 035634 (Supplied with CI option)

POWER SUPPLY SPECIFICATIONS

Input Power	110 ~ 240 VAC
Output Power	24 VDC
AC Input Plugs included	Global Kit
Output Plug	2.5mm weatherproof

MECHANICAL DIAGRAM

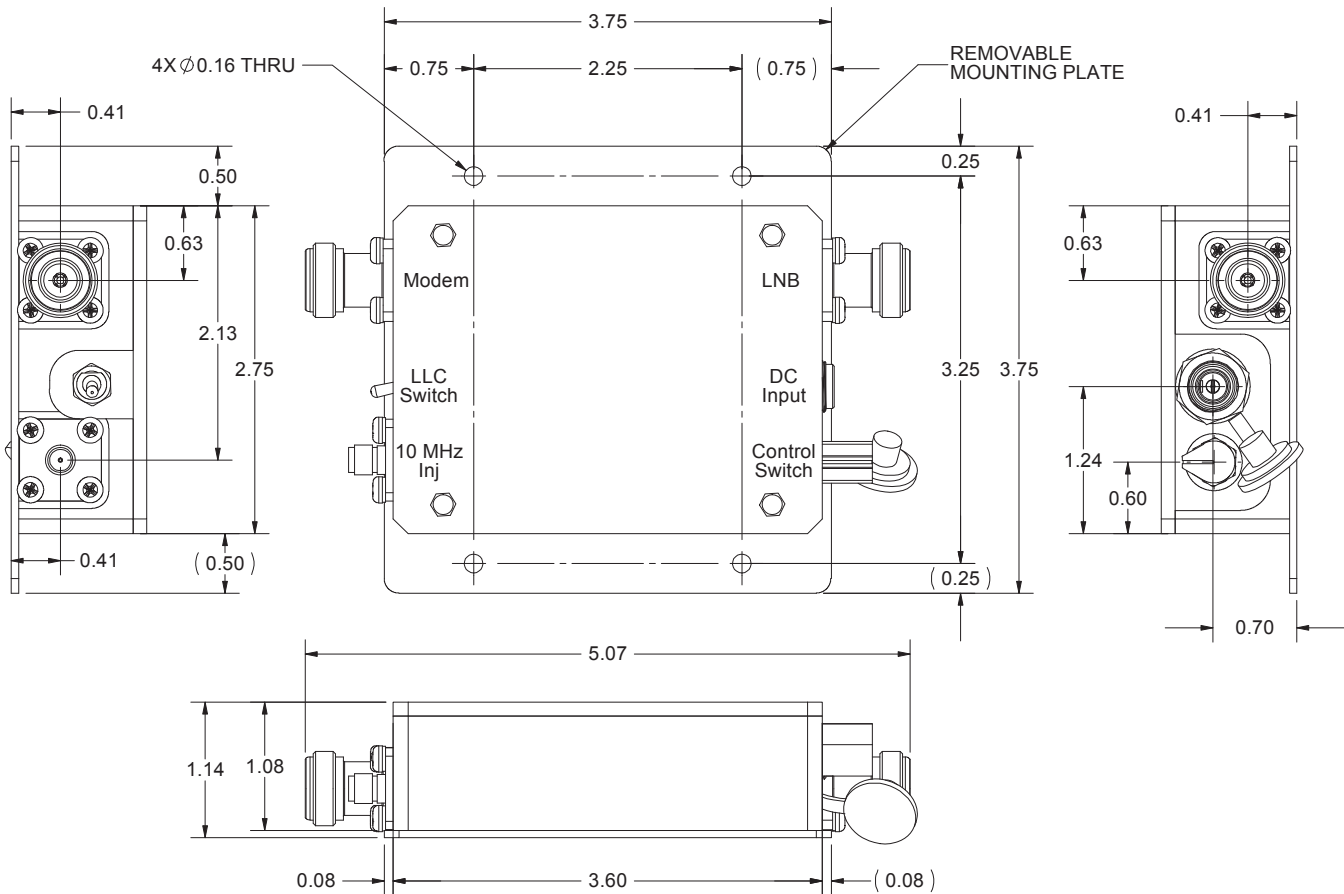

Click below models to place online order



Esatcom Inc
Norsat authorized distributor

Tel
718.276.0800

Email
sales@esatcom.com

ULC-1-50 **ULC-1-75**
ULC-0-50 **ULC-0-75**