



LNB

KU-BAND DUAL BAND EXT REF

1000XDF



SPECIFICATIONS

| | |
|---------------------------------------|---|
| Noise Figure | 0.8 dB typ., 1 dB max. at room temp. @ CF |
| L.O. Stability | Phase Locked to External Reference |
| Phase Noise (SSB) max. | Depends on External Reference |
| Input VSWR | 2.3 : 1 max. |
| Output VSWR | 2.3 : 1 max. |
| Gain | 60 dB typ., 55 dB min., 65 dB max. |
| Gain Flatness (over full band) | ≤ 5 dB p-p |
| Output P1dB | + 5 dBm min. |


| | |
|-------------------------------|--|
| DC Power | + 12V to + 24V DC (See below for Band Select) |
| Current | 250 mA max. |
| Input (waterproof) | WR-75 waveguide grooved |
| Output (waterproof) | F-Connector (75 Ohm) N-Connector (50 Ohm) |
| Dimensions (L x W x H) | 128 mm x 60 mm x 40 mm (5.0 in x 2.36 in x 1.57 in) |
| Weight | 400 g (14.11 oz) |
| Operating Temperature | - 40 to + 60°C |
| Storage Temperature | - 40 to + 80°C |
| External Ref Freq | 10 MHz (sine-wave), - 10 to 0 dBm |

FREQUENCY BANDS


| | Band 1 (13V) | Band 2 (18V) |
|-----------------------------|------------------------|------------------------|
| Frequency Band (GHz) | 10.70 - 11.70 | 11.70 - 12.75 |
| L.O. Frequency (GHz) | 9.75 | 10.6 |
| IF Frequency (MHz) | 950 - 1950 | 1100-2150 |

HOW TO ORDER

1008XDFN

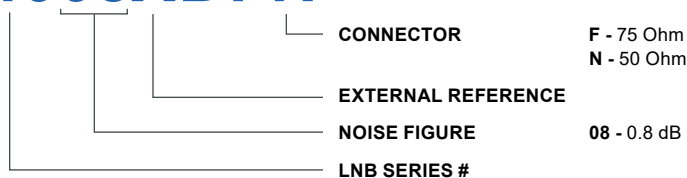

MECHANICAL DIAGRAM

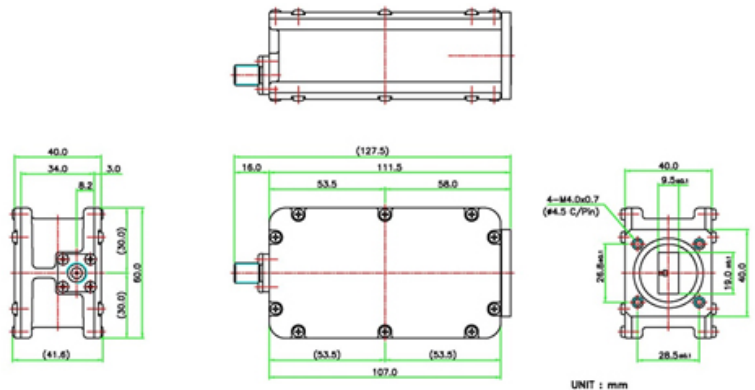

Esatcom Inc.
Authorized Norsat Distributor

Tel: 718.276.0800
www.esatcom.com

Email: sales@esatcom.com

