

# 2-band PLL LNB

## Key features



- Auto LO ref Ext. 10 MHz / Internal  $\pm 2.5$  ppm
- High P1dB and IP3
- Excellent Phase noise meets all profiles of DVB-S2X.
- Customized LO as option
- Wide operating temperature range
- Alarm and Monitoring & Control as option




### Description

The Ka-Band 2-band PLL LNBs are the choice for reception of one sub-band in the Ka Receive band 17.30 to 22.30 GHz.

SMW also offers Single band and 3 to 8 Multi-LO/sub-band switchable models, Ka Transmit band monitoring LNBs/BDCs/TLTs and LNA+BDCs systems for up to full Ka-Band simultaneous reception, with the same excellent performance and useful features.

Options include the daisy-chainable SMW M&C interface (RS-485/Modbus RTU), Sum alarm output, Customizable LOs, IF range up to 2150 MHz, Enclosure with additional fixing point and Waveguide input isolator for exceptional input matching.

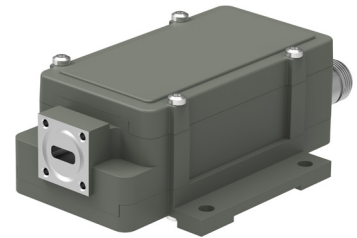

Optional enclosure fixing points



Optional Low loss isolator, std for LO 20.20 GHz and up VSWR 1.35:1 max.


LNB connector (standard)



**Connector A (standard)**

Type: N-f, (option F-f or SMA-f)  
Functions: L-Band out, DC in, External 10 MHz in

LNB connectors (optional)



**Connector B (optional)**

Type: M8 female, 4 pin, A-coded  
Functions: Alarm and M&C

Connector B (optional)



- 1 = Alarm open collector (max. 200 mA) or optionally DC input.
- 2 = A pos+ RS485
- 3 = B neg- RS485
- 4 = Common (GND)
- 5 = Shield

**Connector C (optional)**

Type: SMA-f only  
Functions: Ext. 10 MHz in and/or DC input


# 2-band PLL LNB

## Technical specifications


	MODELS/LO	16.80/17.40	17.20/18.20	17.25/18.25	17.45/18.25	18.20/19.20	18.25/19.25	19.20/20.20	19.25/20.25		
INPUT	Input freq. Band 1	17.75 - 18.75	18.20 - 19.20	18.20 - 19.20	18.40 - 19.20	19.20 - 20.20	19.20 - 20.20	20.20 - 21.20	20.20 - 21.20		
	Input freq. Band 2	18.35 - 19.35	19.20 - 20.20	19.20 - 20.20	19.20 - 20.20	20.20 - 21.20	20.20 - 21.20	21.20 - 22.20	21.20 - 22.20		
	IF MHz Band 1	950 - 1950	1000 - 2000	950 - 1950	950 - 1700	1000 - 2000	950 - 1950	1000 - 2000	950 - 1950		
	IF MHz Band 2	950 - 1950	1000 - 2000	950 - 1950	950 - 1950	1000 - 2000	950 - 1950	1000 - 2000	950 - 1950		
	Input	Flange PBR220, waveguide WR42									
	Pressurizable	0.1 bar max. (option)									
	DC Input	+11 to +26 V through output connector or separate SMA connector (optional), power consumption 5W max. Band switching: 13 (11.5 to 14.0V) / 18V (16.0 to 26 .0V) or 22 kHz Tone (optional via Monitoring & Control)									
	Input VSWR	2.3:1 typ., optional 1.35:1 max. with Low Loss Isolator (included @ LO $\geq$ 20.20 GHz)									
	INTERNAL	LO ref.	Auto LO ref. External 10 MHz ref / Internal $\pm$ 2.5 ppm -40 to +80°C								
		External LO ref.	Sine wave, Level -10 to +10 dBm. Supplied through output connector.								
LO Leakage		-60 dBm max. @ waveguide input									
Gain		60 dB typ. (55dB min.)									
Flatness		$\pm$ 0.4 dB within 30 MHz, $\pm$ 1.5 dB max. full band									
Noise figure		1.3 dB to 1.5 dB typ., increases with input frequency									
Phase Noise		-35 dBc @ 10 Hz -65 dBc @ 100 Hz -80 dBc @ 1 kHz -85 dBc @ 10 kHz -95 dBc @ 100 kHz -112 dBc @ >1 MHz typ.									
Image Rejection		30 dB min.									
OUTPUT	IF output	950-1950 MHz or 1000-2000 MHz. Custom extended IF up to 2150 MHz.									
	Output P1dB	+15 dBm min.									
	Output IP3	+25 dBm min.									
	Output VSWR	1.7:1 typ.									
	Output Connector	N-type 50 $\Omega$ , SMA-type 50 $\Omega$ or F-type 75 $\Omega$									
GENERAL	Alarm (optional)	Sum alarm, set via M&C to alarm in any combination of: LNA failure, Total current, LO lock (Ext/Int/n/a), signal power high/low, Supply voltage low. Open collector 3.3 to 28 V, max. 200 mA (pull-up 10 k Ohm at host side), pin 1 in M8 connector.									
	M&C (optional)	Via MODBUS RTU RS485 electrical interface, see document <a href="#">Monitoring and Control technical interface</a> for details. NOTE! Mates with M8 male connector/Cable, use only shielded CAT 5 cables									
	Dimensions	127x56x46 mm (N-connector, without Isolator), for other versions, please consult us.									
	Weight	354 g (N-connector)									
	Temperature range	Storage and operating: -40 to +80°C									
OPTIONS	Miscellaneous	Enclosed conductive O-ring, mounting screws (M3 x 8) 4 pcs									
	Options	Separate SMA connector for DC input or Ext. 10 MHz reference Alarm and Monitoring & Control Customized gain Customized LO Extended IF Input frequency from 17.20 GHz									

# 2-band PLL LNB

## Technical Drawing

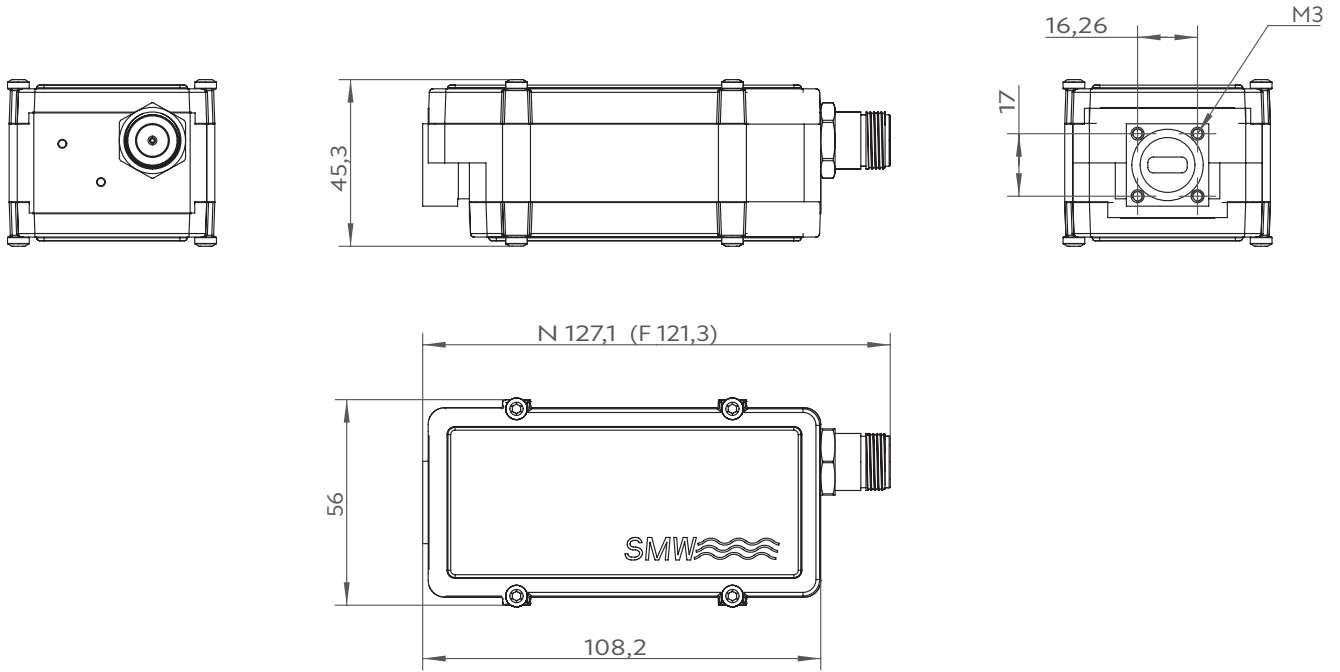

**OPTIONAL Low Loss Isolator,**  
included in models with LO  
≥20.20 GHz

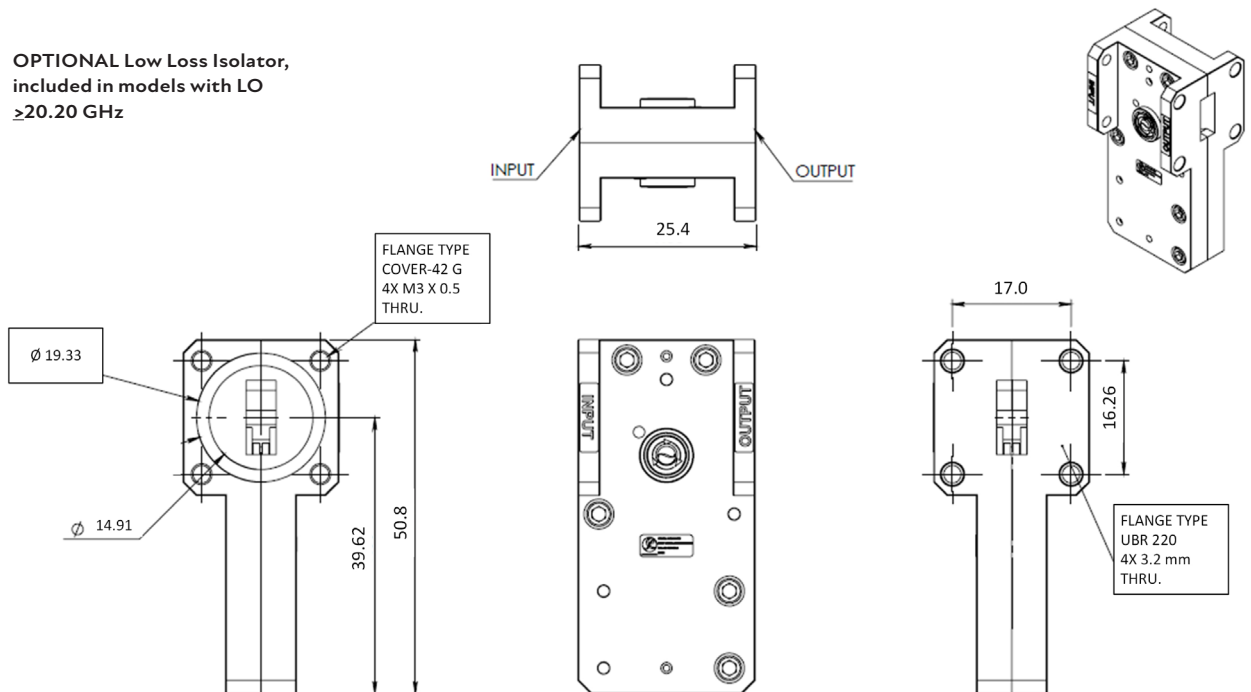

Professional Satcom Frequency Converters & Components. All products are fully CE and RoHS compliant and every unit includes full documentation of performance tests and quality control. Please contact [sales@smw.se](mailto:sales@smw.se) to configure or customize the unit to your needs. Visit [smw.se](http://smw.se) or scan QR code to see our full product range and request a quote.

